


For power connector, crimp terminals are supplied for hot, neutral and ground connections.

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

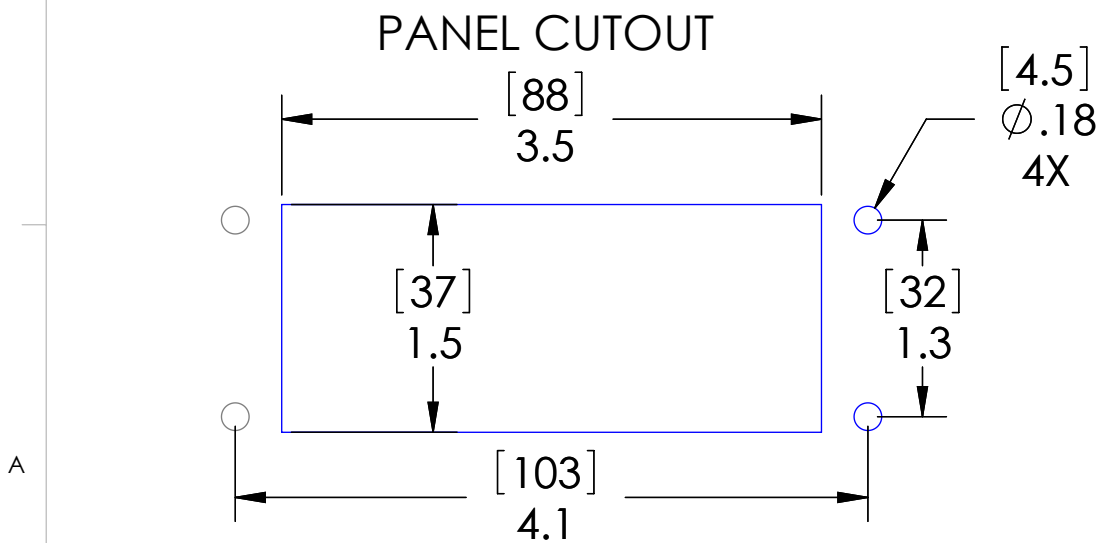

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

HOUSING MATERIALS		PIC RATINGS/SPECIFICATIONS	
BODY:	EPOXY COATED DIE CAST ALUMINUM	VOLTS:	125V
GASKET:	THERMOPLASTIC ELASTOMER	AMPS:	15A
HANDLE:	POLYAMIDE	SCCR:	10kA
LEVERS:	STAINLESS STEEL	NEMA/UL EN 60529:	4, 4X, 12 IP65
OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))		MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
<div>UNLESS OTHERWISE SPECIFIED:</div> <div>DIMENSIONS ARE IN INCHES AND [MM]</div> <div>UL LISTED ENCL. ACC. 5JR2</div> <div>PROPRIETARY AND CONFIDENTIAL</div> <div>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.</div>		MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
		INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
		WIRE STRIP LENGTH:	10 ~ 11 mm
		DO NOT SCALE DRAWING	
		DRAWN BY	ADM
		DRAWN DATE	07/13/2021
		CHECKED BY	DCG
		CHECK DATE	07/15/2021
		MENCOM CORPORATION	
		TITLE:	
		SMPLX; 3 RJ45; 16	
		SIZE	DWG. NO.
		B	DP1-3RJ45-16
		SCALE: 13:16	REV C
		WEIGHT:	SHEET 1 OF 1