


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/15/2005	BEM

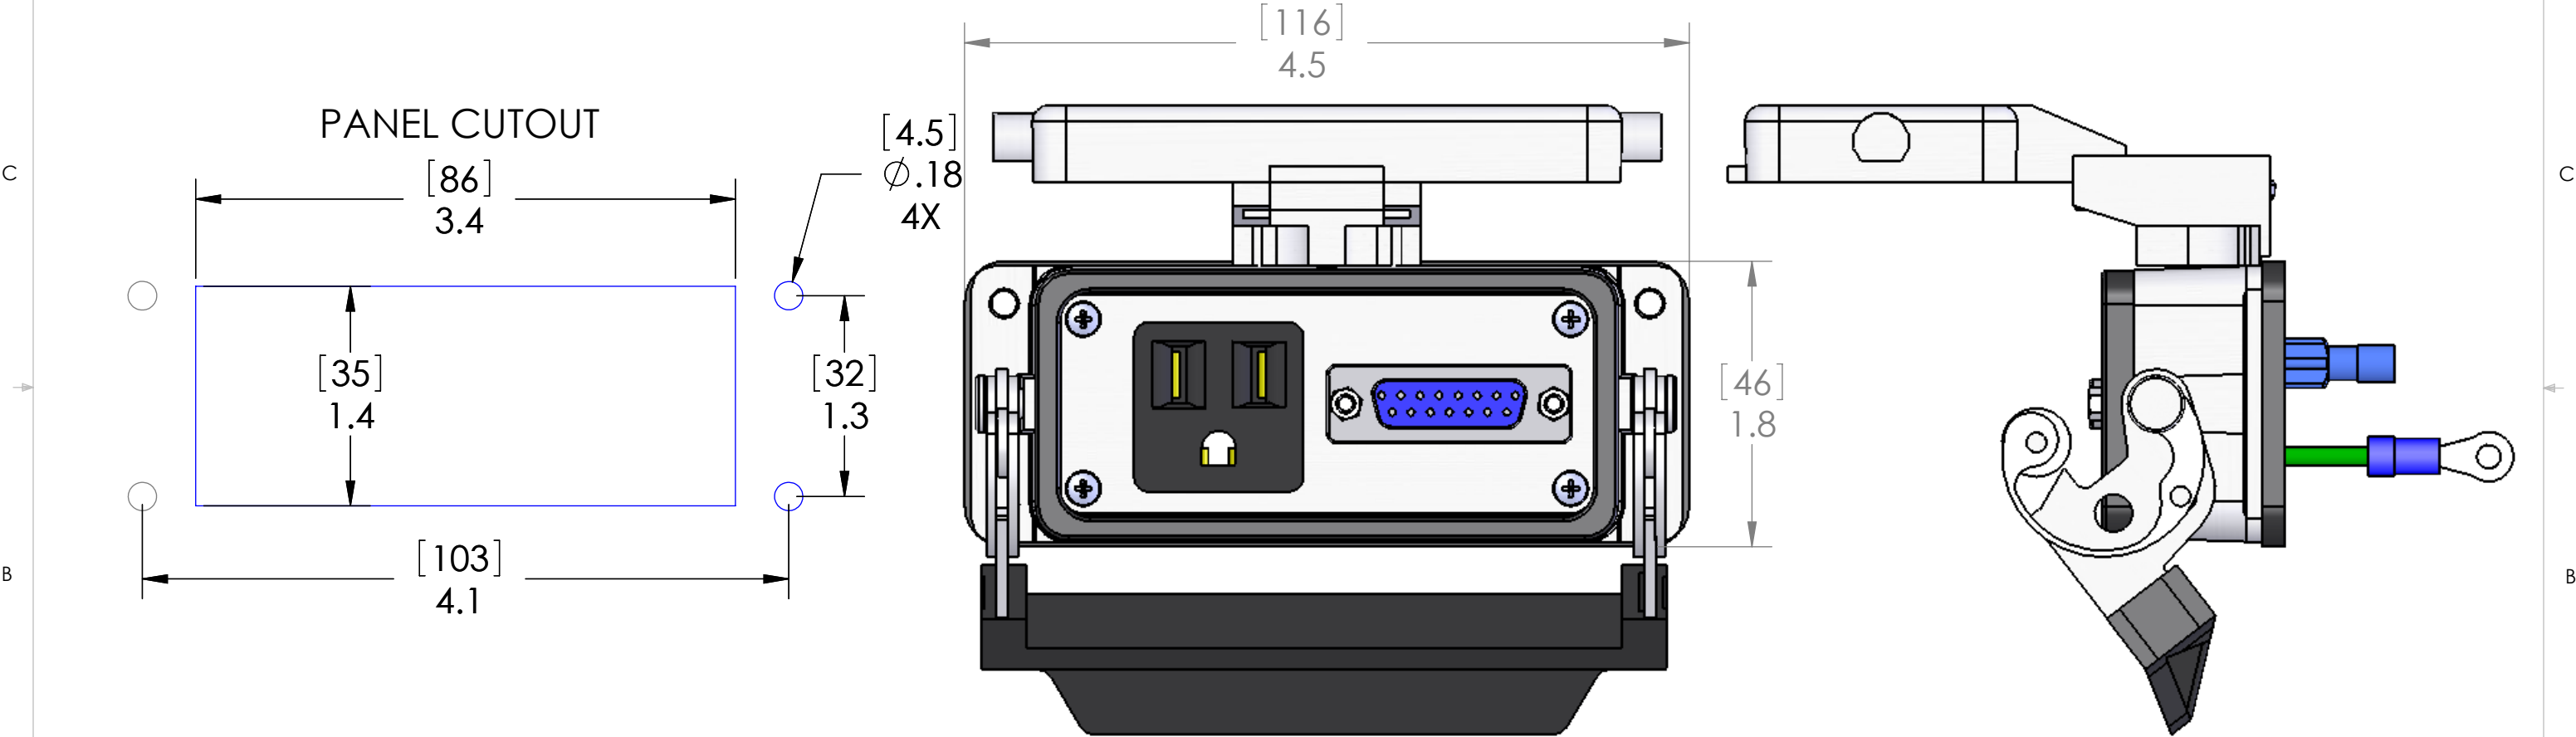

For power connection, crimp terminals are supplied for hot and neutral connection. Ground wire supplied with an M3 ring terminal applied to end of 6" ground lead.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
ALL D-SUBS	FEMALE	MALE

PIC RATINGS							
		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
VOLTS:	125V	DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	CAM		TITLE:	
AMPS:	15A		CHECKED				
SCCR:	10kA		ENG APPR.				
NEMA/UL:	4, 4X, 12		MFG APPR.				
			Q.A.				
<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.</p>		MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
		FINISH			<b>B</b>	DP1-DB15-16LS	<b>A</b>
				DO NOT SCALE DRAWING	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1