


For power connector, crimp terminals are supplied for hot and neutral connection. Ground wire supplied with an M3 ring terminal applied to end of 6" ground lead.

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.


These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

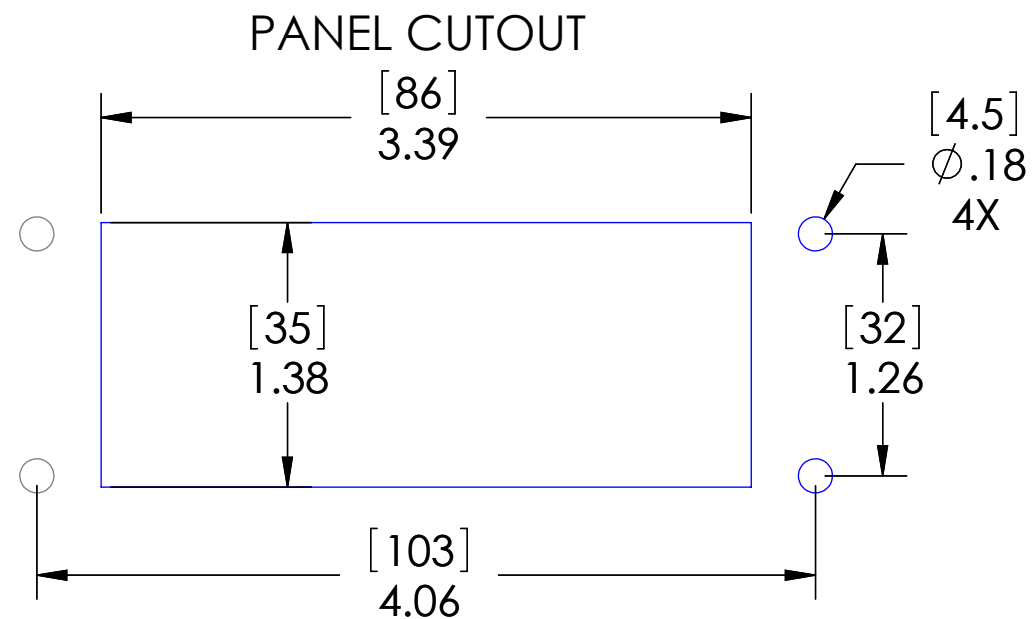

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK
ALL D-SUBS	FEMALE	MALE

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



HOUSING MATERIALS		SCCR:	10kA			
BODY:	EPOXY COATED DIE CAST ALUMINUM	NEMA/UL EN 60529:	4, 4X, 12 IP65			
GASKET:	THERMOPLASTIC ELASTOMER	MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)			
HANDLE:	POLYAMIDE	MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)			
LEVERS:	STAINLESS STEEL	INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG			
		WIRE STRIP LENGTH:	10 ~ 11 mm			
N WASHER, M4 NUT		UNLESS OTHERWISE SPECIFIED:	MENCOM CORPORATION			
		DRAWN BY				DCG
		DRAWN DATE				03/13/2019
		CHECKED BY				DCG
		CHECK DATE				03/13/2019
			TITLE: SMPLX; DB9; RJ45; 16			
		COMMENTS:	SIZE	DWG. NO.	REV	
			B	DP1-DB9-RJ45-16LS	B	
		DO NOT SCALE DRAWING	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	