


USB 3.0 TYPE A CONFIGURED FEMALE EXTERIOR / FEMALE INTERIOR
 9 PIN D-SUB CONFIGURED FEMALE EXTERIOR/ MALE INTERIOR

PANEL CUTOUT

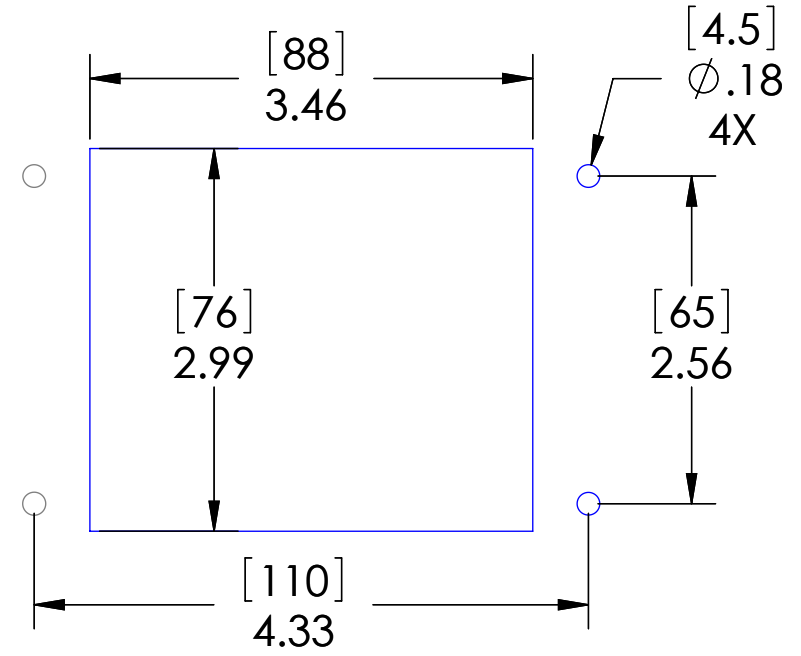


These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

| HOUSING MATERIALS | |
|-------------------|--------------------------------|
| BODY: | EPOXY COATED DIE CAST ALUMINUM |
| GASKET: | THERMOPLASTIC ELASTOMER |
| HANDLE: | POLYAMIDE |
| LEVERS: | STAINLESS STEEL |

| PIC RATINGS/SPECIFICATIONS | |
|----------------------------|---------------------------------|
| VOLTS: | 125V |
| AMPS: | 3A |
| SCCR: | 0.2kA |
| NEMA/UL EN 60529: | 4, 4X, 12 IP65 |
| MOUNTING SCREW SIZE: | M4 (8-32) (304 or 316SS for 4X) |
| MOUNTING SCREW TORQUE: | 1.2~1.8N-m (0.9~1.3 Lb-Ft) |
| INCOMING POWER WIRE SIZE: | 0.5 ~ 4.0 sq mm / 20-12AWG |
| WIRE STRIP LENGTH: | 10 ~ 11 mm |

OPERATING TEMPERATURE: (-10°C / +60°C (+14° F / +140° F))

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

| | |
|----------------------|--|
| MATERIAL | |
| FINISH | |
| DO NOT SCALE DRAWING | |

| | |
|------------|------------|
| DRAWN BY | DCG |
| DRAWN DATE | 07/09/2021 |
| CHECKED BY | GO |
| CHECK DATE | 01/19/2021 |

MENCOM CORPORATION

TITLE:
 SEMPLX;DB9;RJ45;USB-AA;3A;32

| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED | | |
|--|------------|------------|
| CONN. TYPE | EXTERIOR | INTERIOR |
| RJ45 | CAT 6 JACK | CAT 6 JACK |

| | | |
|---------------|-------------------------------------|--------------|
| SIZE B | DWG. NO. DP1-DB9-RJ45-USB-AFAF-R-32 | REV D |
| SCALE: 2:3 | WEIGHT: | SHEET 1 OF 1 |