



—9 PIN D-SUB CONFIGURED  
MALE EXTERIOR/ MALE INTERIOR

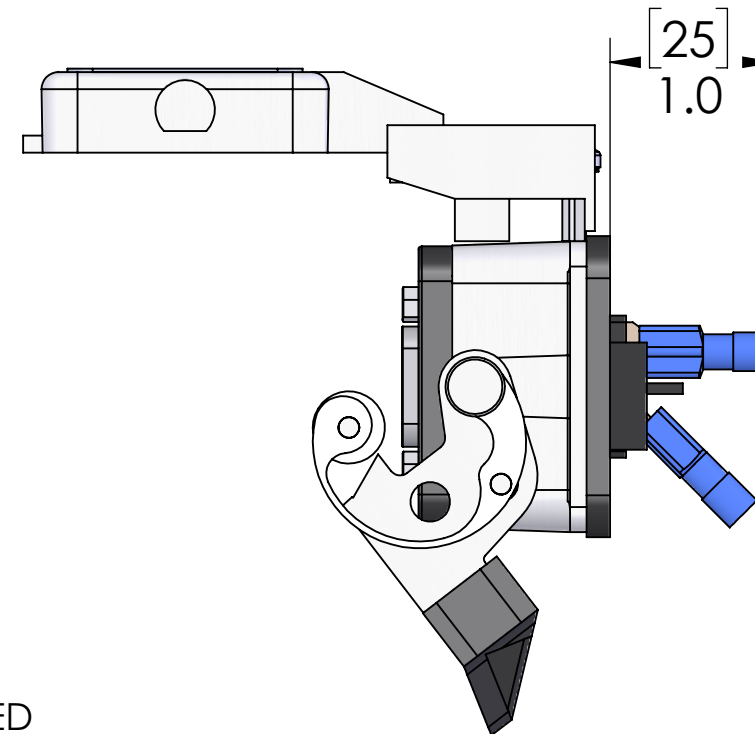

For power connector, crimp terminals are supplied for hot, neutral and ground connections.

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

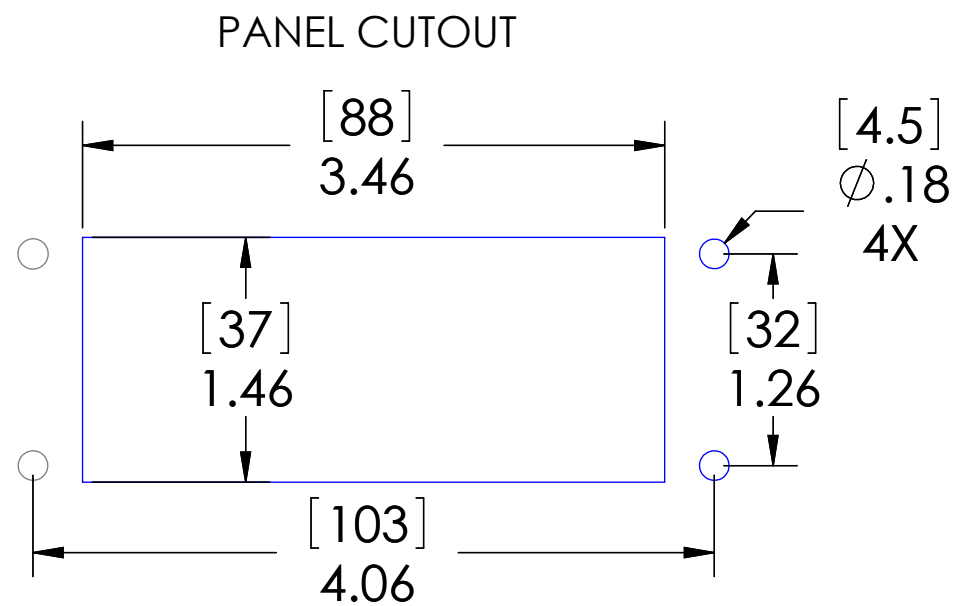

|         |                                |
|---------|--------------------------------|
|         | HOUSING MATERIALS              |
| BODY:   | EPOXY COATED DIE CAST ALUMINUM |
| GASKET: | THERMOPLASTIC ELASTOMER        |
| HANDLE: | POLYAMIDE                      |
| LEVERS: | STAINLESS STEEL                |

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F ))

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**



UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MM]

|  | MATERIAL |
|--|----------|
|--|----------|

|  |        |
|--|--------|
|  | FINISH |
|--|--------|

DO NOT SCALE DRAWING

| PIC RATINGS/SPECIFICATIONS |                                 |
|----------------------------|---------------------------------|
| VOLTS:                     | 125V                            |
| AMPS:                      | 15A                             |
| SCCR:                      | 10kA                            |
| NEMA/UL   EN 60529:        | 4, 4X, 12   IP65                |
| MOUNTING SCREW SIZE:       | M4 (8-32) (304 or 316SS for 4X) |
| MOUNTING SCREW TORQUE:     | 1.2~1.8N·m (0.9~1.3 Lb·Ft)      |
| INCOMING POWER WIRE SIZE:  | 0.5 ~ 4.0 sq mm / 20-12AWG      |
| WIRE STRIP LENGTH:         | 10 ~ 11 mm                      |

|     |            |            |
|-----|------------|------------|
| ED: | DRAWN BY   | DCG        |
|     | DRAWN DATE | 12/03/2021 |
|     | CHECKED BY | APR        |
|     | CHECK DATE | 12/03/2021 |
|     |            |            |
|     |            |            |

COMMENTS:

MENCOM CORPORATION

|        |                       |
|--------|-----------------------|
| TITLE: | SMPLX; DB9M; RJ45; 16 |
|--------|-----------------------|

|                  |                                |                 |
|------------------|--------------------------------|-----------------|
| SIZE<br><b>B</b> | DWG. NO.<br>DP1-DB9M-RJ45-16LS | REV<br><b>C</b> |
| SCALE: 7:8       | WEIGHT:                        | SHEET 1 OF 1    |

| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED |            |            |
|--|------------|------------|
| CONN. TYPE                                     | EXTERIOR   | INTERIOR   |
| RJ45   | CAT 6 JACK | CAT 6 JACK |