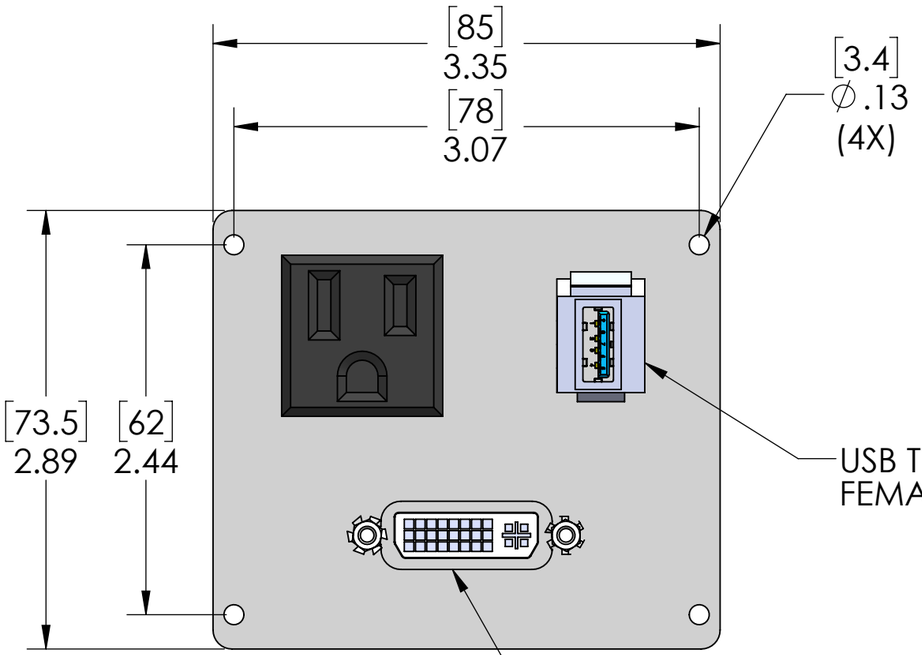


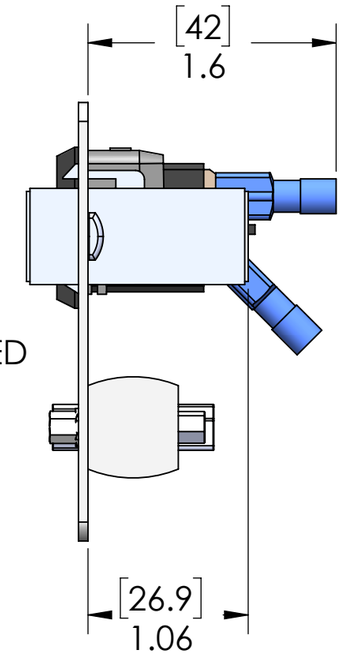


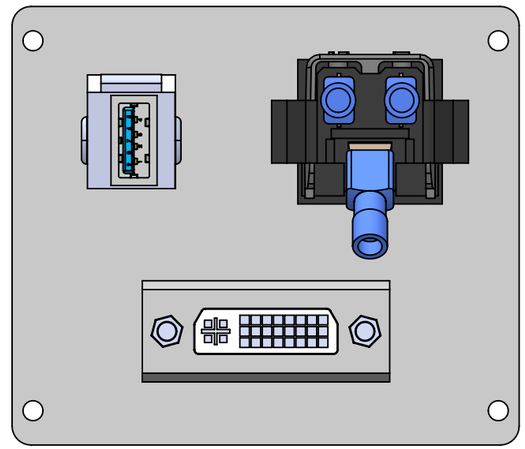

For power connector, crimp terminals are supplied for hot, neutral and ground connections.

| PIC RATINGS/SPECIFICATIONS | |
|---|---|
| VOLTS: | 125V |
| AMPS: | 3A |
| SCCR: | 0.2kA |
| INCOMING POWER WIRE SIZE: | 0.5 ~ 4.0 sq mm / 20-12AWG |
| WIRE STRIP LENGTH: | 10 ~ 11 mm |

| HOUSING MATERIALS | |
|---|---|
| PLATE: | 16 GA 304 STAINLESS STEEL |
| OPERATING TEMPERATURE: | (-10°C / +75° C (+14° F / +167° F )) |

c UL us

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | DCG |
| DRAWN DATE | 08/16/2021 |
| CHECKED BY | DCG |
| CHECK DATE | 08/18/2021 |

COMMENTS:

MENCOM CORPORATION

TITLE:

CC;SMPLX;DVI-I;USB AFAF;PL32

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | DP1-DVI-I-USB-AFAF-PL32 | C |

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.