

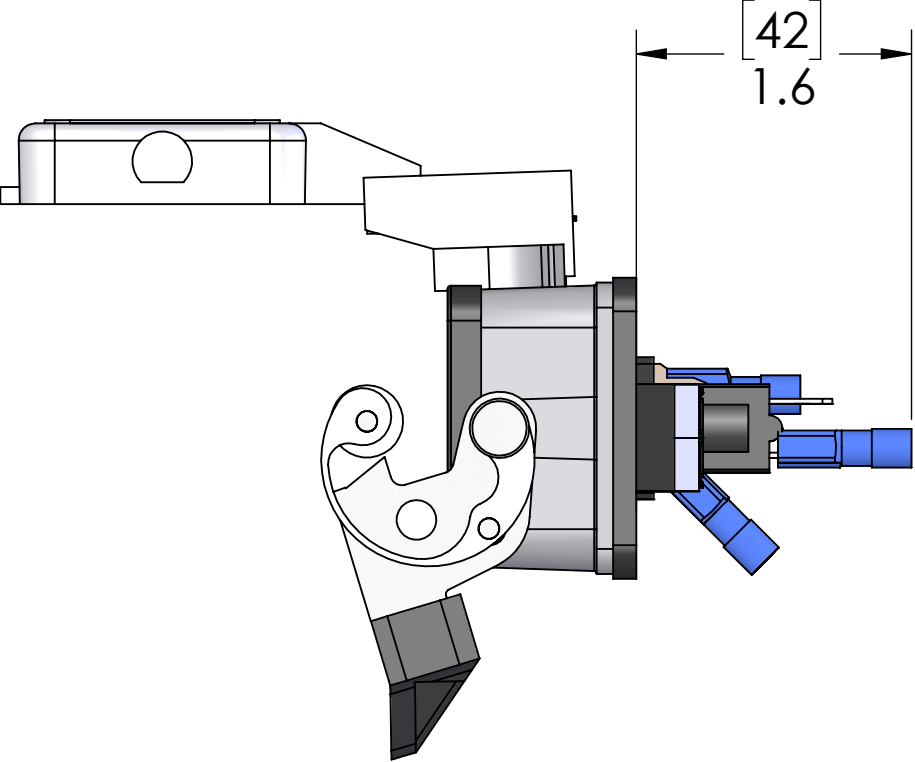


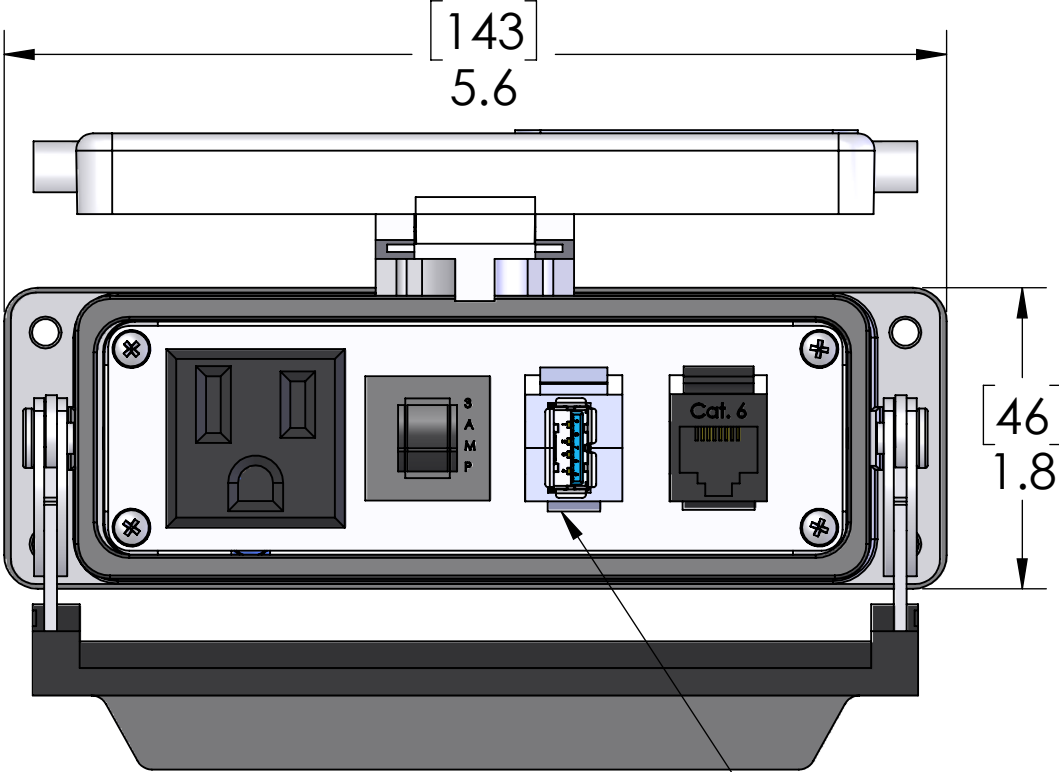

USB 3.0 TYPE A CONFIGURED
FEMALE EXTERIOR / FEMALE INTERIOR

For power connector, crimp terminals
are supplied for hot, neutral and
ground connections.

PANEL CUTOUT

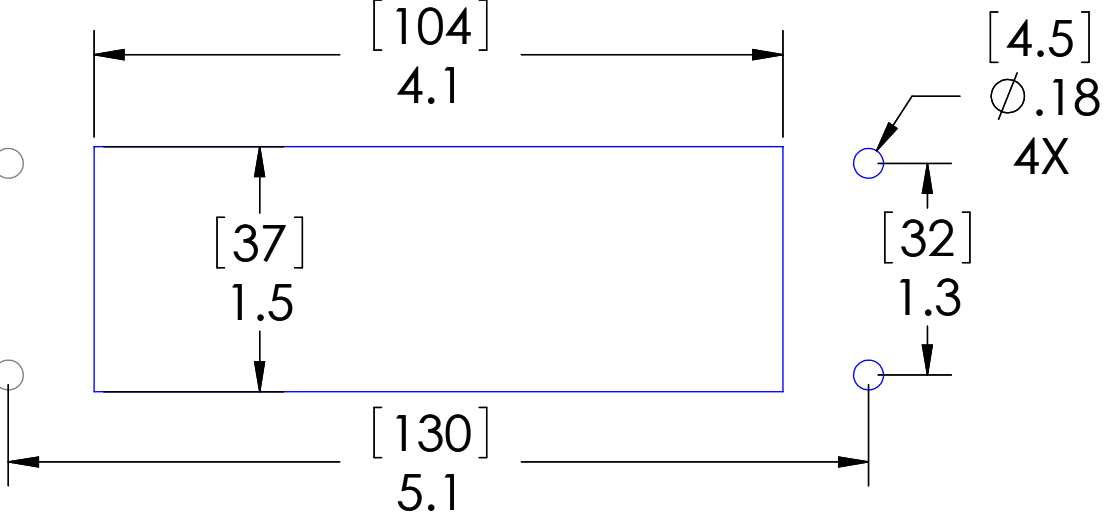

These devices shall be mounted on enclosures having adequate strength and thickness
and with adequate spacing provided. Seal rating is based on mounting to a surface that is
clean, flat and smooth.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/64
ANGULAR: MACH ±5° BEND ±5°
TWO PLACE DECIMAL ±.01
THREE PLACE DECIMAL ±.004

MATERIAL

FINISH

DO NOT SCALE DRAWING

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

MENCOM CORPORATION

TITLE:
SMPLX; RJ45; USB-AA; 3A; 24

SIZE	DWG. NO.	REV
B	DP1-RJ45-USB-AFAF-R-24	G
SCALE: 7:8	WEIGHT:	SHEET 1 OF 1