
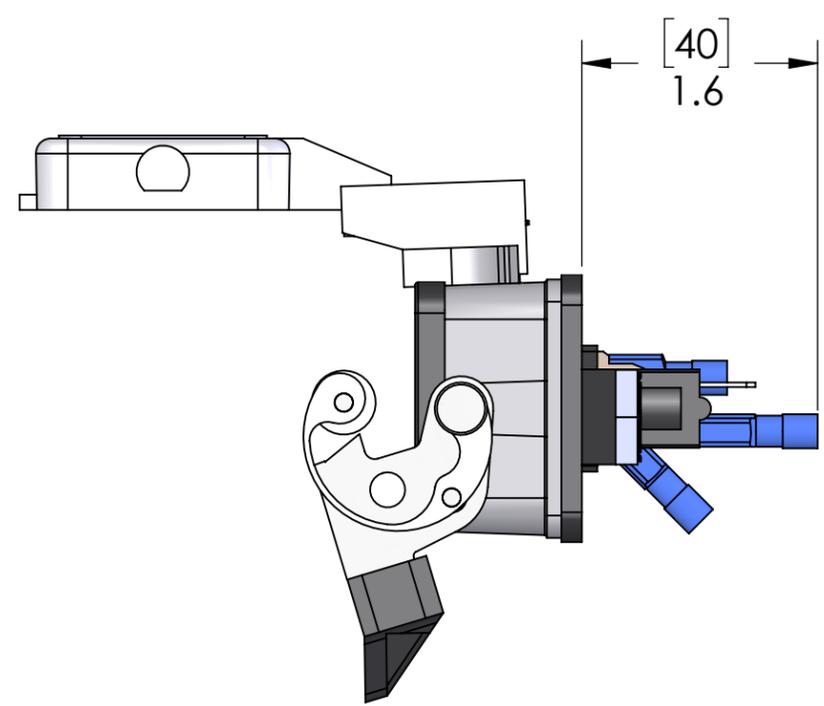


8 7 6 5 4 3 2 1

D  
C  
B  
A

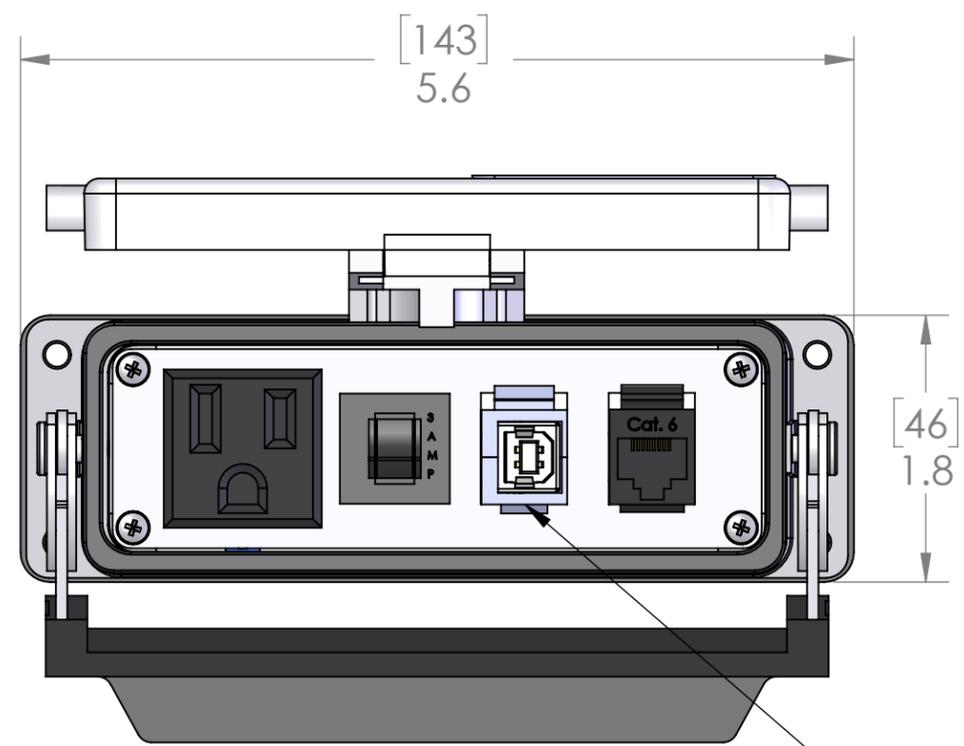


USB CONFIGURED  
TYPE B FEMALE EXTERIOR  
TYPE A FEMALE INTERIOR

For power connector, crimp terminals are supplied for hot, neutral and ground connections.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PANEL CUTOUT

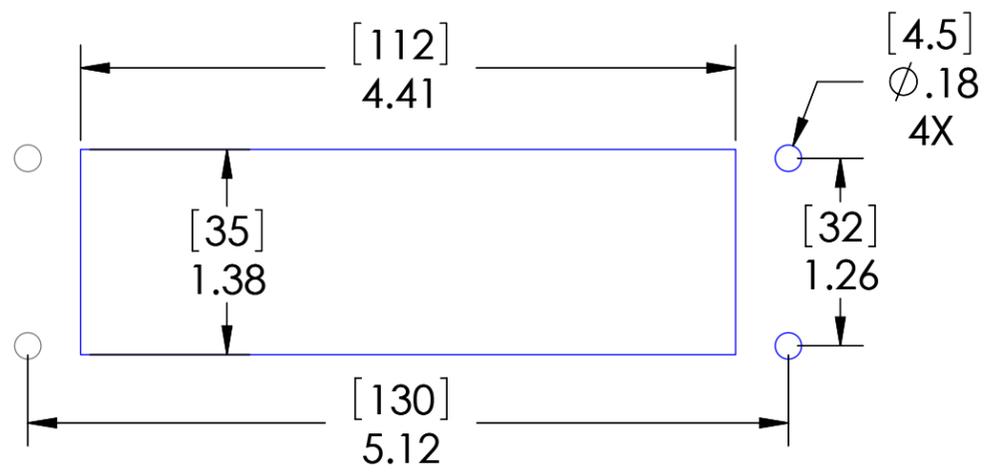

HOUSING MATERIALS		PIC RATINGS/SPECIFICATIONS	
BODY:	EPOXY COATED DIE CAST ALUMINUM	VOLTS:	125V
GASKET:	THERMOPLASTIC ELASTOMER	AMPS:	3A
HANDLE:	POLYAMIDE	SCCR:	0.2kA
LEVERS:	STAINLESS STEEL	NEMA/UL   EN 60529:	4, 4X, 12   IP65
OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))		MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
		MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
		INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
		WIRE STRIP LENGTH:	10 ~ 11 mm

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT  
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±1/64  
ANGULAR: MACH ±5° BEND ±5°  
TWO PLACE DECIMAL ±.01  
THREE PLACE DECIMAL ±.004

DRAWN BY	DCG
DRAWN DATE	07/12/2021
CHECKED BY	DCG
CHECK DATE	07/14/2021

MENCOM CORPORATION		
TITLE: SMPLX;RJ45;USB-BA;3A;24		
SIZE <b>B</b>	DWG. NO. DP1-RJ45-USB-BFAF-R-24	REV <b>E</b>
SCALE: 13:16	WEIGHT:	SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

8 7 6 5 4 3 2 1