


TS SYSTEM ALLOWS UNIT TO BE SNAP FASTENED ONTO DIN EN 50022 RAIL.

OR

MOUNTING HOLES IN BOTTOM OF UNIT ALLOW FOR MOUNTING INSIDE OF PANELS WITH FIXED FASTENERS

For power connector, crimp terminals are supplied for hot and neutral connection. Ground wire supplied with an M3 ring terminal applied to end of 6" ground lead.

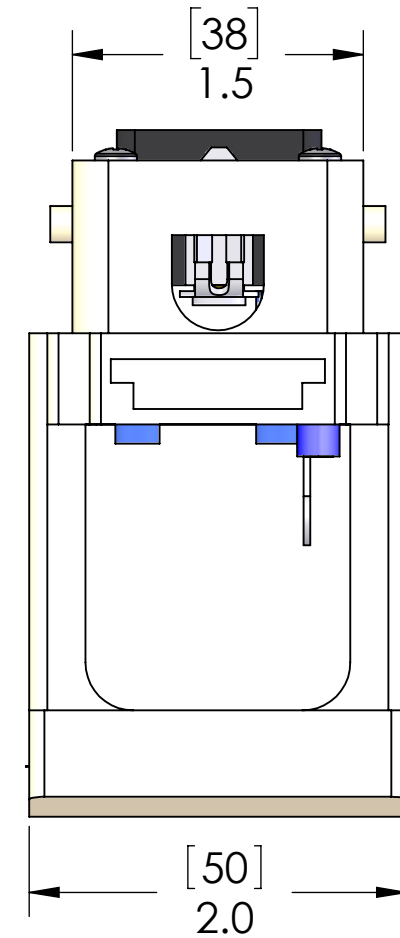

MATERIALS	
BODY:	POLYAMIDE
PLATE:	STAINLESS STEEL

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	15A
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
DRAWN BY:	DCG
DRAWN DATE:	07/02/2019
CHECKED BY:	DCG
CHECK DATE:	07/02/2019

MENCOM CORPORATION
 TITLE:
 DINRAIL; SIMPLX SZ 06

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

COMMENTS:

SIZE	DWG. NO.	REV
B	DP1-TS	B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1