
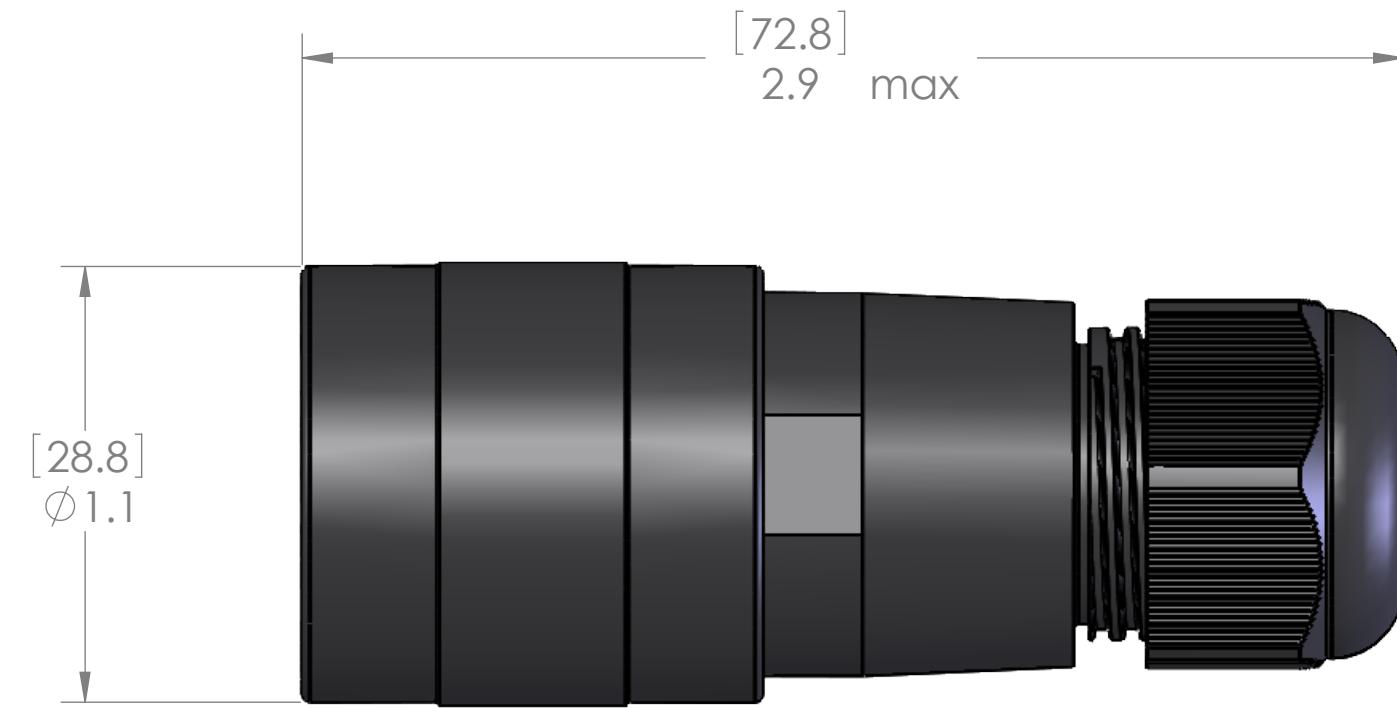


8 7 6 5 4 3 2 1

D

D

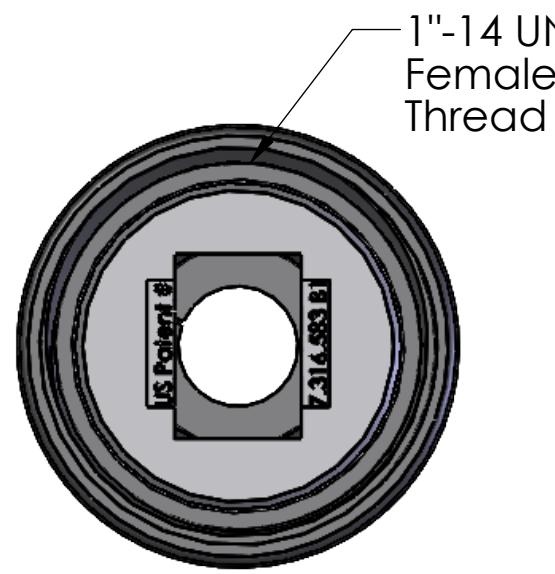

For assembly instructions see Instruction Sheet (Page 2)
Cable range: 5-13mm

MATERIALS:	
BODY & CAP:	BLACK POLYAMIDE
GROMMET:	TPE
COUPLING:	BLACK ANODIZED ALUMINUM
O-RING:	NBR
CERTIFICATIONS:	
SEAL:	UL TYPE 4 & 6P
	IP67
US:	UL LISTED
CANADA:	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	08/26/2020
	CHECKED BY	GO
	CHECK DATE	08/26/2020
COMMENTS:		
SIZE	DWG. NO.	REV
B	E45V3-8MP-FW	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 2

MENCOM CORPORATION

A
TITLE:
FW E45V3 PLUG

8 7 6 5 4 3 2 1

D

D

B

B

A


A

8 7 6 5 4 3 2 1


Assembly Instructions



STEP 1.) Remove clip by cutting or by bending it back and forth until it breaks.

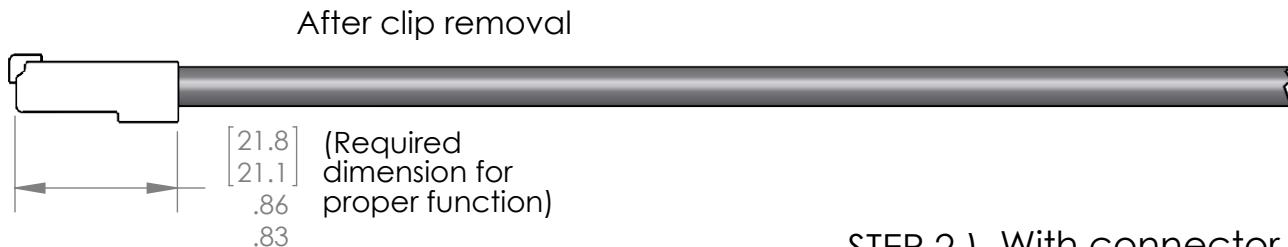

STEP 2.) With connector unassembled, push cable through dome nut, split apart the grommet and wrap it around the cable, then push the cable through the remainder of the connector.



STEP 3.) Push grommet back into the "fingers" of the shell. Rotate cable 90 degrees and pull it back into connector until it stops. With slight tension on cable, tighten dome nut (3.75Nm recommended).

