



—(2X) 9 PIN D-SUB CONFIGURED
MALE EXTERIOR /
MALE INTERIOR

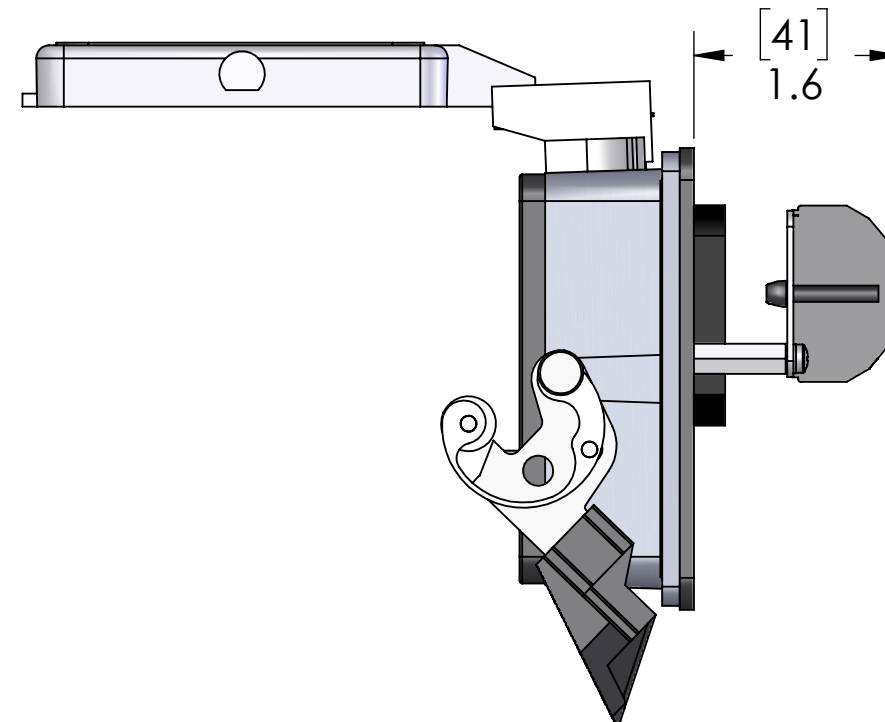

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

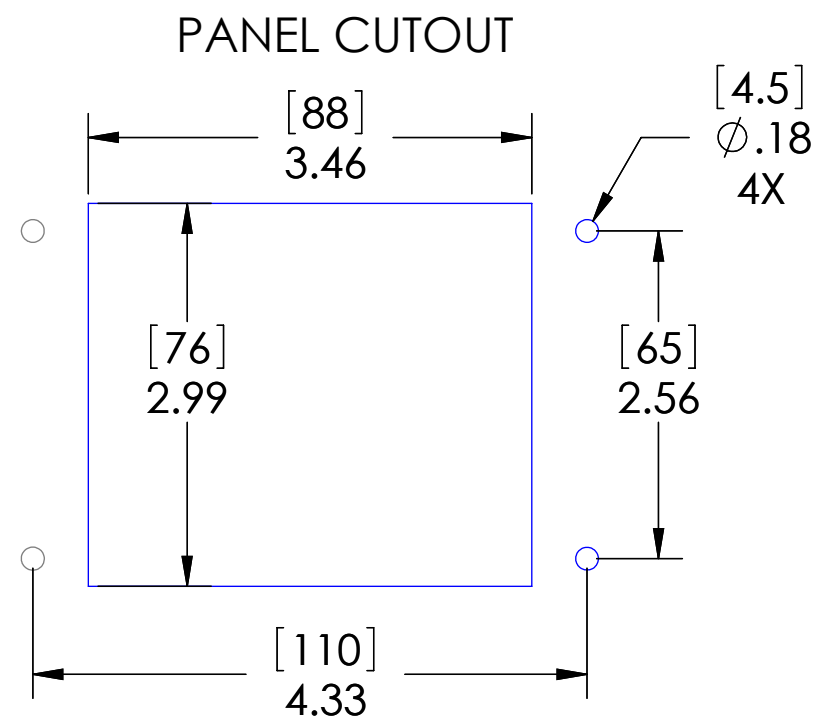


MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.



HOUSING MATERIALS		NEMA/UL EN 60529:		4, 12 IP65				
BODY:	EPOXY COATED DIE CAST ALUMINUM	PANEL THICKNESS:		5.0mm max				
		MOUNTING SCREW TORQUE:		0.8N-m				
GASKET:	THERMOPLASTIC ELASTOMER	TERMINAL BLOCK TORQUE:		0.5N-m				
HANDLE:	POLYAMIDE	INCOMING POWER WIRE SIZE:		0.25 - 2.5 sq mm / 24-12AWG				
LEVERS:	STAINLESS STEEL	WIRE STRIP LENGTH:		7 - 8 mm				
N WASHER, M4 NUT		UNLESS OTHERWISE SPECIFIED:	DRAWN BY	DCG		MENCOM CORPORATION TITLE: GF; 2DB9 MM; 32		
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	11/21/2018				
			CHECKED BY	GO				
			CHECK DATE	11/26/2018				
			COMMENTS:		SIZE		DWG. NO.	REV
			MATERIAL		B		GF-2DB9M-32	D
			FINISH					
	DO NOT SCALE DRAWING	SCALE: 2:3		WEIGHT:	SHEET 1 OF 1			