




D

С

В

А

8

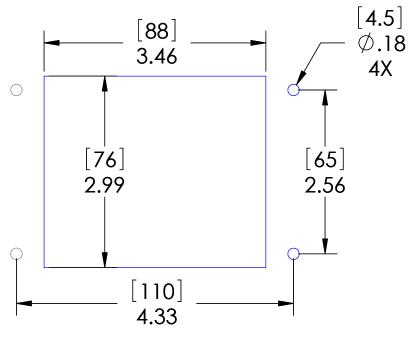


7

6

				VOLTS:	
		HOUSING MATERIALS			
	BODY:	EPOXY CO	ATED DIE CAST	SCCR:	
	BODT.	ALUMINUM	NEMA/UL		
	GASKET:	THERMOPL	ASTIC ELASTOMER	MOUNT	INC
	HANDLE:	POLYAMID	E	MOUNT	INC
	LEVERS:	STAINLESS	STEEL	INCOMING	
OPERATING TEMPERA	TURE: (-35°	C / +66° C ((-30° F / +150° F))	WIRE S	TR
MOUNTING KIT ORDERED)		UNLESS OTHERWISE SPECIFIED:	DRAWN BY	
					07,
M4x0.7 SS SCREW, NYLO			AND [MM]	CHECKED BY	
SPLIT LOCKWASHER AND	M4 NUT	LISTED		CHECK DATE	07
P/N: D-PIC-MT		ENCL. ACC. 5JR2			
		JJNZ			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS			MATERIAL	COMMENTS	s:
DRAWING IS THE SOLE PROPERTY OF			MATERIAL		
MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE			FINISH	-	
WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS				-	
PROHIBITED.			DO NOT SCALE DRAWING		1
5	4		3		

\sim		
/		



С

D

1

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

В

	PIC RA	TING	S/SP	ECIFICATIO	ONS			
				125V				
				15A				
				10kA				
JL EN 6	60529: 4, 4X, 12 IF		IP65					
NG SCRE	W SIZE: M4 (8-32) (304 or		304 or 3	316SS for 4X)				
NG SCRE	W TORG	UE:		1.2~1.8N-n	n (0.9~1	.3 Lb-Ft)	
NG POWE	R WIRE	SIZE	:	0.5 ~ 4.0 s	q mm /	20-12AV	VG	
TRIP LENG	GTH:			10 ~ 11 mr	n			
DCG	٨.٨		$\sim \sim$				ואר	
07/12/2021	MENCOM CORPORATION							
DCG	TITLE:							
07/14/2021		СГ	. 05					A
		Gг	, ZL	DB9 M EX		NI; 3Z		
	SIZE D	WG.						-
		wG.			0.00		REV	
	B		G	F-2MDB	9-32		E	
	SCALE: 2:	:3	WE	GHT:		SHEET	1 OF 1	
	2					1		1