


FEMALE USB TYPE A (2X)

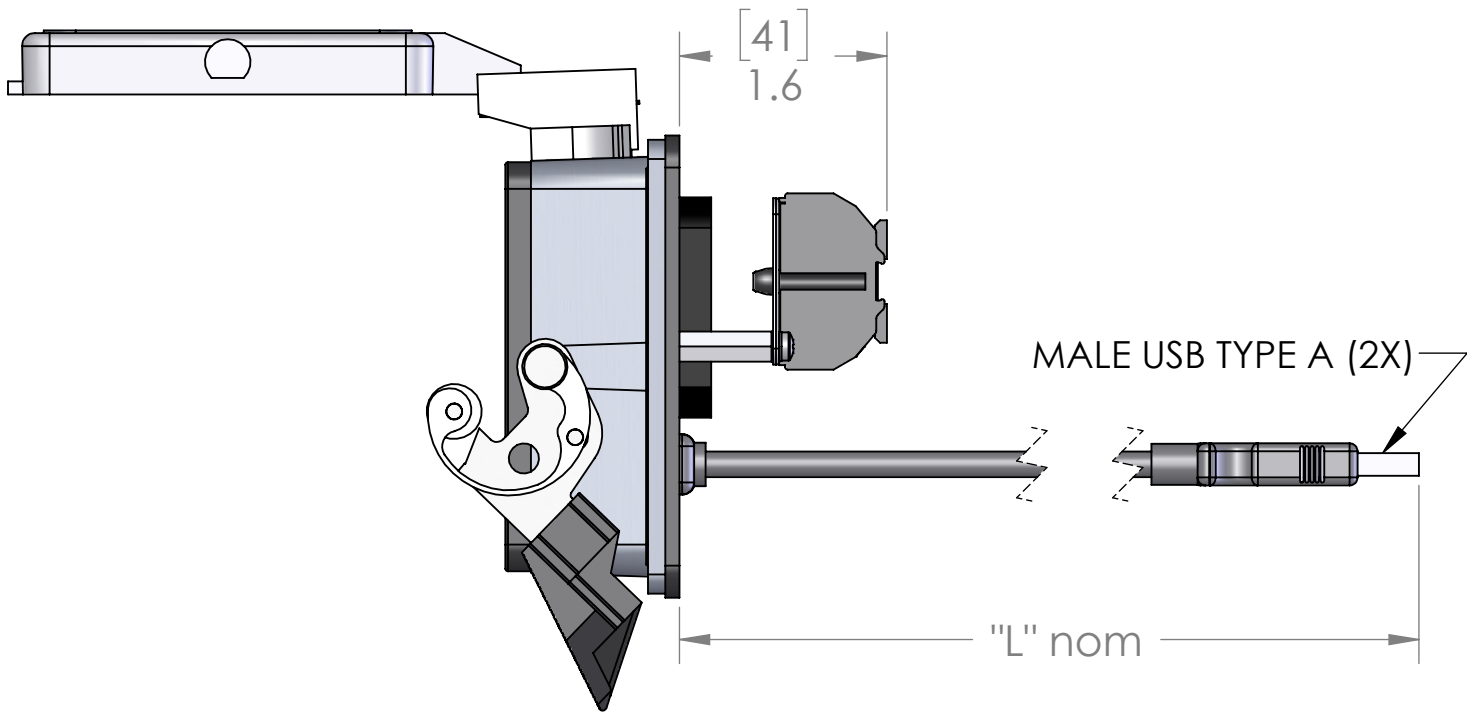

MALE USB TYPE A (2X)


"L" nom

PART NUMBER	LENGTH "L"
GF-2USB-03-32	3 FEET
GF-2USB-06-32	6 FEET
GF-2USB-10-32	10 FEET


A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PANEL CUTOUT

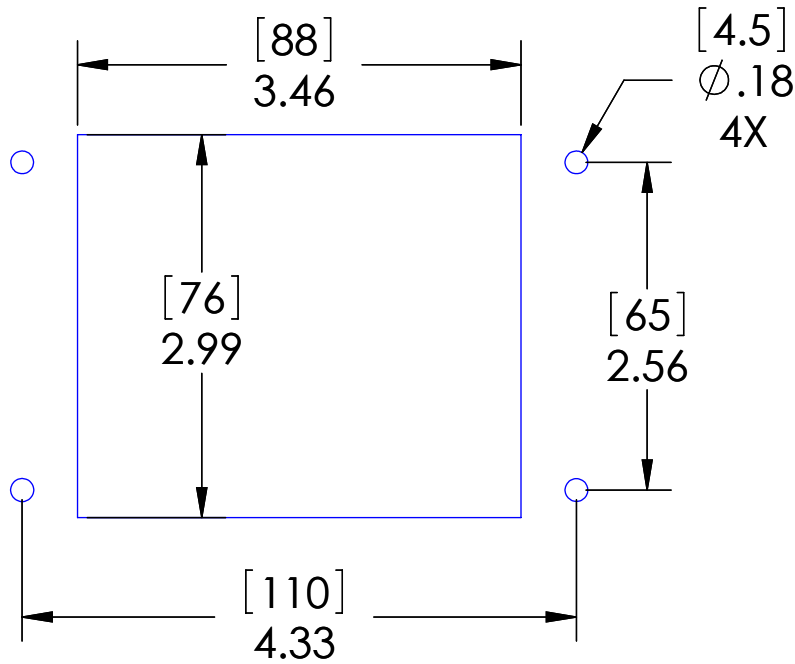

MOUNTING KIT ORDERED SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT  
P/N: D-PIC-MT

HOUSING MATERIALS		NEMA/UL   EN 60529:		4, 12   IP65	
BODY:	EPOXY COATED DIE CAST ALUMINUM	PANEL THICKNESS:		5.0mm max	
GASKET:	THERMOPLASTIC ELASTOMER	MOUNTING SCREW TORQUE:		0.8N-m	
HANDLE:	POLYAMIDE	TERMINAL BLOCK TORQUE:		0.5N-m	
LEVERS:	STAINLESS STEEL	INCOMING POWER WIRE SIZE:		0.25 - 2.5 sq mm / 24-12AWG	
		WIRE STRIP LENGTH:		7 - 8 mm	
<div><p>WASHER, 4 NUT</p></div>		UNLESS OTHERWISE SPECIFIED:		<div>MENCOM CORPORATION</div> <div>TITLE:</div> <div>CC; GFI; 2 USB-PCBL; 32</div>	
		DRAWN BY	DCG		
		DRAWN DATE	11/21/2018		
		CHECKED BY	GO		
		CHECK DATE	11/26/2018		
		COMMENTS:		SIZE	
				DWG. NO.	
				REV	
				B	
				GF-2USB-ZZ-32	
				B	
		DO NOT SCALE DRAWING		SCALE: 2:3	
				WEIGHT:	
				SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

