

RJ 11


25 PIN D-SUB CONFIGURED
FEMALE EXTERIOR /
MALE INTERIOR

NOTE: RJ11 JACK IS TECHNICALLY AN
RJ12 JACK IN THAT IT HAS ALL 6 CONTACTS.
IT IS SUITABLE FOR USE WITH ALL RJ11 AND
RJ12 APPLICATIONS.

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PANEL CUTOUT

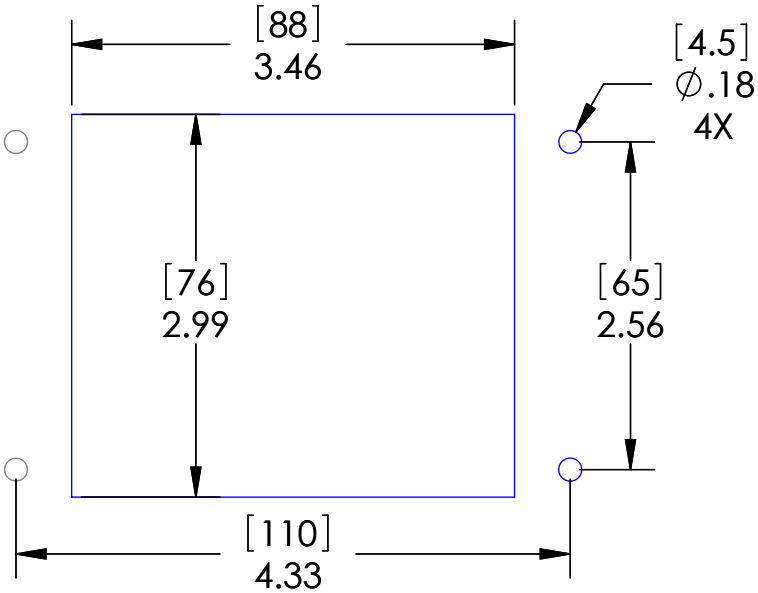

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
ALL D-SUBS	FEMALE	MALE
RJ11	JACK	JACK

HOUSING MATERIALS		PIC RATINGS/SPECIFICATIONS	
BODY:	EPOXY COATED DIE CAST ALUMINUM	VOLTS:	125V
GASKET:	THERMOPLASTIC ELASTOMER	AMPS:	15A
HANDLE:	POLYAMIDE	SCCR:	10kA
LEVERS:	STAINLESS STEEL	NEMA/UL EN 60529:	4, 4X, 12 IP65
OPERATING TEMPERATURE: (0°C / +66° C (+32° F / +150° F))		MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT P/N: D-PIC-MT		MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
		INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		WIRE STRIP LENGTH:	10 ~ 11 mm
		DRAWN BY	DCG
MATERIAL		DRAWN DATE	07/14/2021
		CHECKED BY	DCG
FINISH		CHECK DATE	07/14/2021
		COMMENTS:	
DO NOT SCALE DRAWING		MENCOM CORPORATION	
		TITLE: CC; GFI; DB25; RJ11; 32	
SIZE		DWG. NO.	REV
		B GF-DB25-RJ11-32	D
SCALE: 2:3		WEIGHT:	SHEET 1 OF 1