
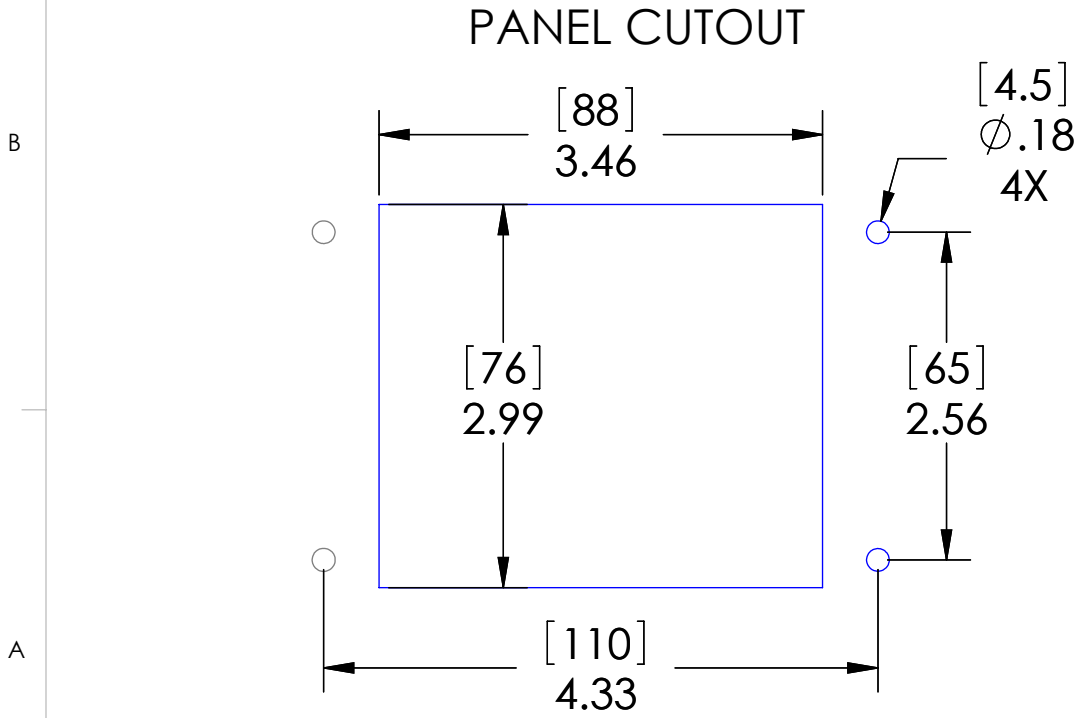


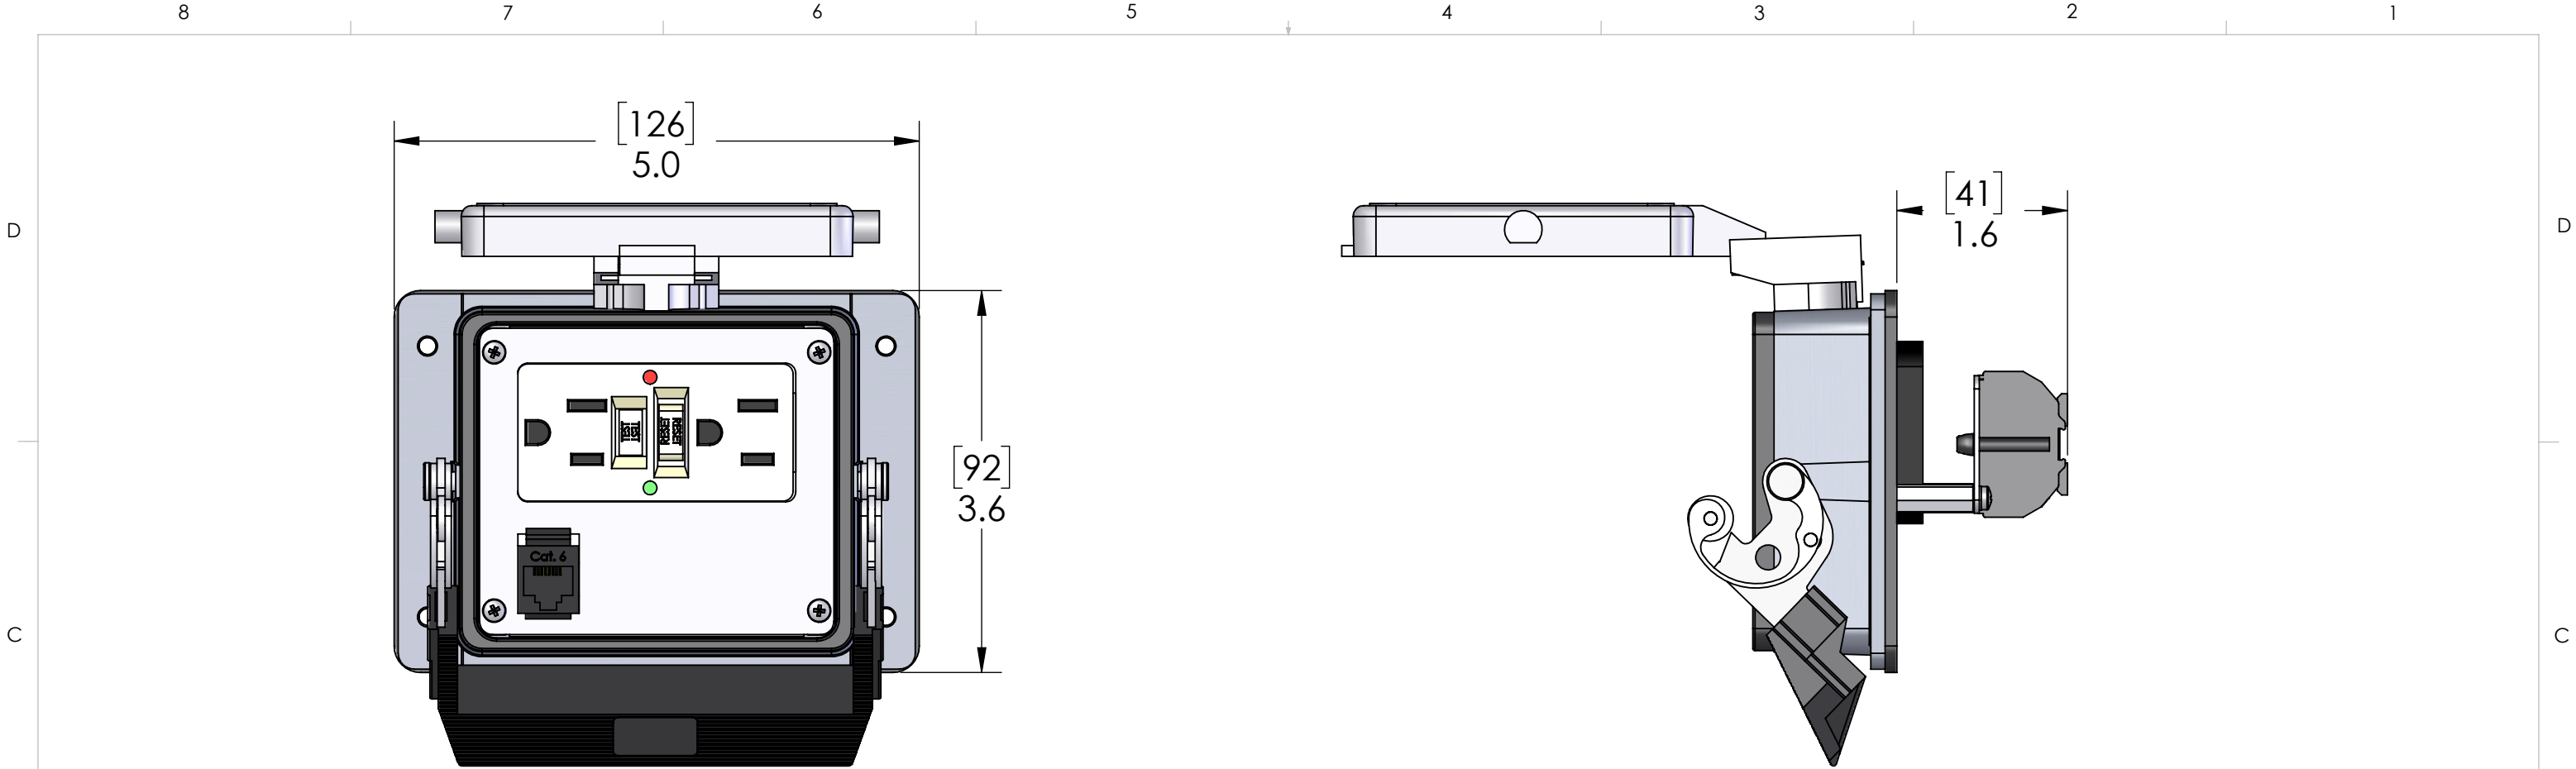

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

		HOUSING MATERIALS		AMPS:		15A			
BODY:		EPOXY COATED DIE CAST ALUMINUM		SCCR:		10kA			
GASKET:		THERMOPLASTIC ELASTOMER		NEMA/UL EN 60529:		4, 12 IP65			
HANDLE:		POLYAMIDE		PANEL THICKNESS:		5.0mm max			
LEVERS:		STAINLESS STEEL		MOUNTING SCREW TORQUE:		0.8N-m			
OPERATING TEMPERATURE		- 35 ° to +66 ° C (- 30 ° to + 150 ° F)		TERMINAL BLOCK TORQUE:		0.5N-m			
HUMIDITY		95%		INCOMING POWER WIRE SIZE:		0.25 - 2.5 sq mm / 24-12AWG			
				WIRE STRIP LENGTH:		7 - 8 mm			
MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT P/N: D-PIC-MT				UNLESS OTHERWISE SPECIFIED:		MENCOM CORPORATION			
				DIMENSIONS ARE IN INCHES AND [MM]					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.				MATERIAL		TITLE: GFI; RJ45; 32			
		FINISH		COMMENTS:		SIZE			
						DWG. NO.			
						REV			
						SCALE: 2:3			
						WEIGHT:			
						SHEET 1 OF 1			