


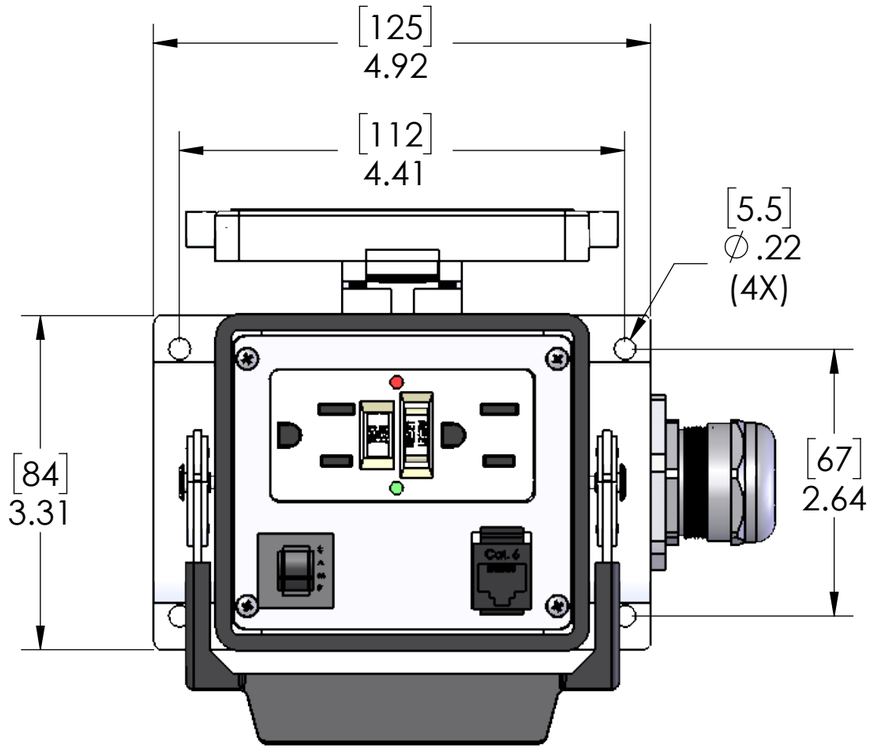


These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided.

| PIC RATINGS/SPECIFICATIONS | |
|---|---|
| VOLTS: | 125V |
| AMPS: | 3A |
| SCCR: | 0.2kA |
| NEMA/UL \| EN 60529: | 4, 4X, 12 \| IP65 |
| MOUNTING SCREW SIZE: | M5 (10-32) (304 or 316SS for 4X) |
| MOUNTING SCREW TORQUE: | 1.2~1.8N-m (0.9~1.3 Lb-Ft) |
| INCOMING POWER WIRE SIZE: | 0.5 ~ 4.0 sq mm / 20-12AWG |

| HOUSING MATERIALS | |
|---|---|
| BODY: | EPOXY COATED DIE CAST ALUMINUM |
| GASKET: | THERMOPLASTIC ELASTOMER |
| HANDLE: | POLYAMIDE |
| LEVERS: | STAINLESS STEEL |

| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED | | |
|---|---|---|
| CONN. TYPE | EXTERIOR | INTERIOR |
| RJ45 | CAT. 6 JACK | CAT. 6 JACK |

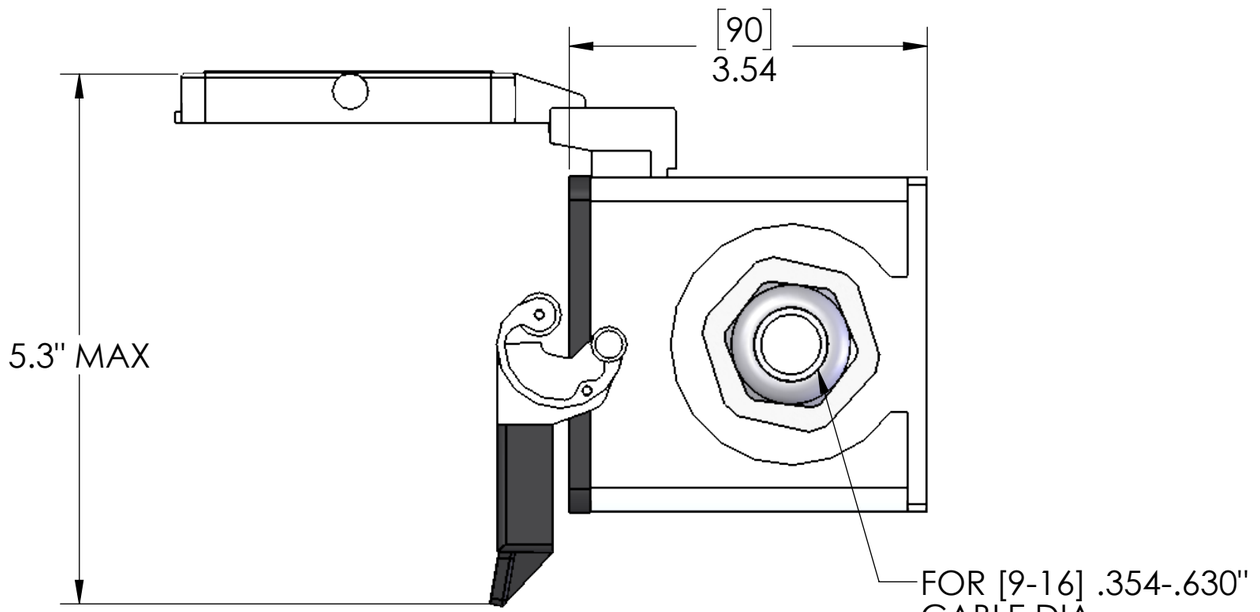MOUNTING KIT ORDERED SEPARATELY CONTAINS M5x0.8 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M5 NUT
**P/N: D-PIC-MT-M5**

c UL us LISTED ENCL. ACC. 5JR2

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | DG |
| DRAWN DATE | 11/21/2018 |
| CHECKED BY | GO |
| CHECK DATE | 11/26/2018 |

COMMENTS:

MENCOM CORPORATION

TITLE:
GFC; RJ45; 3A; SFC MNT 32

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | GF-RJ45-R-P32 | D |

SCALE: 2:3 | WEIGHT: | SHEET 1 OF 1