


-FEMALE USB  
TYPE A

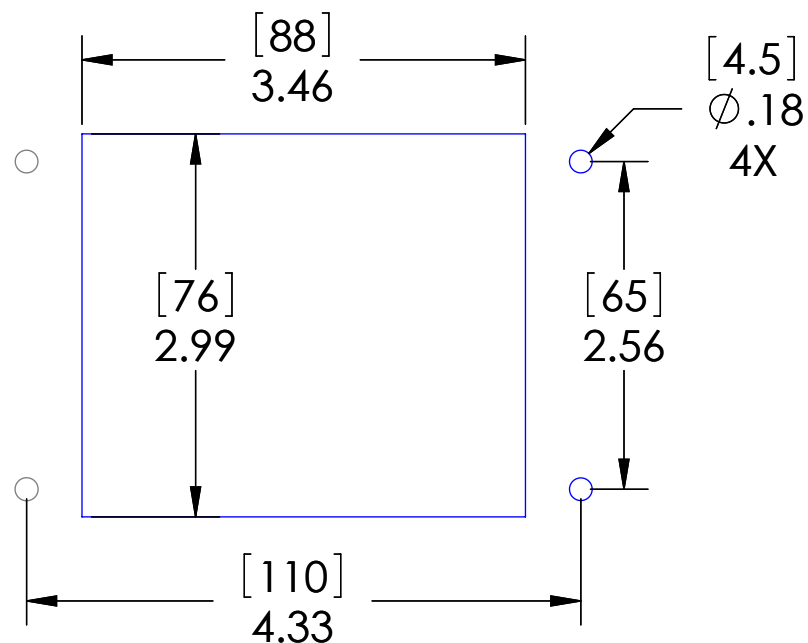

PART NUMBER	LENGTH "L"
GF-RJ45-USB-03-32	3 FEET
GF-RJ45-USB-06-32	6 FEET
GF-RJ45-USB-10-32	10 FEET

	HOUSING MATERIALS	VOLTS:	120V
BODY:	EPOXY COATED DIE CAST	AMPS:	15A
	ALUMINUM	SCCR:	10kA
GASKET:	THERMOPLASTIC ELASTOMER	NEMA/UL   EN 60529:	4, 4X, 12   IP65
HANDLE:	POLYAMIDE	MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
LEVERS:	STAINLESS STEEL	MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
		INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
TEMPERATURE:	(-10°C / +60° C (+14° F / +140° F ))	WIRE STRIP LENGTH:	10 ~ 11 mm

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F ))

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**



UNLESS OTHERWISE SPECIFIED:

**S** DIMENSIONS ARE IN INCHES  
AND [MM]

	MATERIAL
--	----------

	FINISH
--	--------

DO NOT SCALE DRAWING

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		MATERIAL
		FINISH
		DO NOT SCALE DRAWING

DRAWN BY	DCG
DRAWN DATE	08/02/2021
CHECKED BY	DCG
CHECK DATE	08/02/2021

COMMENTS:

MENCOM CORPORATION

TITLE:

GFI; RJ45; USB-PCBL; 32

SIZE <b>B</b>	DWG. NO. <b>GF-RJ45-USB-ZZ-32</b>	REV <b>E</b>
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1