

8		7	
WIRING			
COLOR		FUNCTION	
WHITE		L1 (ALL PIN 1)	
GREEN/YELLOW		GND (ALL PIN 3)	
RED		PORT 1/PIN 2	
ORANGE		PORT 2/PIN 2	
BLACK		PORT 3/PIN 2	
BLUE		PORT 4/PIN 2	
WHITE/BLACK		PORT 5/PIN 2	
RED/BLACK		PORT 6/PIN 2	

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	1/25/2007	

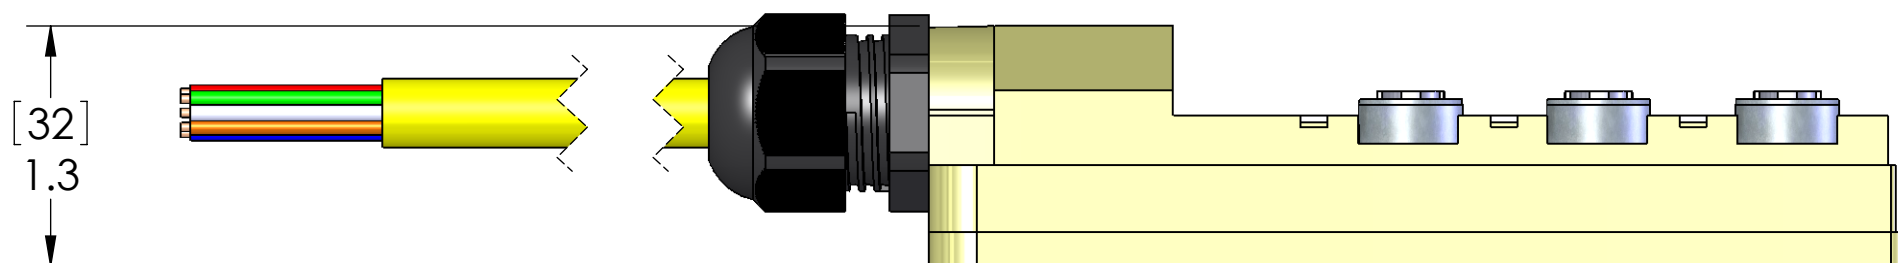
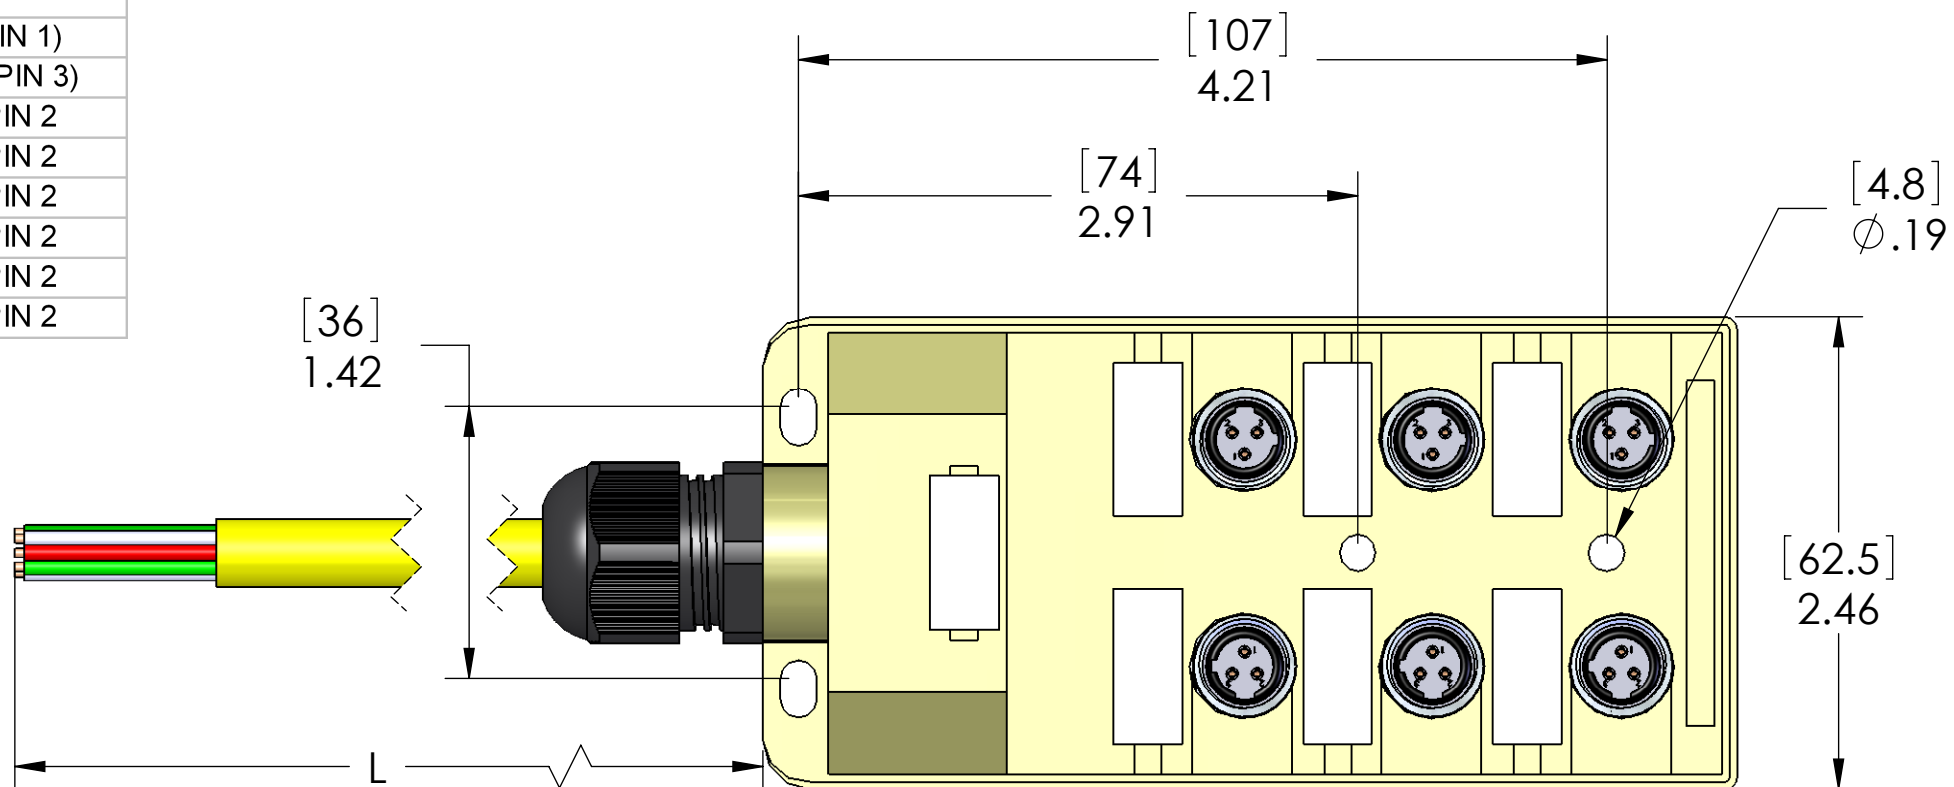


TABLE A	
	L
JAC-630-008-C010	40"
JAC-630-008-C020	79"
JAC-630-008-C030	118"
JAC-630-008-C040	157"
JAC-630-008-C050	197"
JAC-630-008-C060	236"
JAC-630-008-C080	315"
JAC-630-008-C100	393"
JAC-630-008-C150	590"
JAC-630-008-C200	786"

MATERIALS:	
BODY:	POLYPROPYLENE
INSERTS:	POLYAMIDE
COUPLINGS:	NICKEL PLATED BRASS
O-RING:	NBR
GLAND:	POLYAMIDE
CABLE:	18/8 AWM 2661

150V MAX
3A/PORT, 10A/BLOCK

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION			
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM				TITLE:
			CHECKED					
			ENG APPR.					
			MFG APPR.					
			Q.A.		SIZE DWG. NO. REV B JAC-630-008-CZZ A			
		MATERIAL	COMMENTS:					
		FINISH						
		DO NOT SCALE DRAWING						
			SCALE: 1:1		WEIGHT:		SHEET 1 OF 1	