

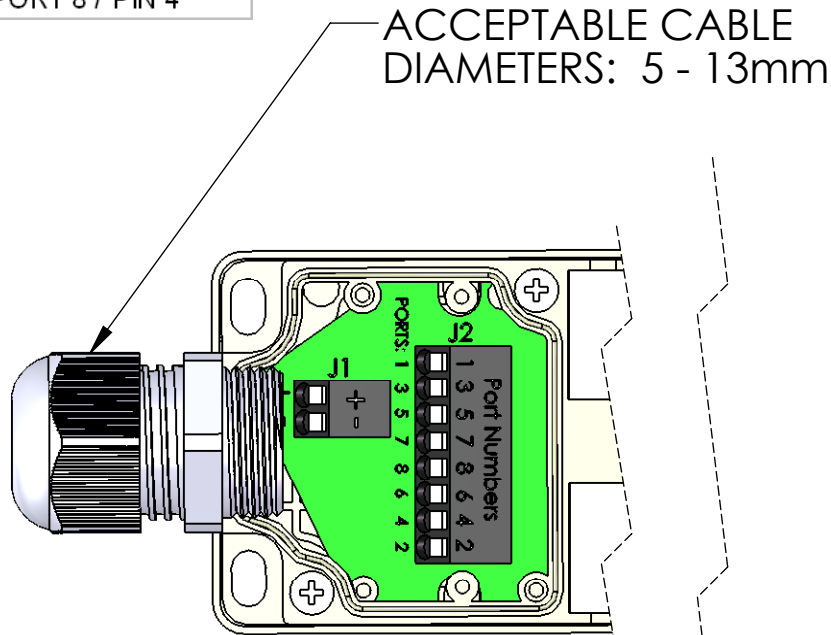


WIRING	
Term Blk	FUNCTION
J1 - +	V+ (ALL PORTS PIN 1)
J1 - -	V- (ALL PORTS PIN 3)
J2 - 1	PORT 1 / PIN 4
J2 - 2	PORT 2 / PIN 4
J2 - 3	PORT 3 / PIN 4
J2 - 4	PORT 4 / PIN 4
J2 - 5	PORT 5 / PIN 4
J2 - 6	PORT 6 / PIN 4
J2 - 7	PORT 7 / PIN 4
J2 - 8	PORT 8 / PIN 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/20/2009	

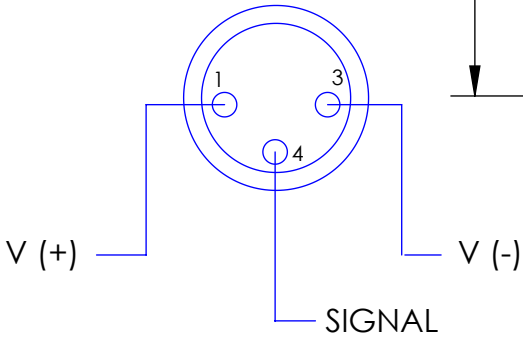

CONNECTIONS MADE
VIA SPRING CLAMP
TERMINAL BLOCKS

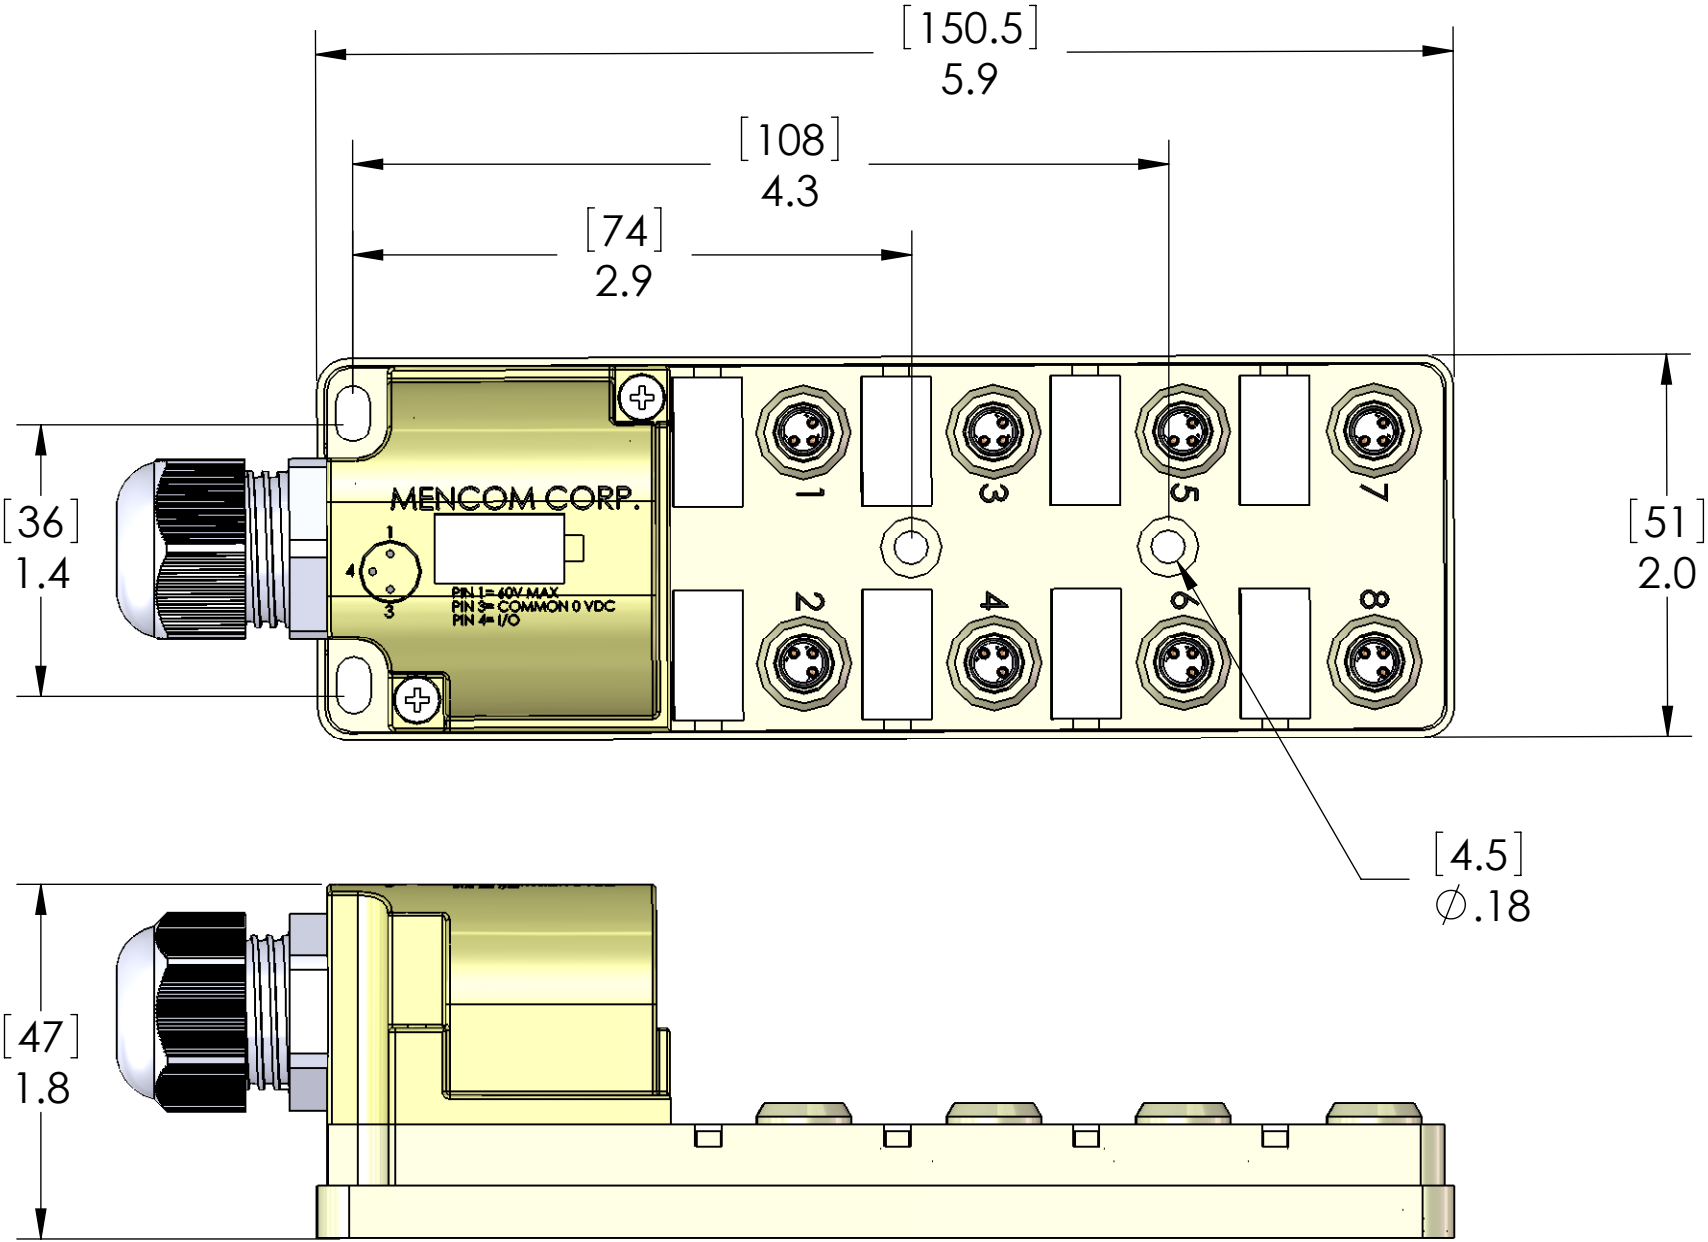

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	60VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]		DWM		
		DRAWN		
		CHECKED		
		ENG APPR.		
		MFG APPR.	TITLE:	
		Q.A.		
		COMMENTS:		
MATERIAL		SIZE		REV
FINISH		DWG. NO.		A
DO NOT SCALE DRAWING		SCALE: 1:1		SHEET 1 OF 1
		WEIGHT:		