

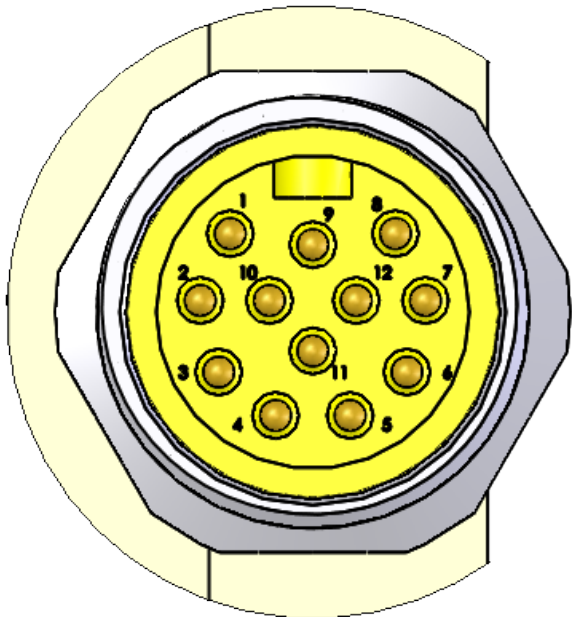
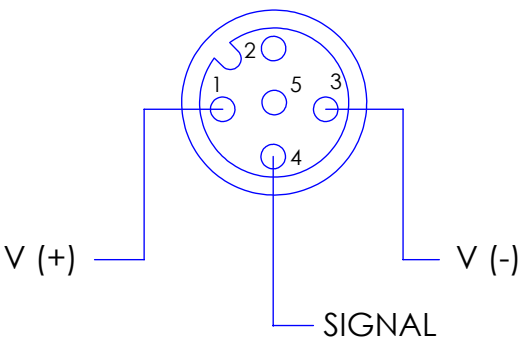


WIRING		
MIN-12	PORT/PIN	FUNCTION
10	ALL PORTS / PIN 1	V+
9	ALL PORTS / PIN 3	V-
1	PORT 1 / PIN 4	I/O
2	PORT 2 / PIN 4	I/O
3	PORT 3 / PIN 4	I/O
4	PORT 4 / PIN 4	I/O
5	PORT 5 / PIN 4	I/O
6	PORT 6 / PIN 4	I/O
7	PORT 7 / PIN 4	I/O
8	PORT 8 / PIN 4	I/O
11	PORT 9 / PIN 4	I/O
12	PORT 10 / PIN 4	I/O

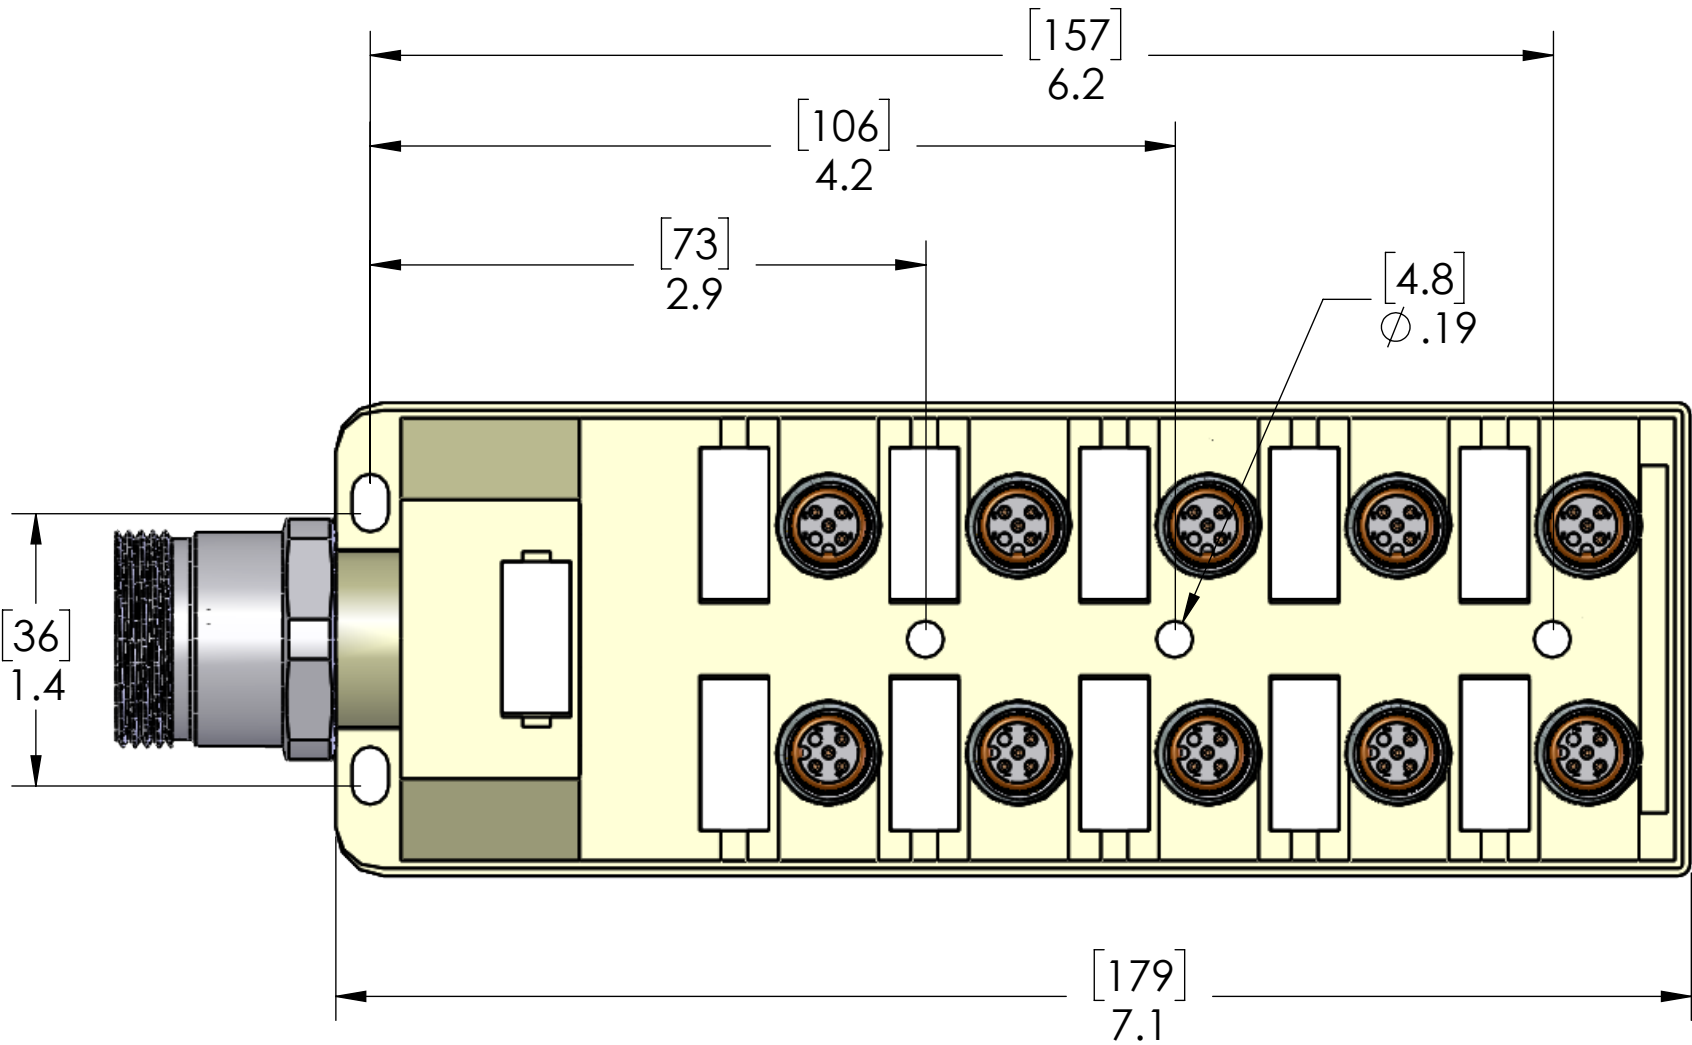

DETAIL B
SCALE 2 : 1

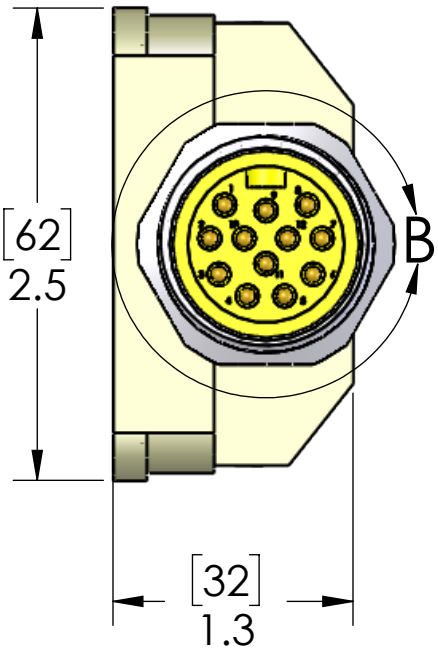

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	150V MAX
AMPS:	3A PER PORT, 8A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH
	DRAWN DATE	04/06/2018
	CHECKED BY	
	CHECK DATE	
MATERIAL FINISH DO NOT SCALE DRAWING	COMMENTS:	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	JDC-030-012-M000	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1