
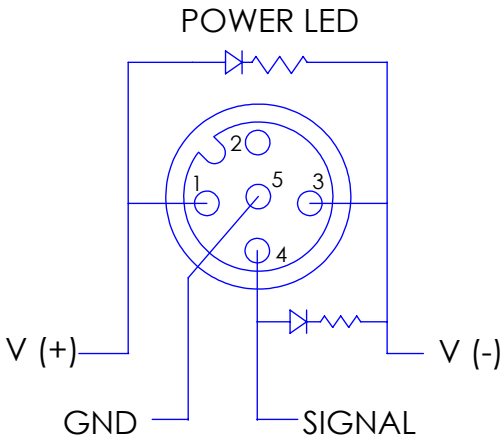


WIRING		
MCV	PORT/PIN	FUNCTION
19	ALL PORTS PIN 1	V+
12	ALL PORTS PIN 5	GND
6	ALLPORTS PIN 3	V-
15	PORT 1 / PIN 4	I/O
5	PORT 2 / PIN 4	I/O
16	PORT 3 / PIN 4	I/O
3	PORT 4 / PIN 4	I/O
17	PORT 5 / PIN 4	I/O
2	PORT 6 / PIN 4	I/O
11	PORT 7 / PIN 4	I/O
1	PORT 8 / PIN 4	I/O
7	PORT 9 / PIN 4	I/O
4	PORT 10 / PIN 4	I/O

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	4/27/2009	

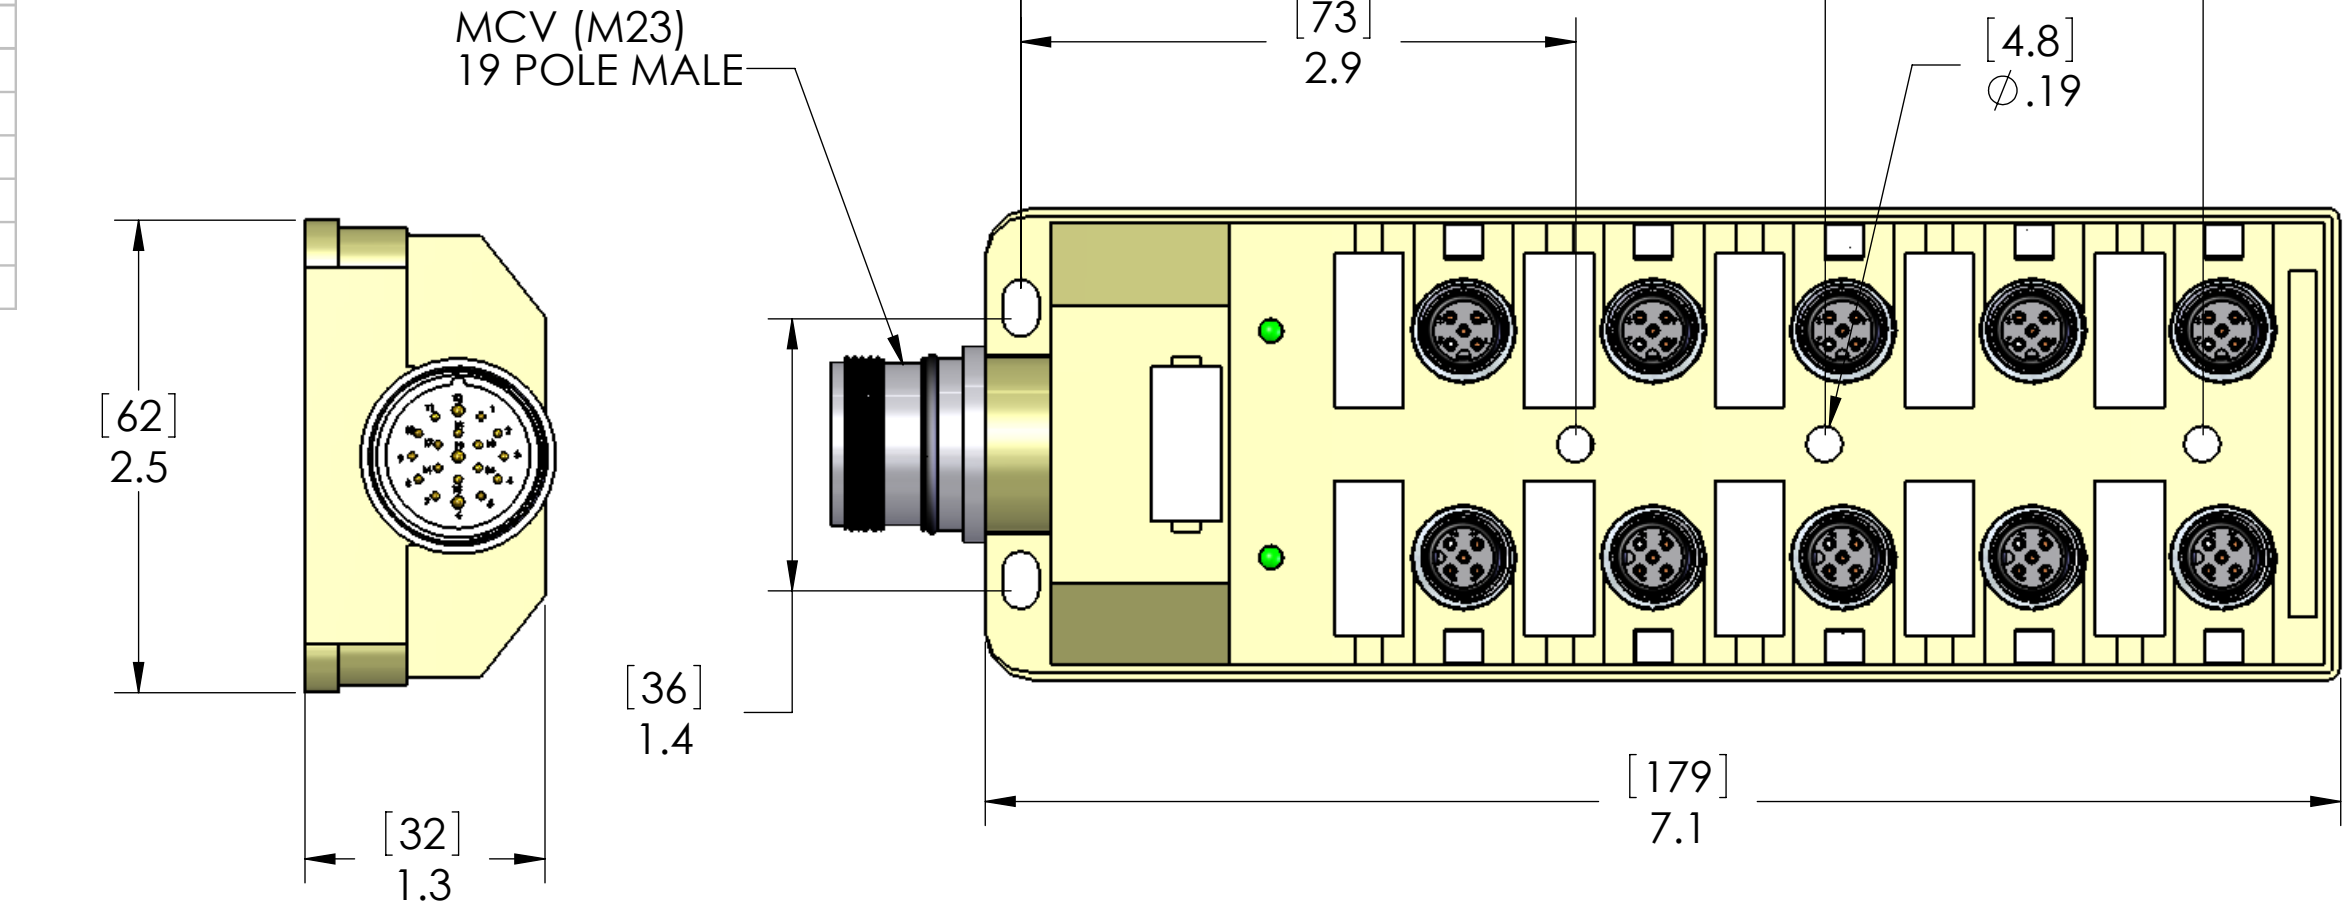

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES		DRAWN	BEM	TITLE:
TOLERANCES:		CHECKED		
FRACTIONAL $\pm 1/64$		ENG APPR.		
ANGULAR: MACH $\pm 5^\circ$ BEND $\pm 5^\circ$		MFG APPR.		
TWO PLACE DECIMAL $\pm .01$		Q.A.		SIZE DWG. NO.
THREE PLACE DECIMAL $\pm .004$		COMMENTS:		
MATERIAL		SCALE: 1:1		REV
FINISH		WEIGHT:		A
DO NOT SCALE DRAWING		SHEET 1 OF 1		