
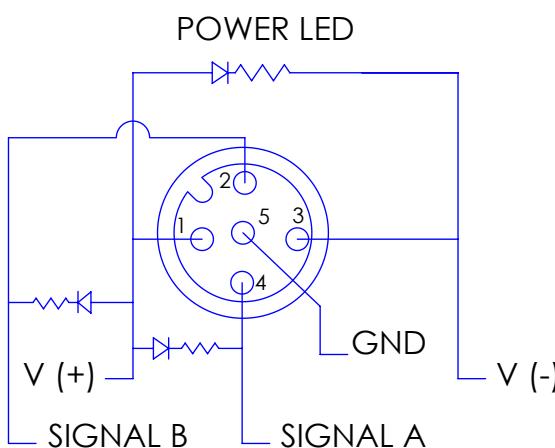
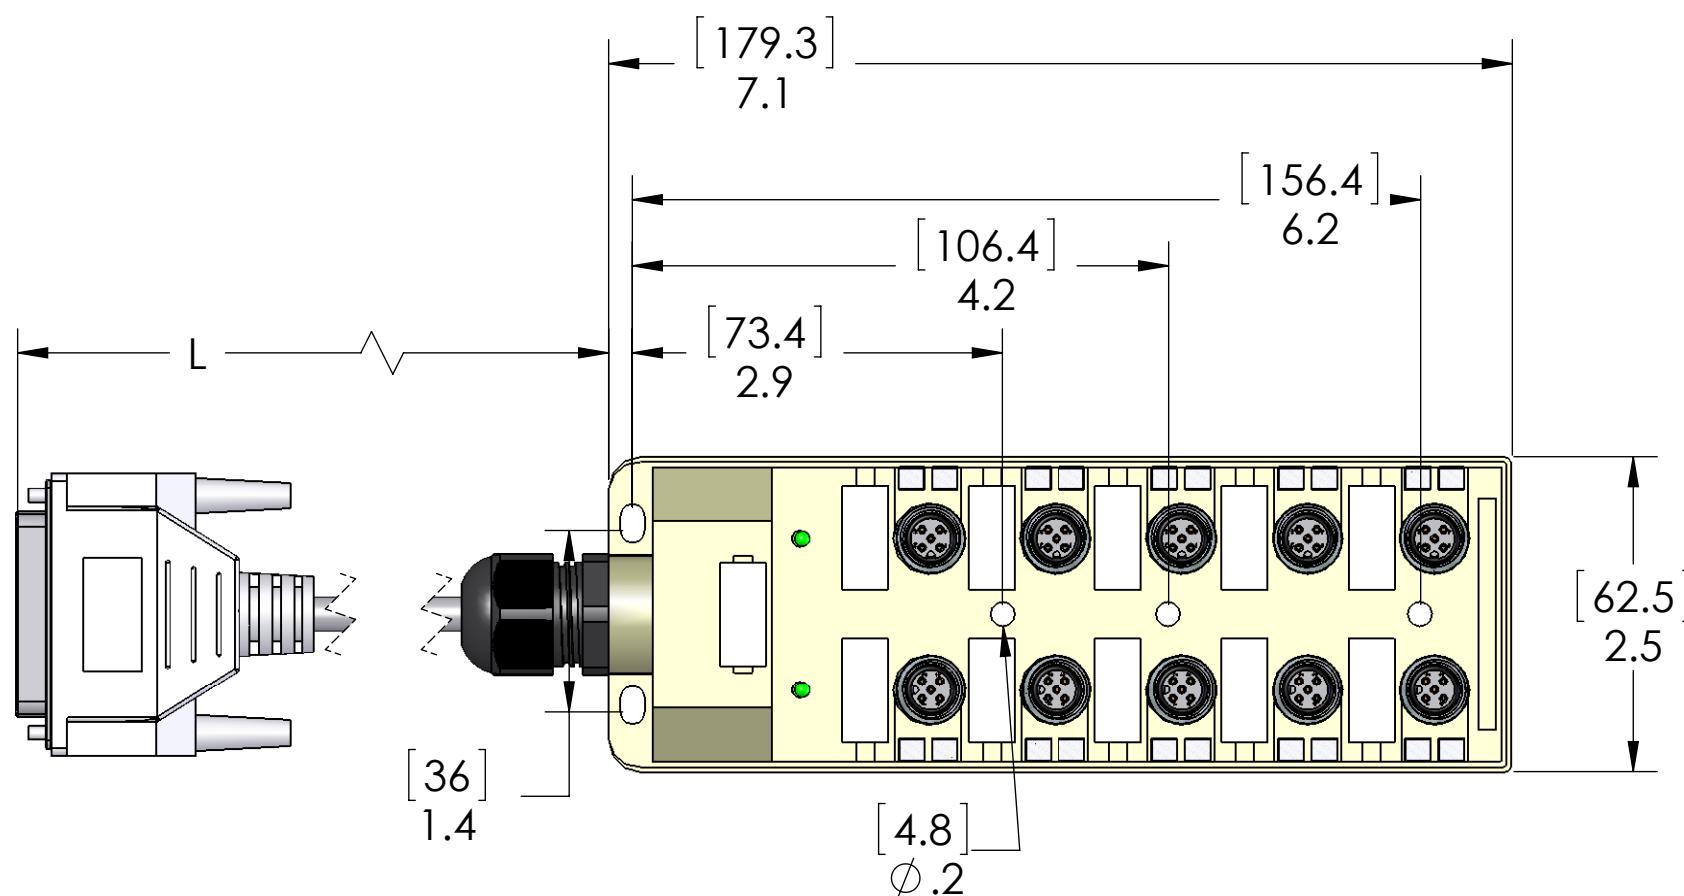


P/N	L
JDC-05N-225-D003	12" [0.3m]
JDC-05N-225-D010	39" [1m]
JDC-05N-225-D020	79" [2m]
JDC-05N-225-D030	118" [3m]
JDC-05N-225-D040	157" [4m]
JDC-05N-225-D050	197" [5m]
JDC-05N-225-D060	236" [6m]
JDC-05N-225-D080	315" [8m]
JDC-05N-225-D100	393" [10m]

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	11/2/2011	BEM

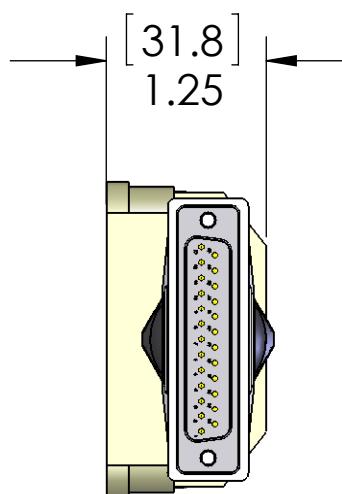

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

MATERIALS	
CABLE GLAND:	POLYAMIDE
CABLE:	20/4, 24/21 SHIELDED PVC JACKETED
CONTACTS:	GOLD PLATED COPPER ALLOY
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
O-RINGS:	NBR
RATINGS:	
AMPERAGE:	2A PER PORT, 8A PER BLOCK
VOLTAGE:	10 - 48VDC
SEAL RATING:	IP67 BLOCK, IP40 DB25

		UNLESS OTHERWISE SPECIFIED:	
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN
			CHECKED
			ENG APPR.
			MFG APPR.
			Q.A.
		MATERIAL	COMMENT
		FINISH	
		DO NOT SCALE DRAWING	

## MENCOM CORPORATION

## TITLE:

DWG. NO.		REV
JDC-05N-225-DZZ		A
: 2:3	WEIGHT:	SHEET 1 OF 1