



8		7
WIRING		
WIRE COLOR	FUNCTION	PORT/PIN
BROWN	V +	ALL PORTS PIN 1
BROWN/WHITE	V +	ALL PORTS PIN 1
BLUE	V -	ALL PORTS PIN 3
GREEN/YELLOW	GND	ALL PORTS PIN 5
WHITE	I / O	PORT 1 / PIN 4
GREEN	I / O	PORT 2 / PIN 4
YELLOW	I / O	PORT 3 / PIN 4
GRAY	I / O	PORT 4 / PIN 4
PINK	I / O	PORT 5 / PIN 4
RED	I / O	PORT 6 / PIN 4
BLACK	I / O	PORT 7 / PIN 4
VIOLET	I / O	PORT 8 / PIN 4
GRAY/PINK	I / O	PORT 9 / PIN 4
RED/BLUE	I / O	PORT 10 / PIN 4
WHITE/GREEN	I / O	PORT 11 / PIN 4
BROWN/GREEN	I / O	PORT 12 / PIN 4

3		2		1	
REVISIONS					
REV.	DESCRIPTION			DATE	APPROVED
A	REDRAWN IN SW			11/29/2006	

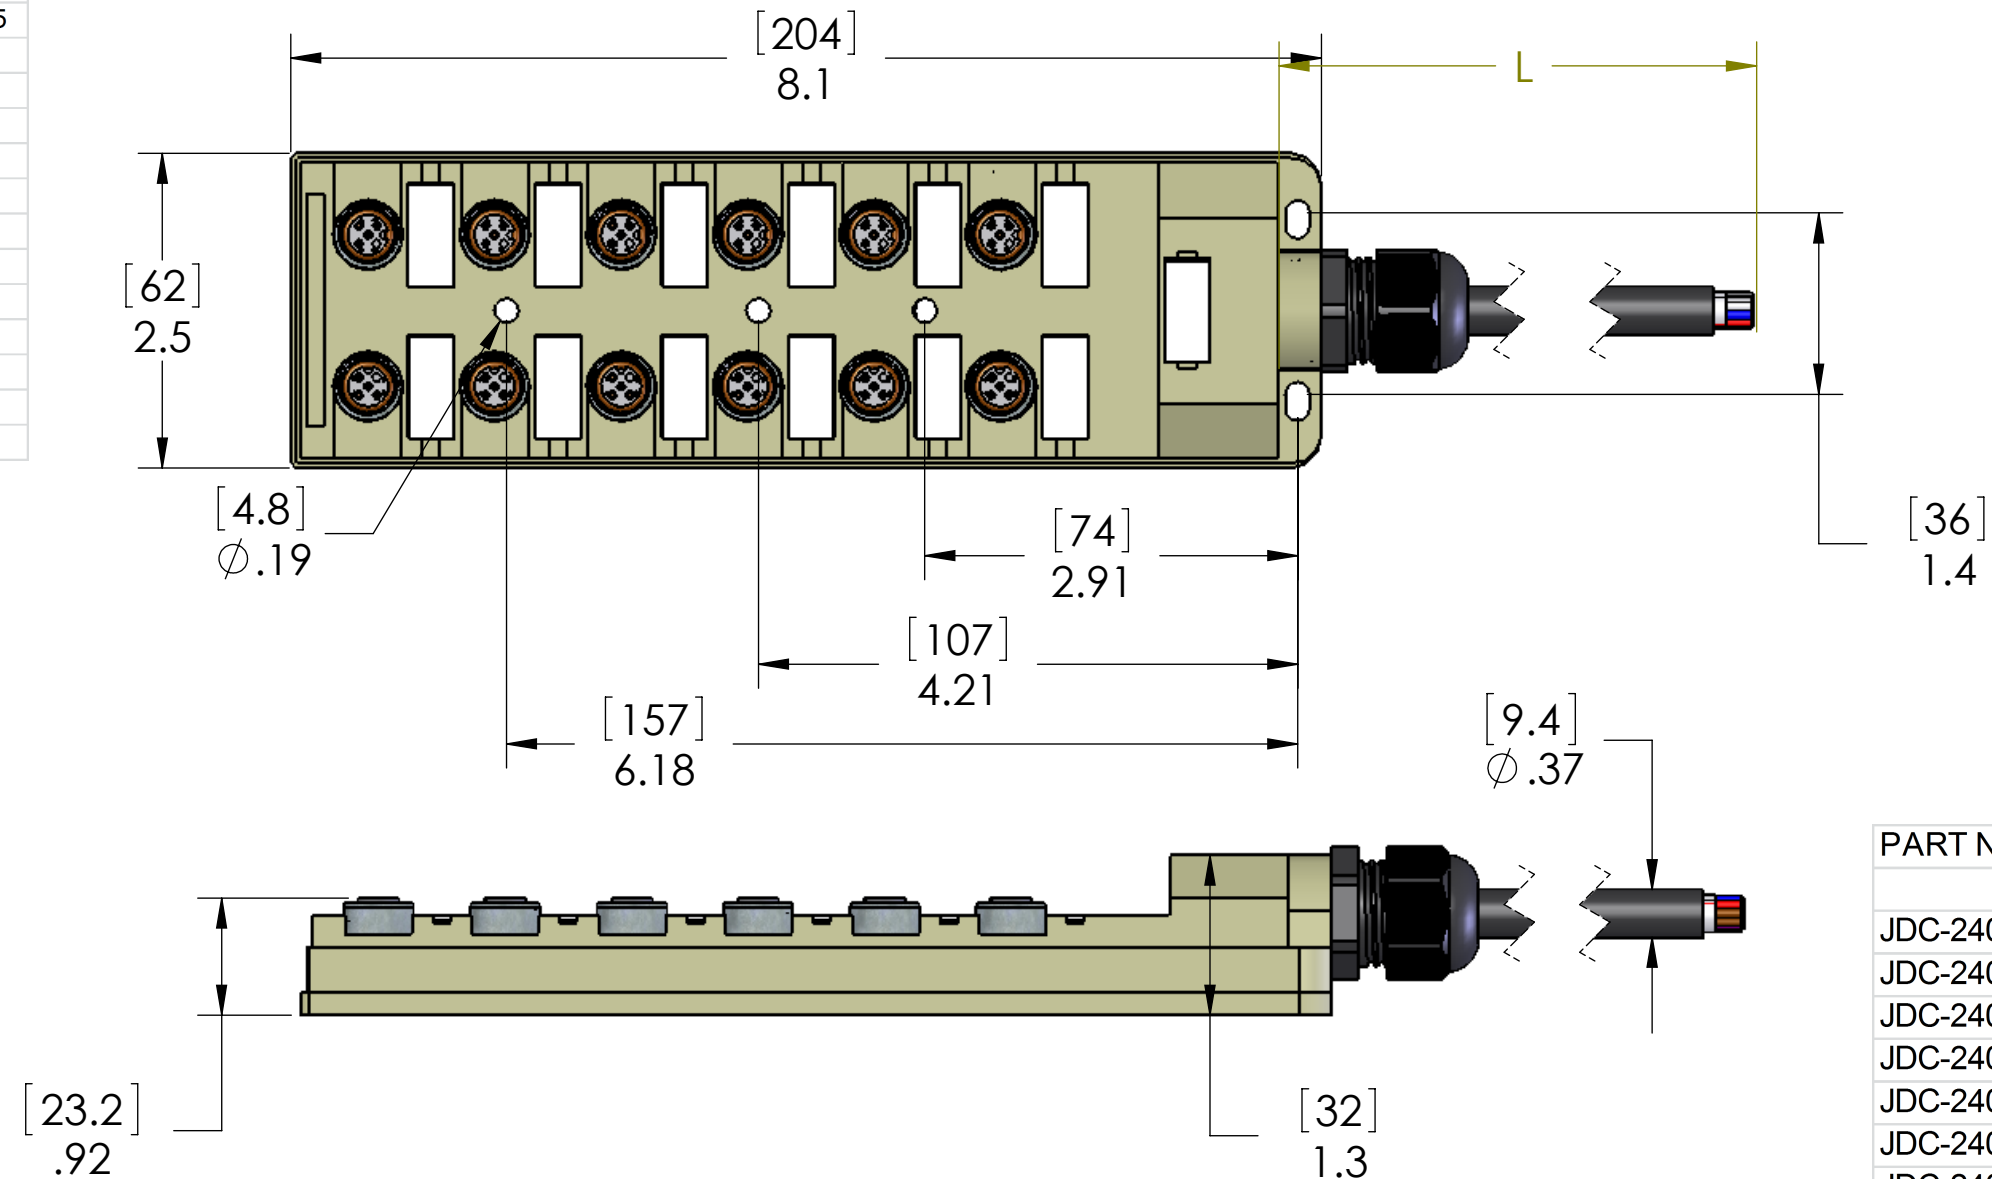

PART NUMBER	L
JDC-240-016-C010	40" [1M]
JDC-240-016-C020	78" [2M]
JDC-240-016-C030	118" [3M]
JDC-240-016-C040	157" [4M]
JDC-240-016-C050	197" [5M]
JDC-240-016-C060	236" [6M]
JDC-240-016-C080	315" [8M]
JDC-240-016-C100	393" [10M]
JDC-240-016-C150	590" [15M]
JDC-240-016-C200	786" [20M]

MATERIALS:	
BODY:	PE
COUPLINGS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/4, 22/12 BLACK PUR JACKET
RATINGS:	
VOLTAGE:	150V MAX
AMPERAGE:	3A PER PORT, 8A PER BLOCK

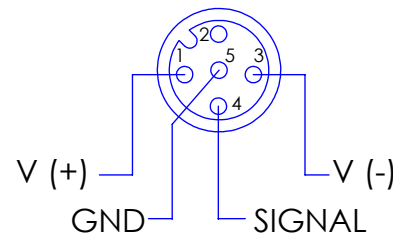

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM			
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.				
			COMMENTS:		SIZE	DWG. NO.	REV
		MATERIAL			B	JDC-240-016-CZZ	A
		FINISH					
		DO NOT SCALE DRAWING			SCALE: 2:3	WEIGHT:	SHEET 1 OF 1