


WIRING	
PORT/PIN (FUNCTION)	MCV PIN #
+	19
GND	12
-	6
1 / 4	15
2 / 4	5
3 / 4	16
4 / 4	3
5 / 4	17
6 / 4	2
7 / 4	11
8 / 4	1
9 / 4	7
10 / 4	4
11 / 4	8
12 / 4	14

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	1/2/2007	

MCV
CONNECTOR
(ORIENTATION
OF KEYWAY
IS RANDOM)

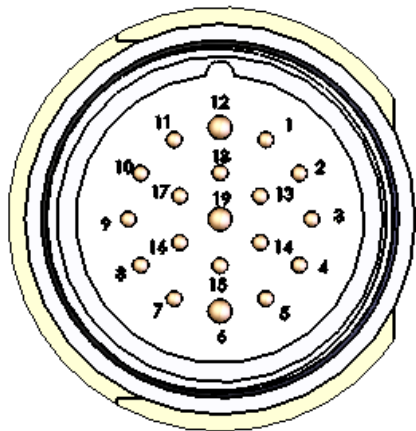

DETAIL A
SCALE 2 : 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
			CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
			COMMENTS:	
		MATERIAL		
		FINISH		
		DO NOT SCALE DRAWING		

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	120V MAX
AMPS:	4A PER PORT, 12A PER BLOCK

MENCOM CORPORATION

TITLE:			
SIZE	DWG. NO.	REV	
B	JDC-240-019-V000	A	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	