


8		7
WIRING		
WIRE COLOR	PORT/PIN	FUNCTION
BROWN	ALL PORTS PIN 1	V+
BLUE	ALL PORTS PIN 3	V-
GREEN/YELLOW	ALL PORTS PIN 5	GND
WHITE	PORT 1 / PIN 4	I/O
GREEN	PORT 2 / PIN 4	I/O
YELLOW	PORT 3 / PIN 4	I/O
GRAY	PORT 4 / PIN 4	I/O
PINK	PORT 5 / PIN 4	I/O
RED	PORT 6 / PIN 4	I/O
BLACK	PORT 7 / PIN 4	I/O
VIOLET	PORT 8 / PIN 4	I/O
GRAY/PINK	PORT 9 / PIN 4	I/O
RED/BLUE	PORT 10 / PIN 4	I/O
WHITE/GREEN	PORT 11 / PIN 4	I/O
BROWN/GREEN	PORT 12 / PIN 4	I/O


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	11/29/2006	
B	REMOVE UNUSED WIRE	4/10/2012	JJH

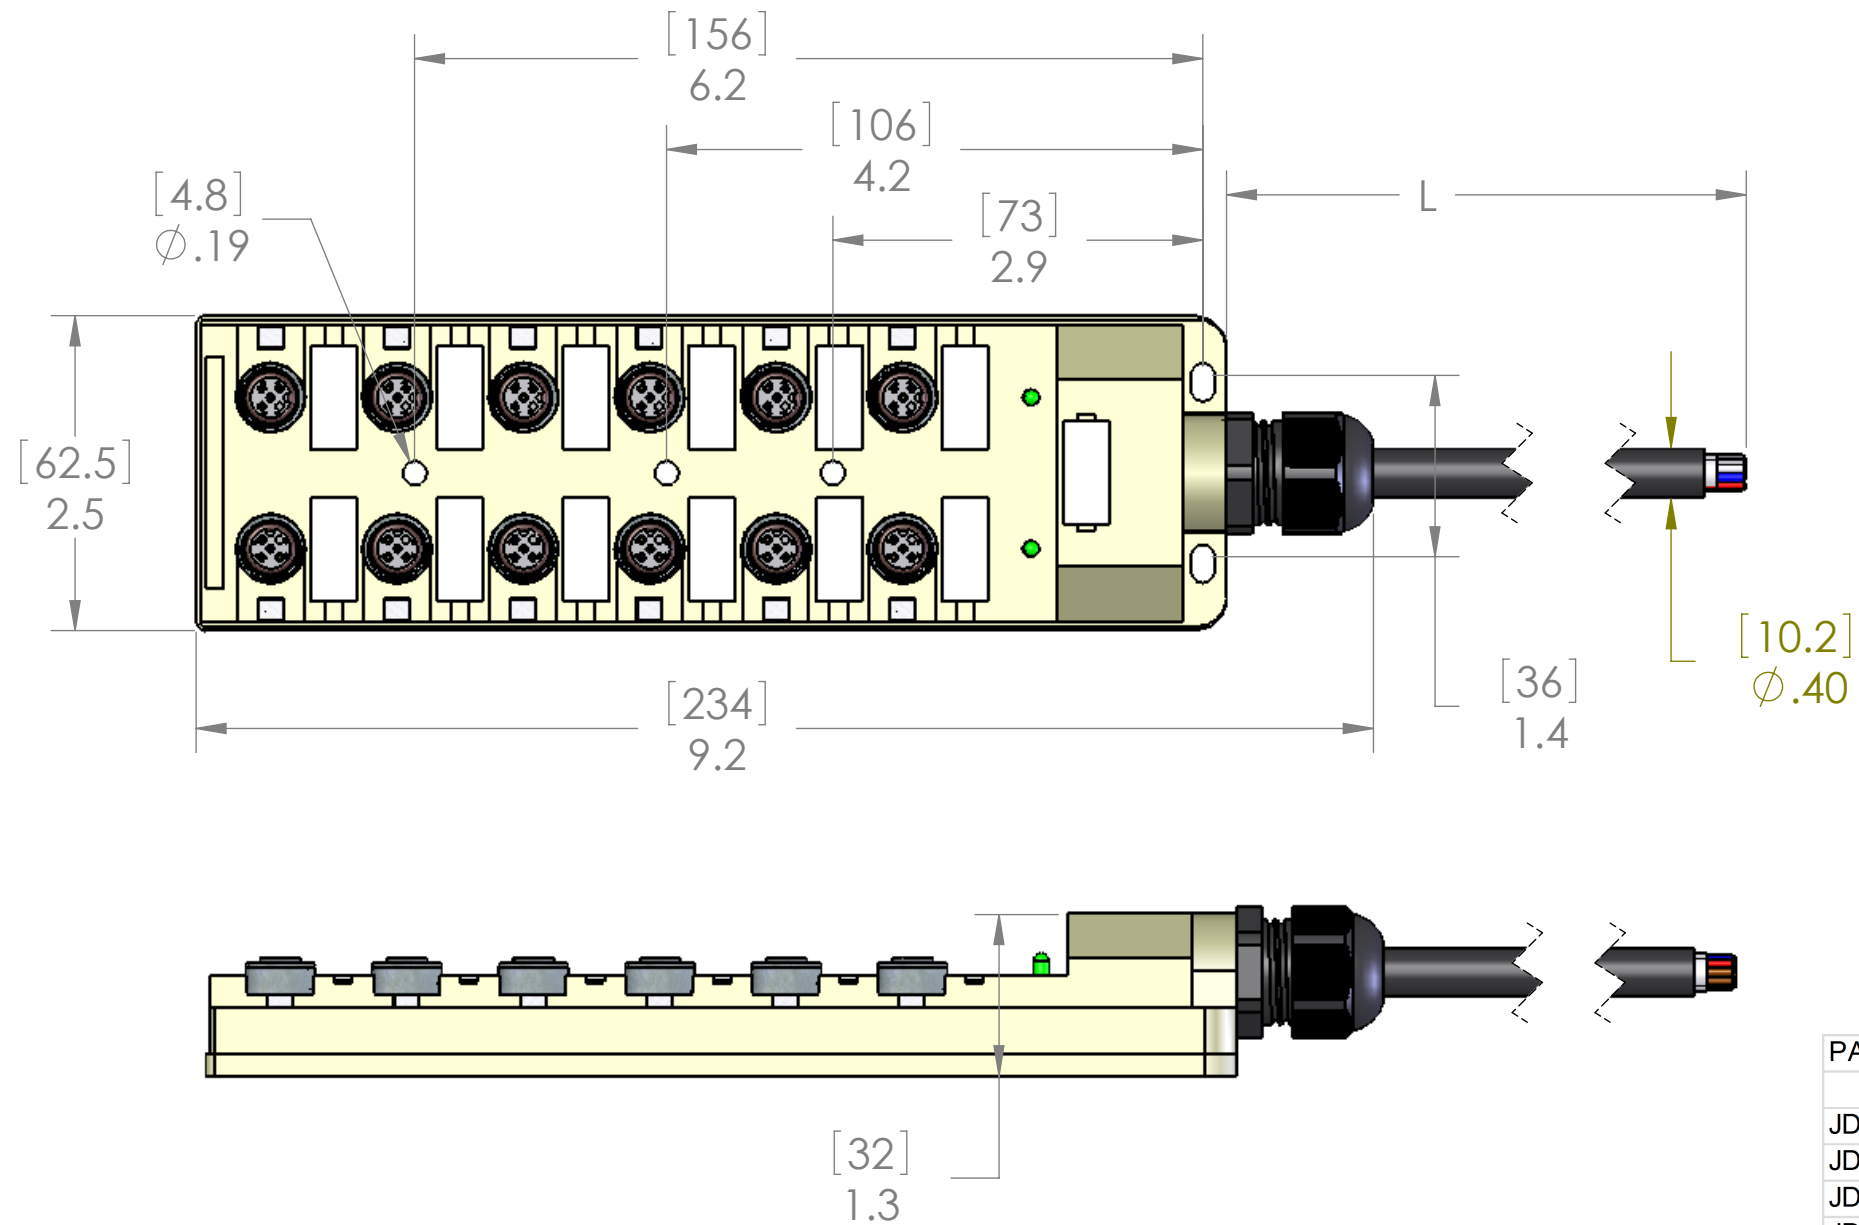

PART NUMBER	L
JDC-24P-216-C010	40" [1M]
JDC-24P-216-C020	78" [2M]
JDC-24P-216-C030	118" [3M]
JDC-24P-216-C040	157" [4M]
JDC-24P-216-C050	197" [5M]
JDC-24P-216-C060	236" [6M]
JDC-24P-216-C080	315" [8M]
JDC-24P-216-C100	393" [10M]
JDC-24P-216-C150	590" [15M]
JDC-24P-216-C200	786" [20M]

THIS IS A LIGHTED PNP BLOCK

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

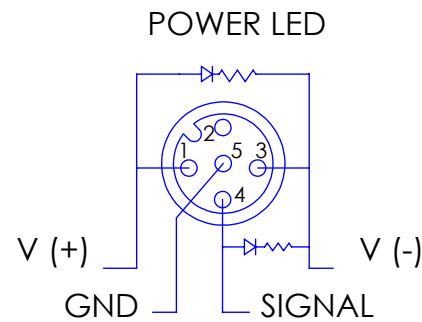

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/64$ ANGULAR: MACH $\pm 5^\circ$ BEND $\pm 5^\circ$ TWO PLACE DECIMAL $\pm .01$ THREE PLACE DECIMAL $\pm .004$	DRAWN	BEM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.		SIZE DWG. NO. REV B JDC-24P-216-CZZ B		
		MATERIAL	COMMENTS:				
		FINISH					
		DO NOT SCALE DRAWING					
					SCALE: 2:3	WEIGHT:	SHEET 1 OF 1