

WIRING	
PORT/PIN (FUNCTION)	MCV PIN #
+	19
GND	12
-	6
1 / 4	15
2 / 4	5
3 / 4	16
4 / 4	3
5 / 4	17
6 / 4	2
7 / 4	11
8 / 4	1
9 / 4	7
10 / 4	4
11 / 4	8
12 / 4	14

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	1/2/2007	

D

C

B

A



D

C


B

A


MCV
CONNECTOR
(ORIENTATION
OF KEYWAY
IS RANDOM)

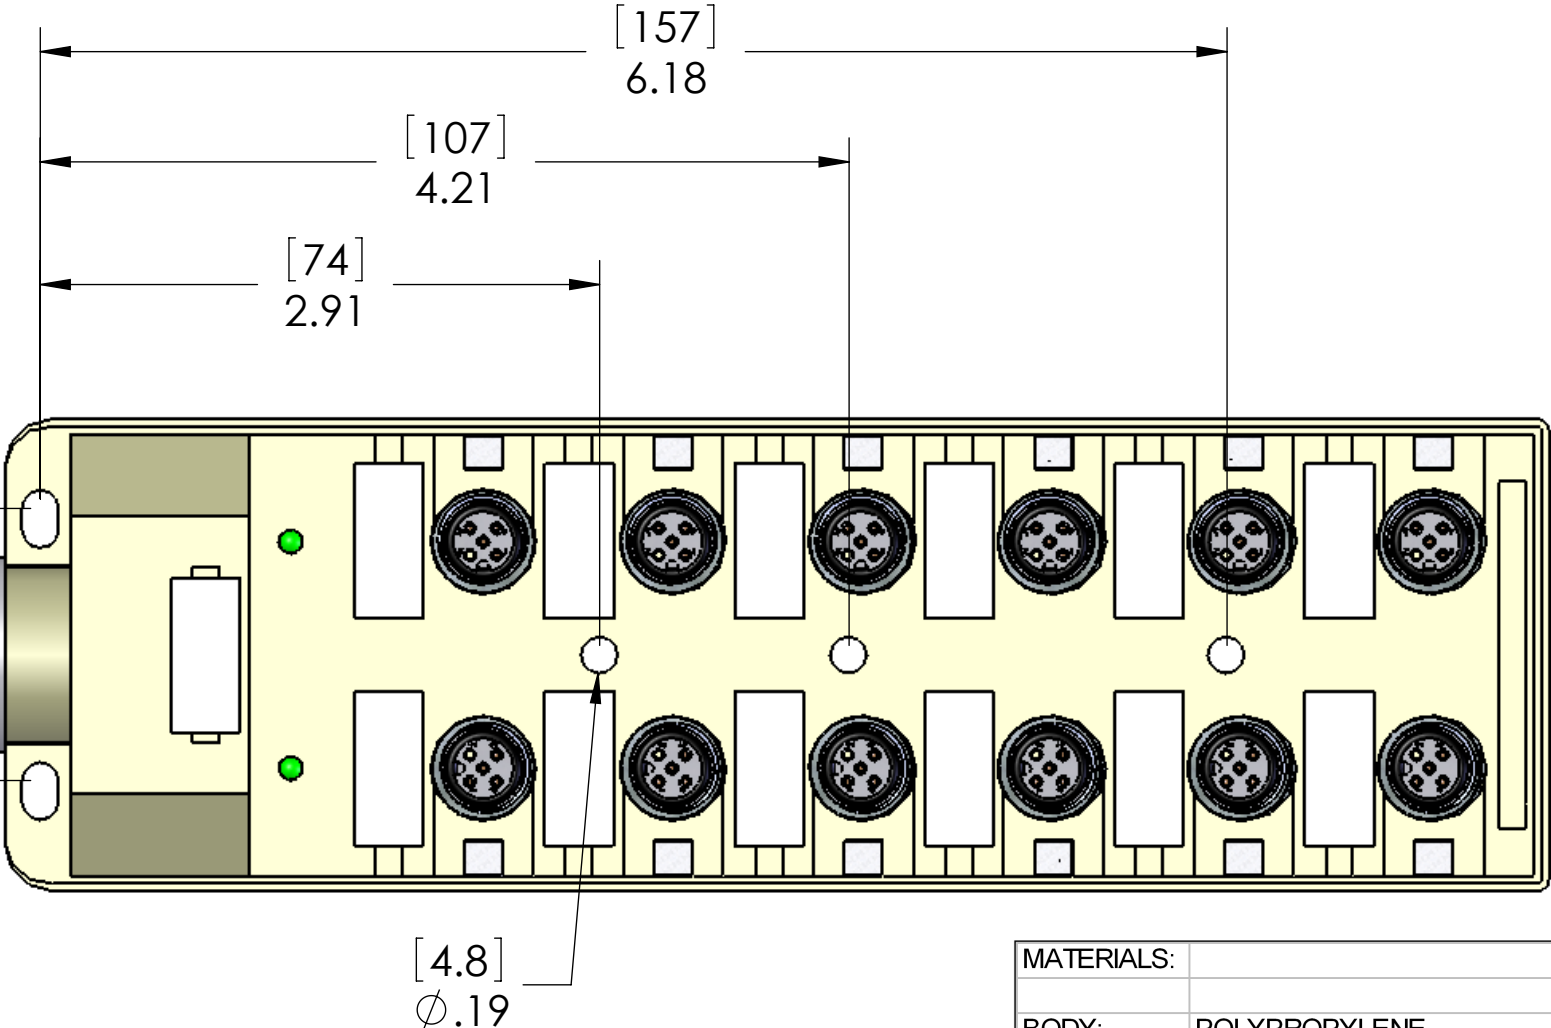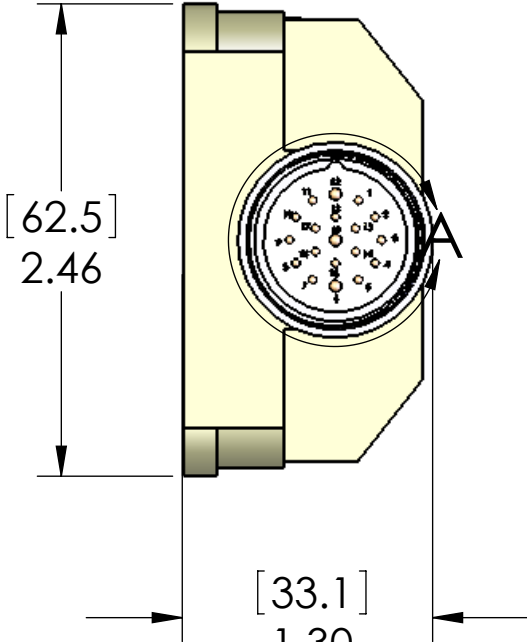

NOTE: THIS BLOCK IS MADE FOR PNP
OUTPUT ONLY.

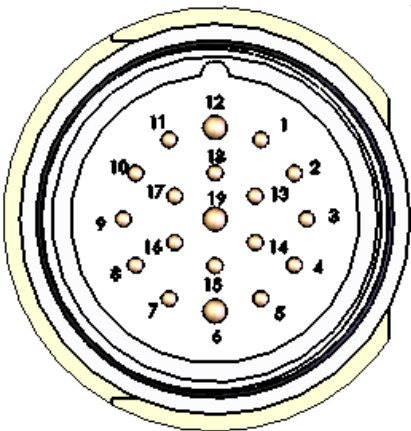

DETAIL A
SCALE 2 : 1

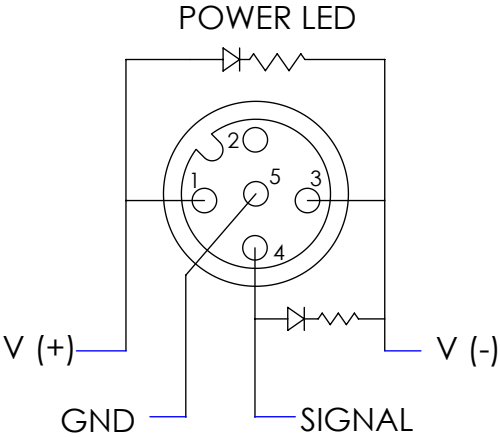

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	30V MAX
AMPS:	4A PER PORT, 12A PER BLOCK

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]		BEM
		DRAWN
		CHECKED
		ENG APPR.
		MFG APPR.
		Q.A.
		COMMENTS:
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	JDC-24P-219-V000	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1