



DB PIN	FUNCTION
22 & 23	V+
24 & 25	V-
SHELL	GROUND
1	PORT 1 PIN 4
2	PORT 2 PIN 4
3	PORT 3 PIN 4
4	PORT 4 PIN 4
5	PORT 5 PIN 4
6	PORT 6 PIN 4
7	PORT 7 PIN 4
8	PORT 8 PIN 4
9	PORT 9 PIN 4
10	PORT 10 PIN 4
11	PORT 11 PIN 4
12	PORT 12 PIN 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	7/1/2010	

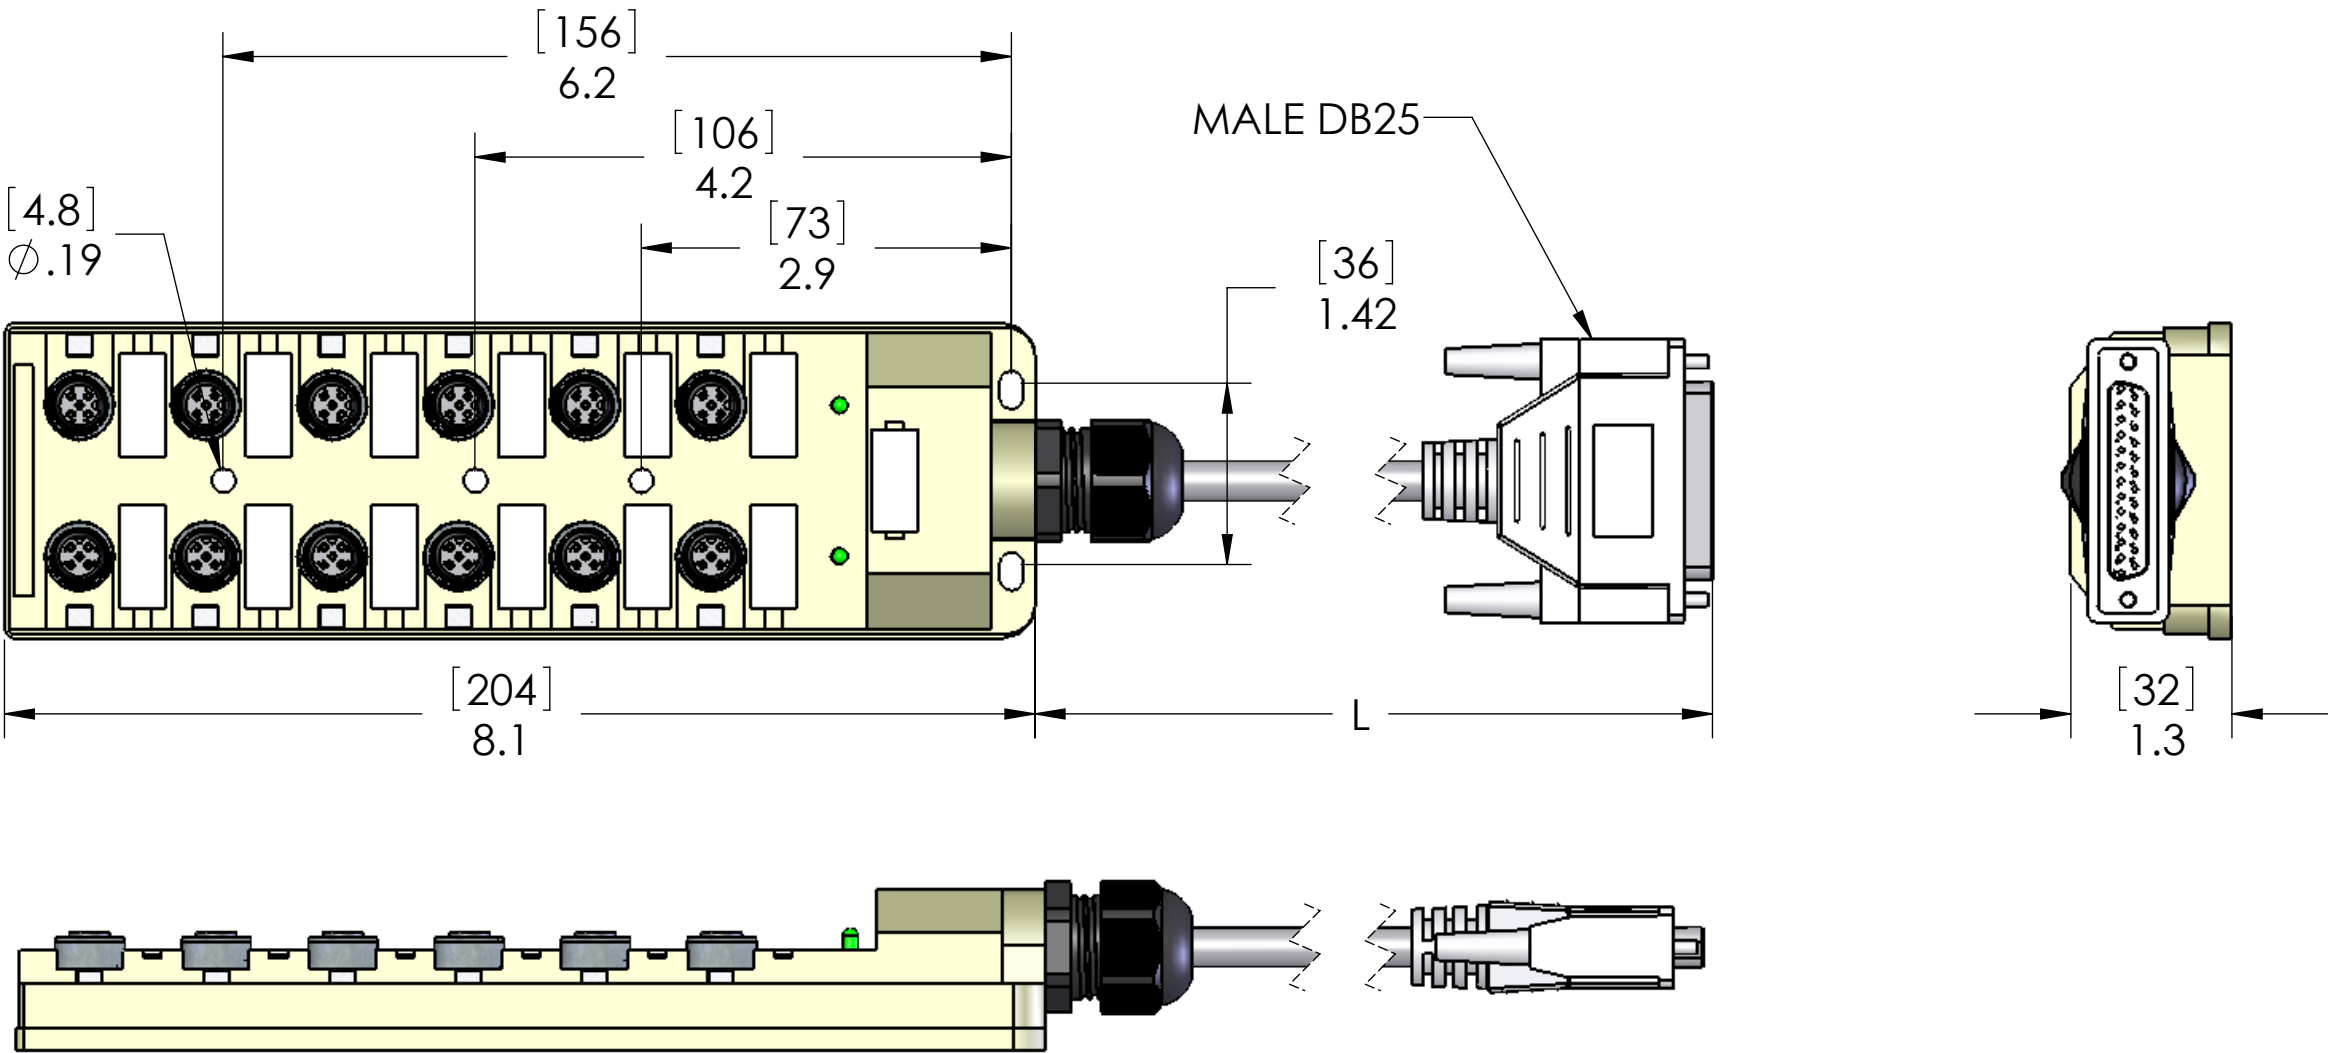

THIS IS A LIGHTED PNP BLOCK

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

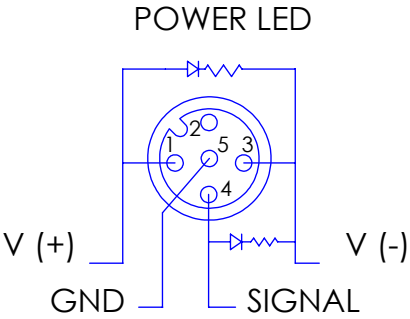

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES		BEM
TOLERANCES:		
FRACTIONAL ±1/64		
ANGULAR: MACH ±5° BEND ±5°		
TWO PLACE DECIMAL ±.01		
THREE PLACE DECIMAL ±.004		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

PART NUMBER		L
JDC-24P-225-D003		12" [0.3M]
JDC-24P-225-D010		40" [1M]
JDC-24P-225-D020		80" [2M]
JDC-24P-225-D030		118" [3M]
JDC-24P-225-D050		197" [5M]
JDC-24P-225-D060		240" [6M]
MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	JDC-24P-225-DZZ	A
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1