


WIRING		
WIRE COLOR	PORT/PIN	FUNCTION
GRAY/PINK	PORT 1 / PIN 2	I/O
WHITE	PORT 1 / PIN 4	I/O
RED/BLUE	PORT 2 / PIN 2	I/O
GREEN	PORT 2 / PIN 4	I/O
WHITE/GREEN	PORT 3 / PIN 2	I/O
YELLOW	PORT 3 / PIN 4	I/O
BROWN/GREEN	PORT 4 / PIN 2	I/O
GRAY	PORT 4 / PIN 4	I/O
WHITE/YELLOW	PORT 5 / PIN 2	I/O
PINK	PORT 5 / PIN 4	I/O
YELLOW/BROWN	PORT 6 / PIN 2	I/O
RED	PORT 6 / PIN 4	I/O
WHITE/GRAY	PORT 7 / PIN 2	I/O
BLACK	PORT 7 / PIN 4	I/O
GRAY/BROWN	PORT 8 / PIN 2	I/O
VIOLET	PORT 8 / PIN 4	I/O
WHITE/RED	PORT 9 / PIN 2	I/O
WHITE/PINK	PORT 9 / PIN 4	I/O
BROWN/RED	PORT 10 / PIN 2	I/O
PINK/BROWN	PORT 10 / PIN 4	I/O
WHITE/BLACK	PORT 11 / PIN 2	I/O
WHITE/BLUE	PORT 11 / PIN 4	I/O
BROWN/BLACK	PORT 12 / PIN 2	I/O
BROWN/BLUE	PORT 12 / PIN 4	I/O
BROWN	ALL PORTS PIN 1	V+
BROWN/WHITE	ALL PORTS PIN 1	V+
BLUE	ALL PORTS PIN 3	V-
GREEN/YELLOW	ALL PORTS PIN 5	GND



MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
CABLE:	PUR JKTD 18 & 22AWG
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	11/29/2005	

THIS IS AN NPN BLOCK

NART NUMBER		L
JDC-25N-228-C003		12"
JDC-25N-228-C010		40"
JDC-25N-228-C020		80"
JDC-25N-228-C030		118"
JDC-25N-228-C050		197"
JDC-25N-228-C060		240"
JDC-25N-228-C100		393"

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

NAME

BEM

CHECKED

ENG APPR.

MFG APPR.

Q.A.

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE **B**


DWG. NO. JDC-25N-228-CZZ

REV **A**

SCALE: 2:3

WEIGHT:

SHEET 1 OF 1

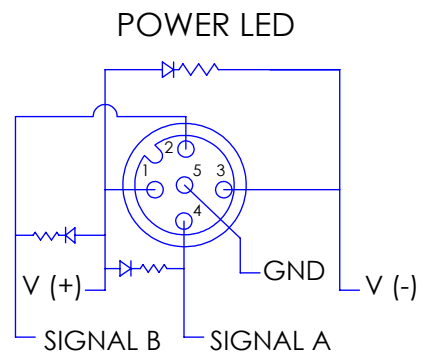

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.