


WIRING		
WIRE COLOR	PORT/PIN	FUNCTION
GRAY/PINK	PORT 1 / PIN 2	I/O
WHITE	PORT 1 / PIN 4	I/O
RED/BLUE	PORT 2 / PIN 2	I/O
GREEN	PORT 2 / PIN 4	I/O
WHITE/GREEN	PORT 3 / PIN 2	I/O
YELLOW	PORT 3 / PIN 4	I/O
BROWN/GREEN	PORT 4 / PIN 2	I/O
GRAY	PORT 4 / PIN 4	I/O
WHITE/YELLOW	PORT 5 / PIN 2	I/O
PINK	PORT 5 / PIN 4	I/O
YELLOW/BROWN	PORT 6 / PIN 2	I/O
RED	PORT 6 / PIN 4	I/O
WHITE/GRAY	PORT 7 / PIN 2	I/O
BLACK	PORT 7 / PIN 4	I/O
GRAY/BROWN	PORT 8 / PIN 2	I/O
VIOLET	PORT 8 / PIN 4	I/O
WHITE/RED	PORT 9 / PIN 2	I/O
WHITE/PINK	PORT 9 / PIN 4	I/O
BROWN/RED	PORT 10 / PIN 2	I/O
PINK/BROWN	PORT 10 / PIN 4	I/O
WHITE/BLACK	PORT 11 / PIN 2	I/O
WHITE/BLUE	PORT 11 / PIN 4	I/O
BROWN/BLACK	PORT 12 / PIN 2	I/O
BROWN/BLUE	PORT 12 / PIN 4	I/O
BROWN	ALL PORTS PIN 1	V+
BROWN/WHITE	ALL PORTS PIN 1	V+
BLUE	ALL PORTS PIN 3	V-
GREEN/YELLOW	ALL PORTS PIN 5	GND

MATERIALS:	
BODY:	POLYPROPYLENE
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
CABLE:	PUR JKTD 18 & 22AWG
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

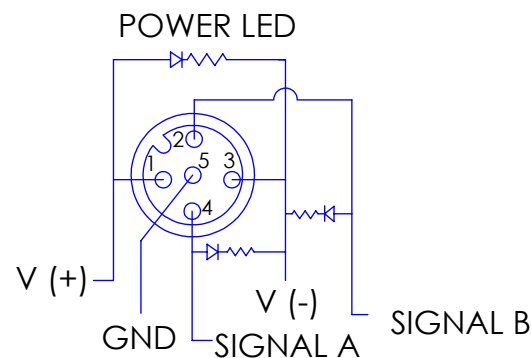


THIS IS A PNP BLOCK

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	11/29/2005	

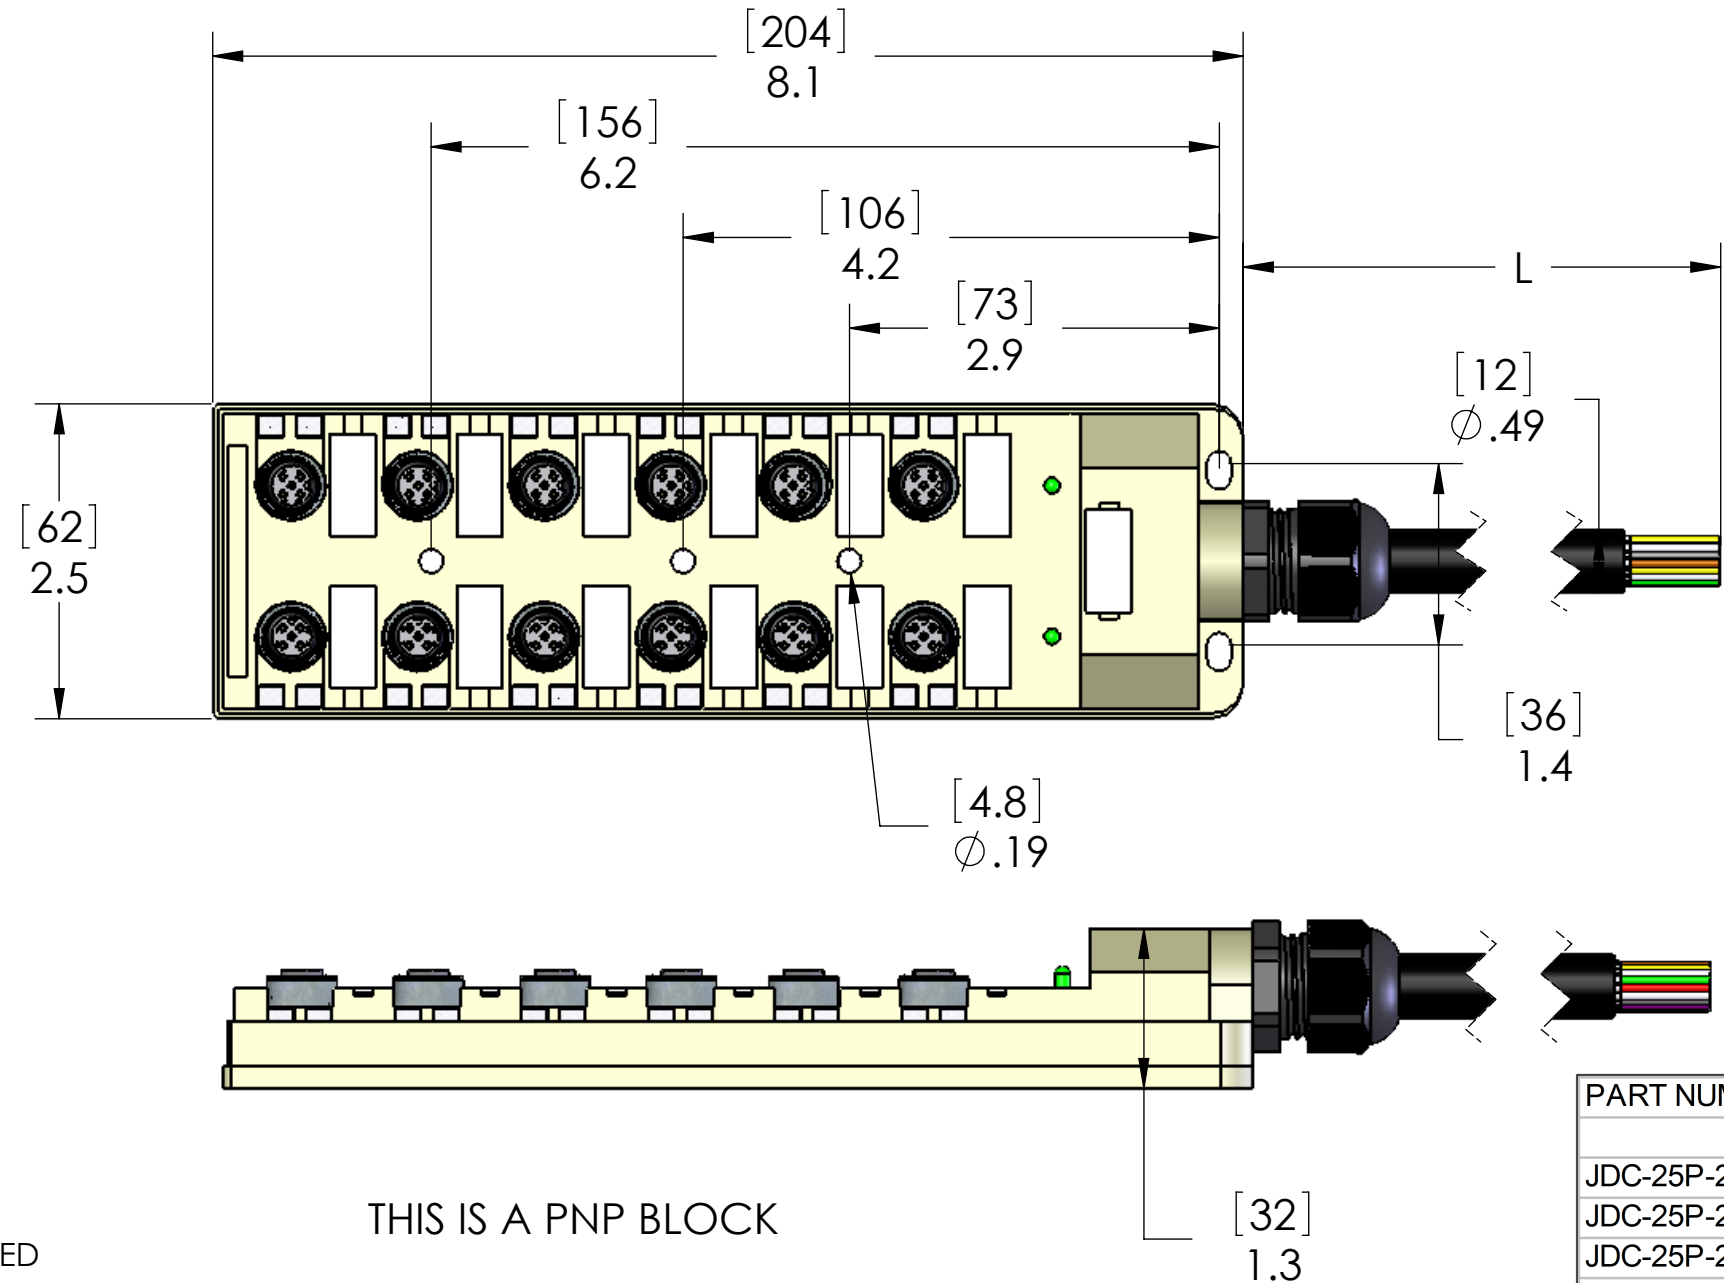

PART NUMBER	L
JDC-25P-228-C003	12"
JDC-25P-228-C010	40"
JDC-25P-228-C020	80"
JDC-25P-228-C030	118"
JDC-25P-228-C050	197"
JDC-25P-228-C060	240"
JDC-25P-228-C100	393"

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM			
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.		SIZE B	DWG. NO. JDC-25P-228-CZZ	REV A
		MATERIAL	COMMENTS:				
		FINISH					
		DO NOT SCALE DRAWING			SCALE: 2:3	WEIGHT:	SHEET 1 OF 1