


8 7 6 5 4 3 2 1


WIRING	
COLOR	FUNCTION
J1 - +	V+ (ALL PORTS PIN 1)
J1 - -	V- (ALL PORTS PIN 3)
J1 - GND	GND (ALL PORTS PIN 5)
J2 - 1	PORT 1 PIN 4
J2 - 2	PORT 2 PIN 4
J2 - 3	PORT 3 PIN 4
J2 - 4	PORT 4 PIN 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/15/2007	

ACCEPTABLE CABLE
DIAMETERS: 5 - 13mm

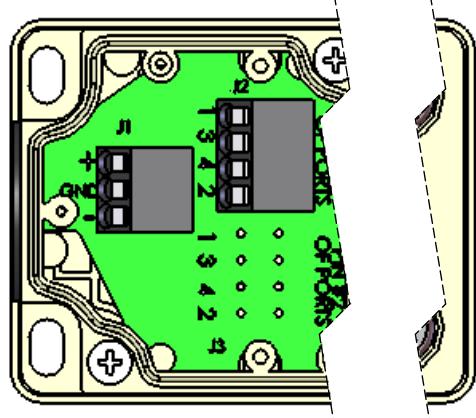

CONNECTIONS MADE
VIA SPRING CLAMP
TERMINAL BLOCKS

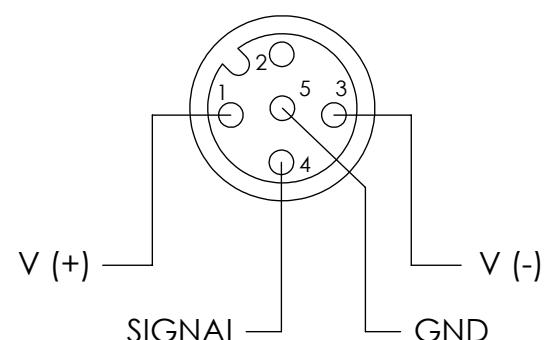

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	150V MAX
AMPS:	3A PER PORT, 8A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

4	3	2	1	MENCOM CORPORATION	
UNLESS OTHERWISE SPECIFIED:		NAME		TITLE:	
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	DWM		
		CHECKED			
		ENG APPR.			
		MFG APPR.			
		Q.A.		COMMENTS:	
		MATERIAL			
		FINISH			
		DO NOT SCALE DRAWING			
SIZE	DWG. NO.	REV	B JDC-440-007-F000 A		
SCALE: 1:1	WEIGHT:		SHEET 1 OF 1		