
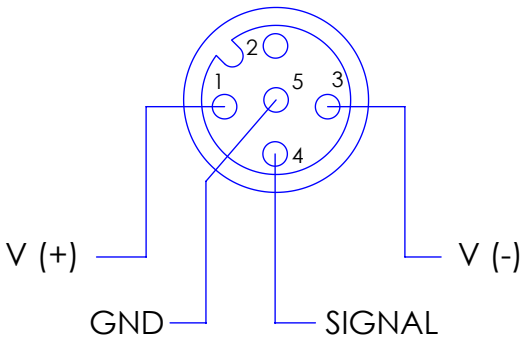


WIRING	
FUNCTION	MCV PIN
V+ (ALL PORTS PIN 1)	11
V- (ALL PORTS PIN 3)	9 & 10
GND (ALL PORTS PIN 5)	12
PORT 1 PIN 4	1
PORT 2 PIN 4	2
PORT 3 PIN 4	3
PORT 4 PIN 4	4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/20/2007	

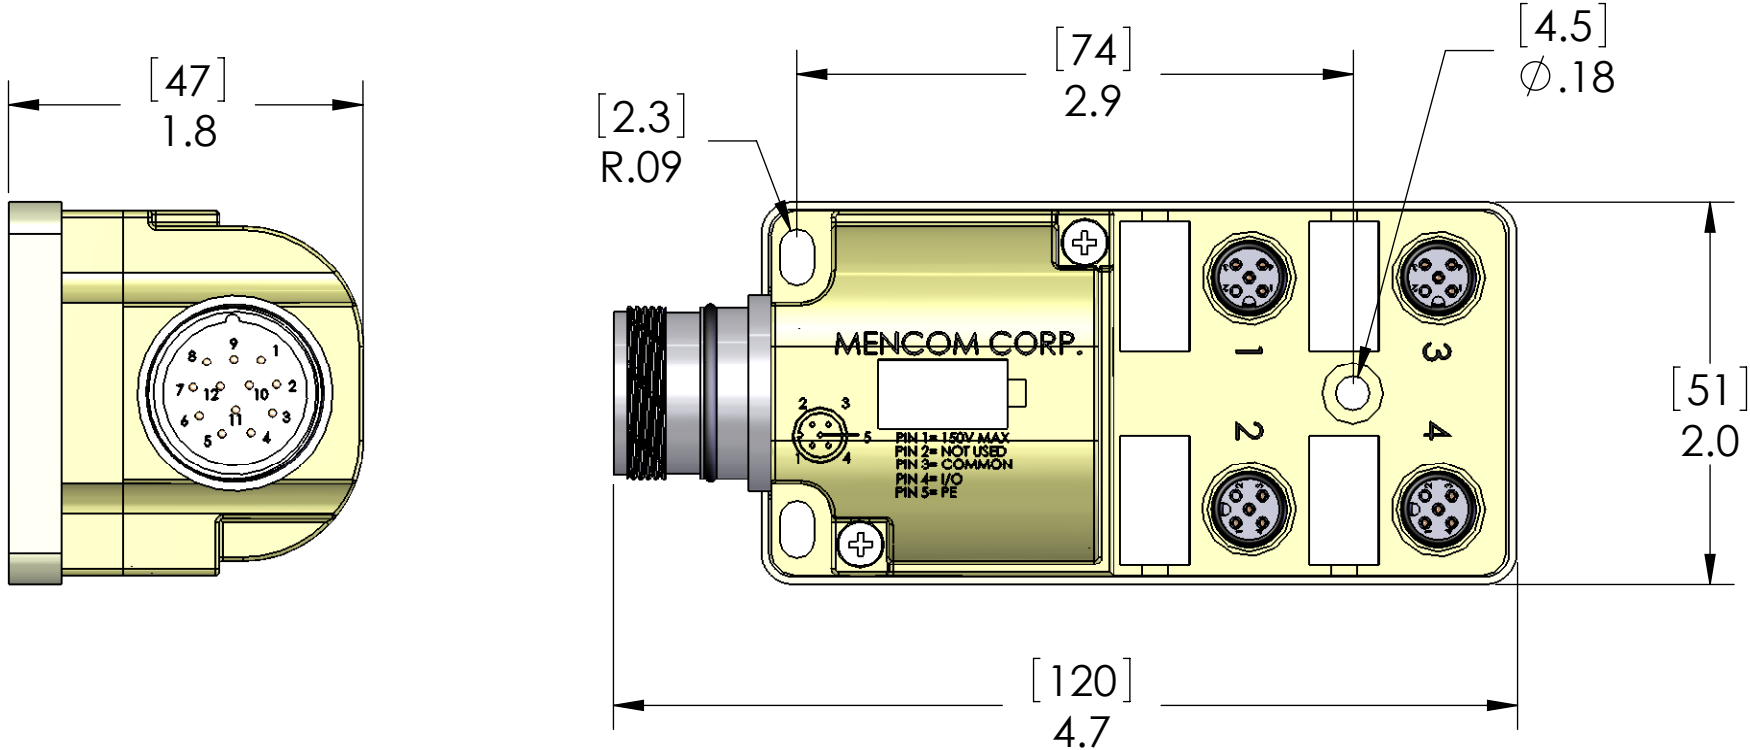

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
MCV BODY:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	150V MAX
AMPS:	3A PER PORT, 10A PER BLOCK

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]		DWM		
		DRAWN		
		CHECKED		
		ENG APPR.		
		MFG APPR.	TITLE:	
		Q.A.		
		COMMENTS:		
MATERIAL			SIZE	DWG. NO.
FINISH			B	JDC-440-012-V000
DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:
				SHEET 1 OF 1