
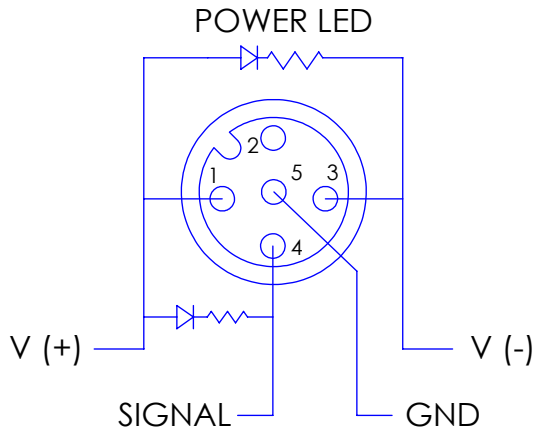
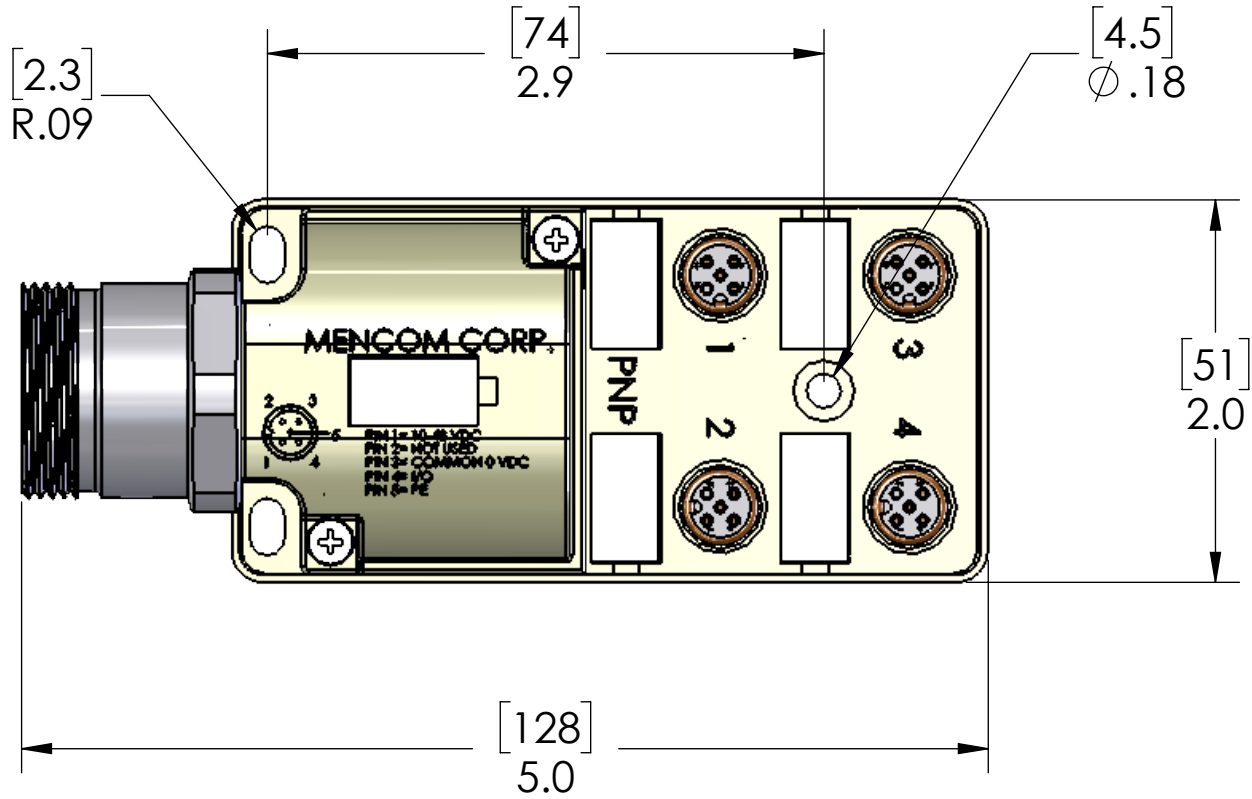


WIRING	
FUNCTION	MIN PIN
V+ (ALL PORTS PIN 1)	10
V- (ALL PORTS PIN 3)	11
GND (ALL PORTS PIN 5)	9
PORT 1 PIN 4	1
PORT 2 PIN 4	2
PORT 3 PIN 4	3
PORT 4 PIN 4	4

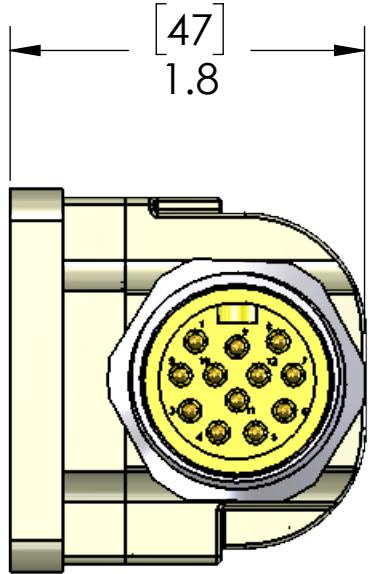

THIS IS AN PNP BLOCK

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
MIN BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 10A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH	MENCOM CORPORATION	
	DRAWN DATE	06/12/2017		
	CHECKED BY	ADM		
	CHECK DATE	06/12/2017		
MATERIAL	COMMENTS:		TITLE:	
			SIZE DWG. NO. REV	
			B JDC-44P-212-M000 B	
DO NOT SCALE DRAWING			SCALE: 1:1	SHEET 1 OF 1