
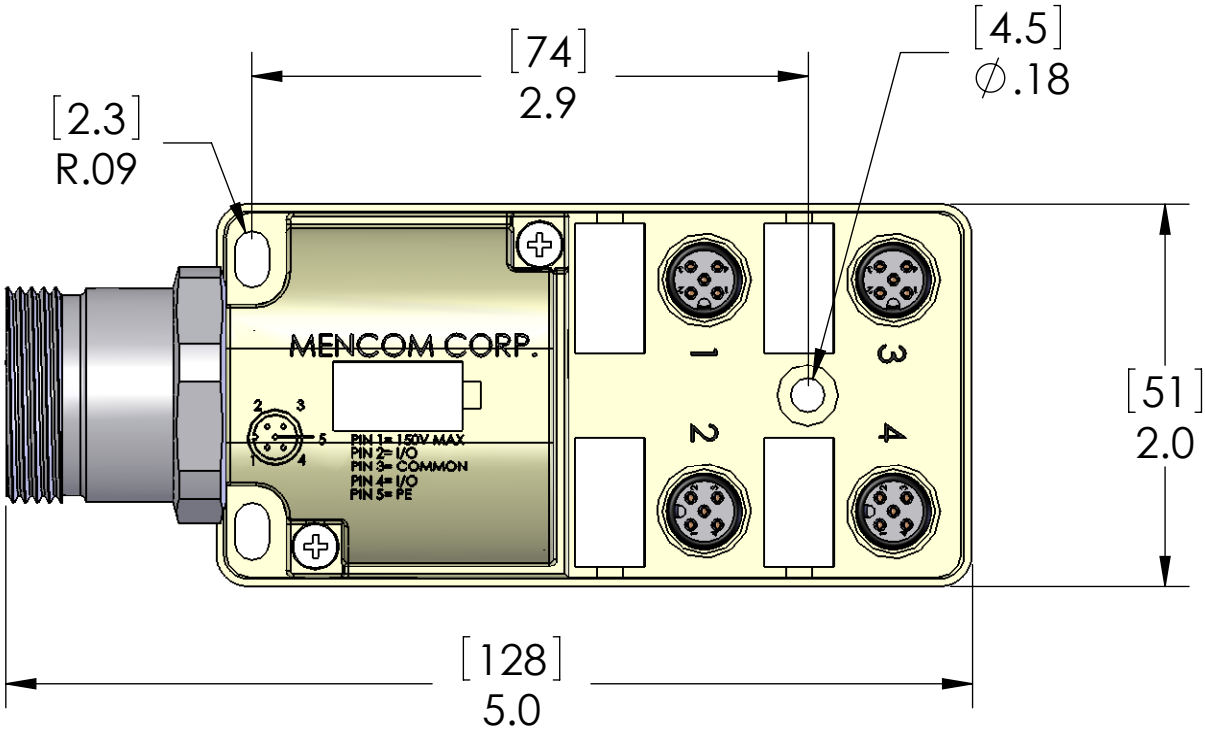



WIRING	
FUNCTION	MIN PIN
V+ (ALL PORTS PIN 1)	10
V- (ALL PORTS PIN 3)	11
GND (ALL PORTS PIN 5)	9
PORT 1 PIN 4	1
PORT 2 PIN 4	2
PORT 3 PIN 4	3
PORT 4 PIN 4	4
PORT 1 PIN 2	5
PORT 2 PIN 2	6
PORT 3 PIN 2	7
PORT 4 PIN 2	8

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	11/22/2011	CAM

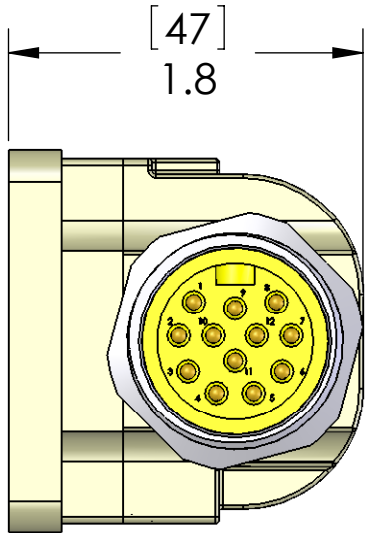

SUGGESTED MATING CABLES FOR 12 POLE MIN: MIN-12FPX-ZZ
(ZZ IS LENGTH IN FEET) MINP-12FPX-ZZ

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
MIN BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	150V MAX
AMPS:	3A PER PORT, 10A PER BLOCK

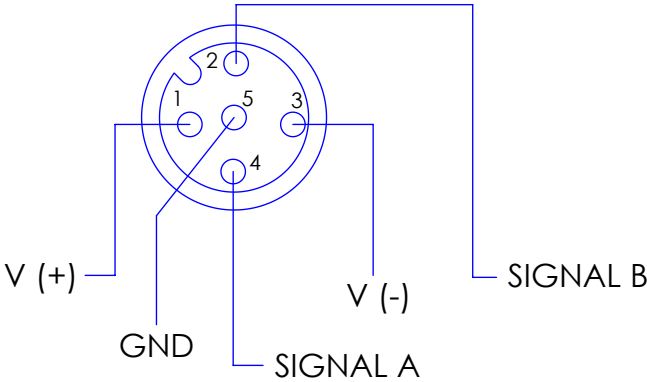

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION			
			DRAWN	BEM				
			CHECKED					
			ENG APPR.					
			MFG APPR.					
		Q.A.						
		MATERIAL	COMMENTS:	SIZE				
				DWG. NO.				REV
				JDC-450-012-M000				A
		FINISH		SCALE: 1:1		WEIGHT:		SHEET 1 OF 1
				DO NOT SCALE DRAWING				