





WIRING	
COLOR	FUNCTION
J1 - +	V+ (ALL PORTS PIN 1)
J1 - -	V- (ALL PORTS PIN 3)
J1 - GND	GND (ALL PORTS PIN 5)
J2 - 1	PORT 1 PIN 4
J2 - 2	PORT 2 PIN 4
J2 - 3	PORT 3 PIN 4
J2 - 4	PORT 4 PIN 4
J3 - 1	PORT 1 PIN 2
J3 - 2	PORT 2 PIN 2
J3 - 3	PORT 3 PIN 2
J3 - 4	PORT 4 PIN 2

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/20/2007	

ACCEPTABLE CABLE
DIAMETERS: 5 - 13mm

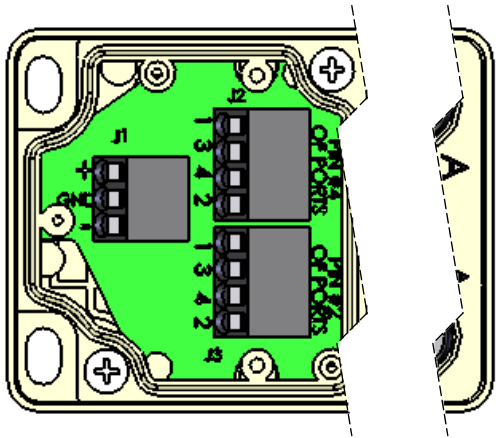

CONNECTIONS MADE
VIA SPRING CLAMP
TERMINAL BLOCKS

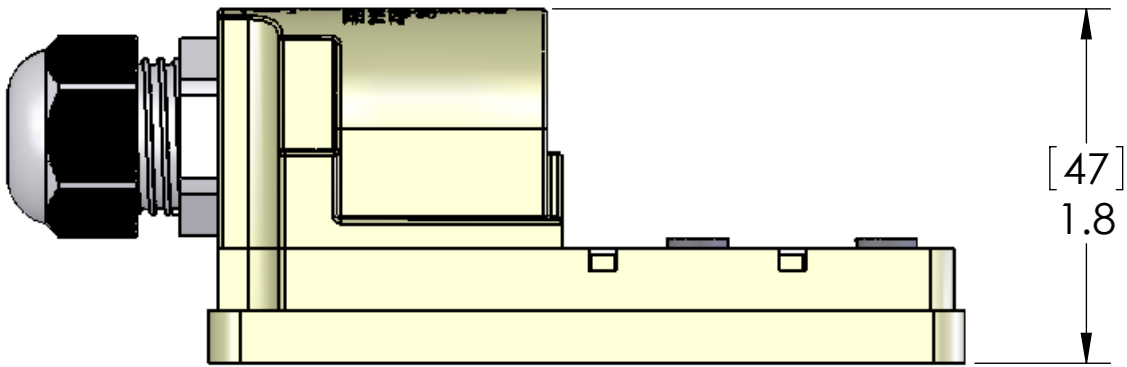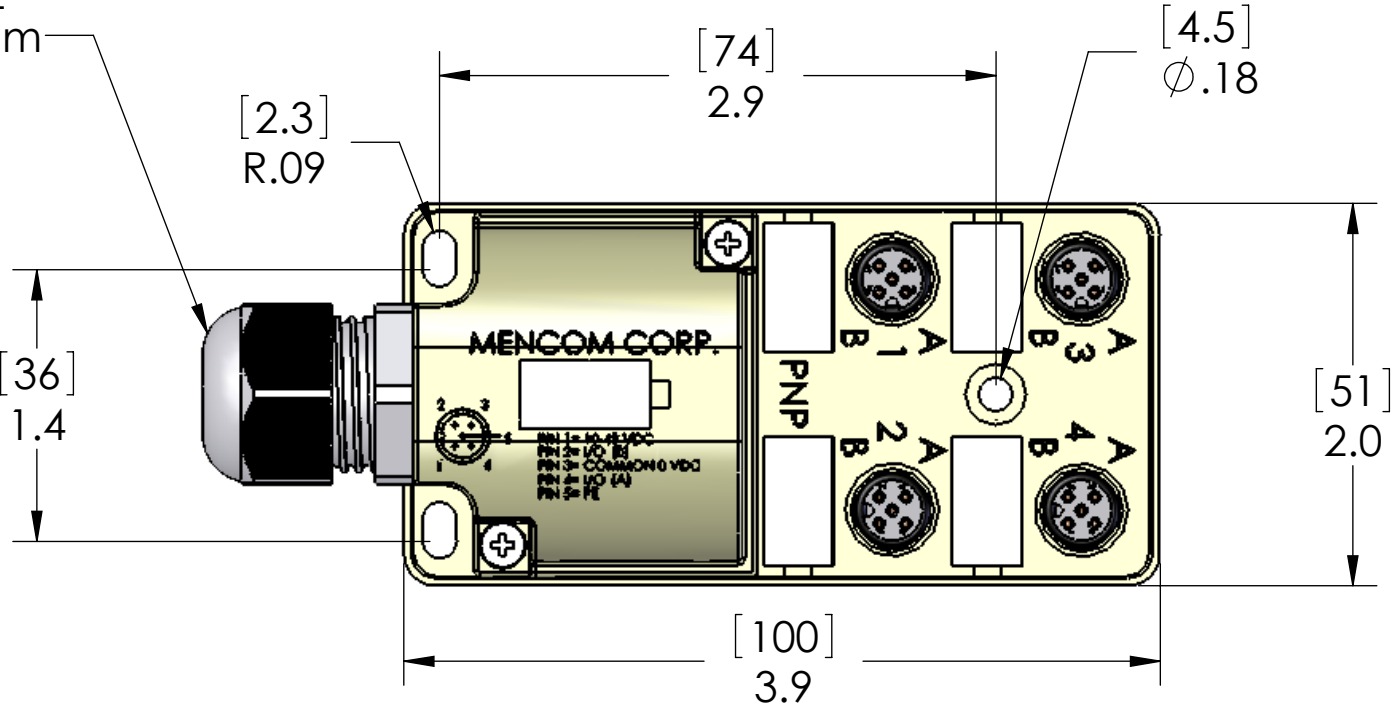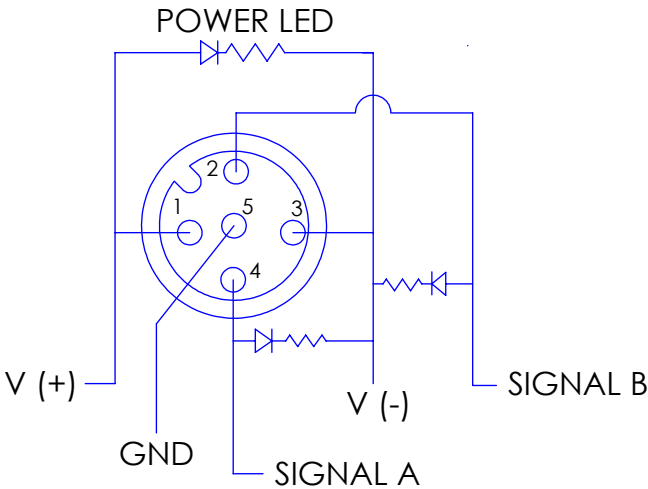

THIS IS A LIGHTED PNP BLOCK

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION			
		DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	DWM	TITLE:		
				CHECKED				
				ENG APPR.				
				MFG APPR.				
			Q.A.					
			COMMENTS:					
		MATERIAL			SIZE	DWG. NO.		REV
		FINISH			B	JDC-45P-211-F000		A
		DO NOT SCALE DRAWING			SCALE: 1:1		WEIGHT:	SHEET 1 OF 1

REV
A