



DB9 Pin #	Port / Pin	Function
1	Port 1 / Pin 4	I / O
2	Port 2 / Pin 4	I / O
3	Port 3 / Pin 4	I / O
4	Port 4 / Pin 4	I / O
5	Port 5 / Pin 5	I / O
6	Port 6 / Pin 6	I / O
7	All Ports Pin 1	V+
8	All Ports Pin 1	V+
9	All Ports Pin 3	V-
SHIELD	All Ports Pin 5	GND

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	12/16/2009	

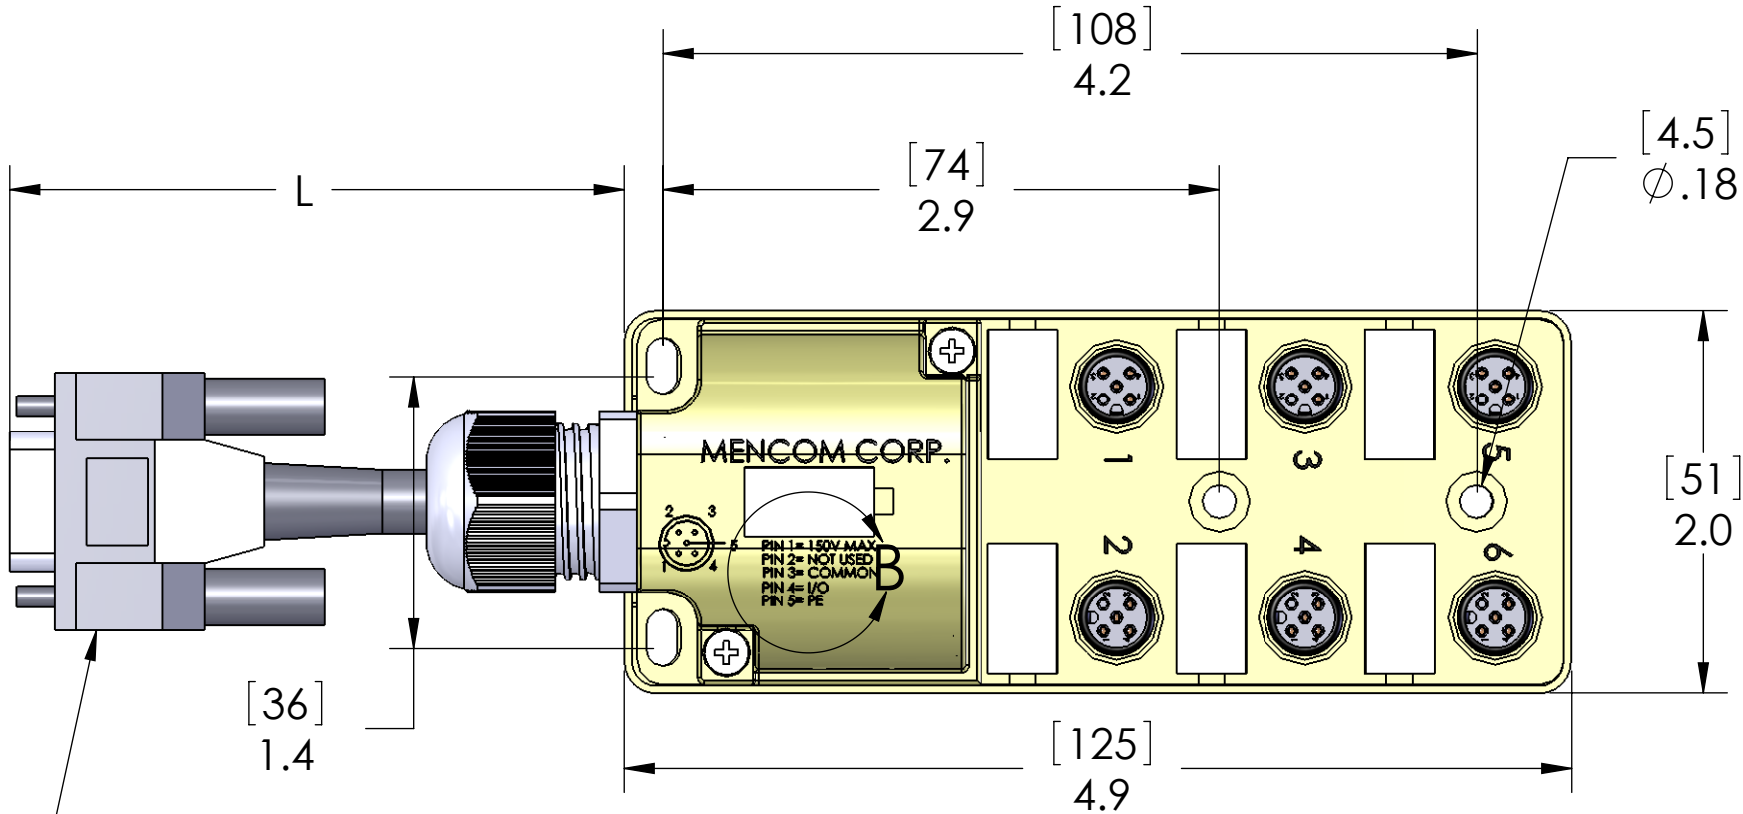

MALE DB9
CONNECTOR



DETAIL B
SCALE 2 : 1

TABLE A	
P/N	L
JDC-640-009-D003	12" [0.3]
JDC-640-009-D010	40" [1m]
JDC-640-009-D020	79" [2m]
JDC-640-009-D030	118" [3m]
JDC-640-009-D040	157" [4m]
JDC-640-009-D050	197" [5m]
JDC-640-009-D060	240" [6m]
JDC-640-009-D080	315" [8m]

MATERIALS	
BODY:	PBT
CABLE GLAND:	POLYAMIDE
CABLE:	20/3, 24/6 SHIELDED PVC JACKETED
CONTACTS:	GOLD PLATED COPPER ALLOY
RATINGS:	
AMPERAGE:	2A PER PORT, 8A PER BLOCK
VOLTAGE:	10 - 48VDC
SEAL RATING:	IP65 BLOCK, IP40 DB9

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]		DWM
		DRAWN
		CHECKED
		ENG APPR.
		MFG APPR.
		Q.A.
		COMMENTS:
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION

TITLE:

SIZE DWG. NO. REV

B JDC-640-009-Dzz **A**

SCALE: 1:1 WEIGHT: SHEET 1 OF 1