



| WIRING | |
|----------|-----------------------|
| COLOR | FUNCTION |
| J1 - + | V+ (ALL PORTS PIN 1) |
| J1 - - | V- (ALL PORTS PIN 3) |
| J1 - GND | GND (ALL PORTS PIN 5) |
| J2 - 1 | PORT 1 PIN 4 |
| J2 - 2 | PORT 2 PIN 4 |
| J2 - 3 | PORT 3 PIN 4 |
| J2 - 4 | PORT 4 PIN 4 |
| J2 - 5 | PORT 5 PIN 4 |
| J2 - 6 | PORT 6 PIN 4 |
| J2 - 7 | PORT 7 PIN 4 |
| J2 - 8 | PORT 8 PIN 4 |

| REVISIONS | | | |
|-----------|---------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | REDRAWN IN SW | 2/20/2007 | |


ACCEPTABLE CABLE
DIAMETERS: 5 - 13mm

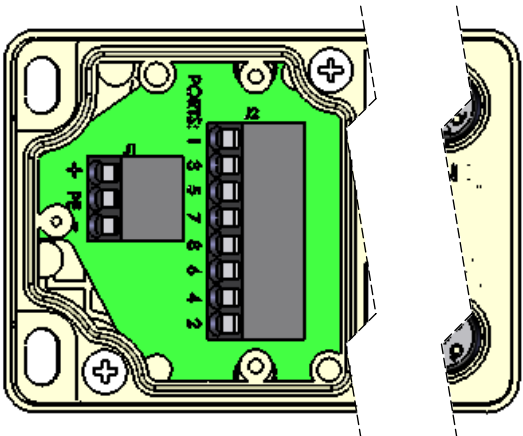


CONNECTIONS MADE
VIA SPRING CLAMP
TERMINAL BLOCKS

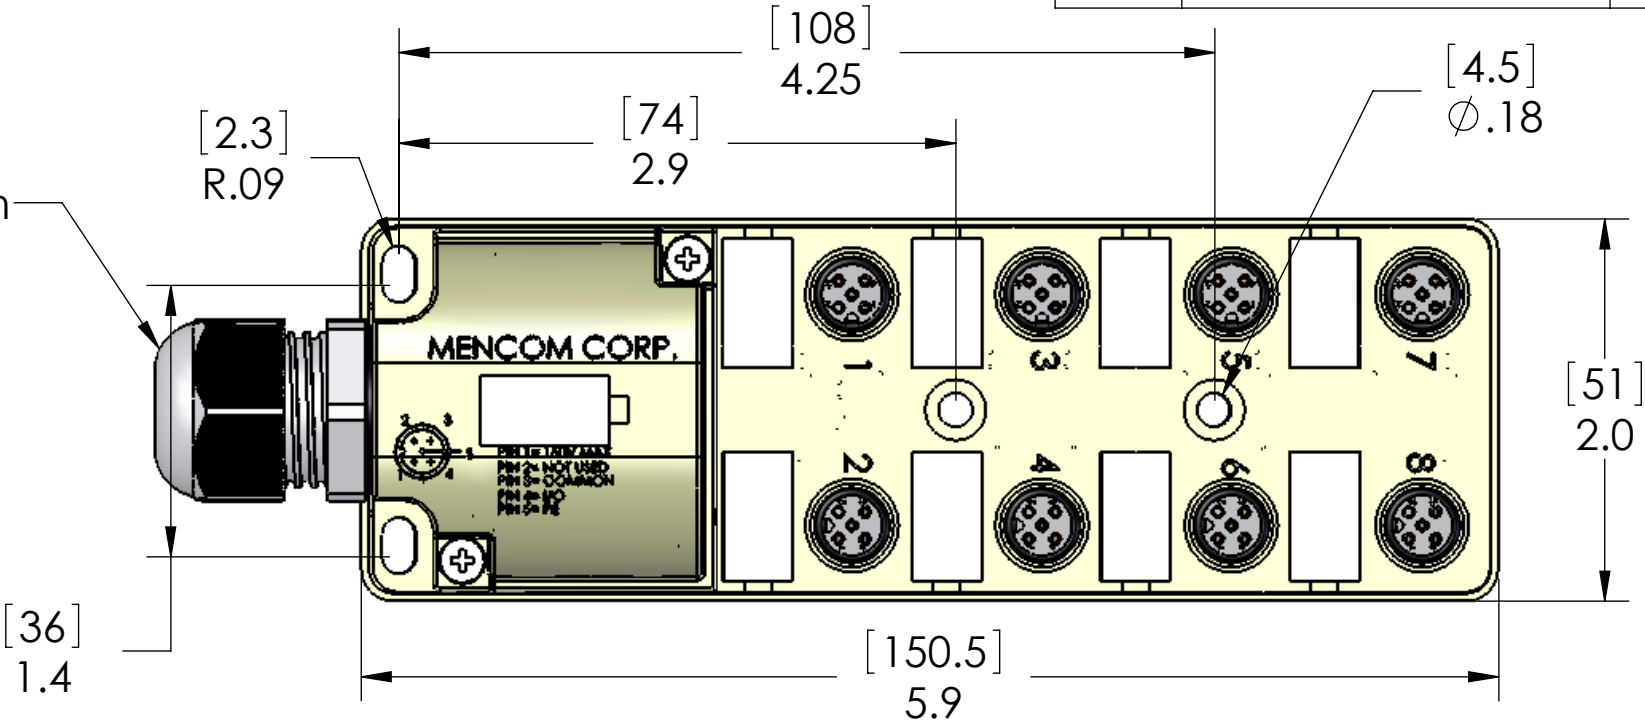

[36]
1.4

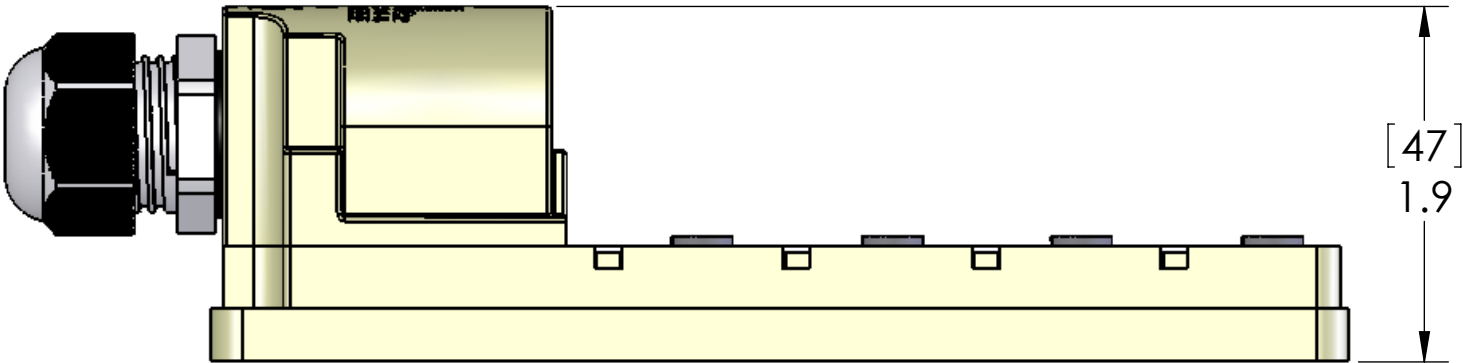

| MATERIALS: | |
|------------|---------------------------|
| BODY: | PBT |
| MARKERS: | POLYAMIDE |
| INSERTS: | POLYAMIDE |
| GLAND: | POLYAMIDE |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| O-RINGS: | NBR |
| RATINGS: | |
| VOLTS: | 150V MAX |
| AMPS: | 3A PER PORT, 8A PER BLOCK |

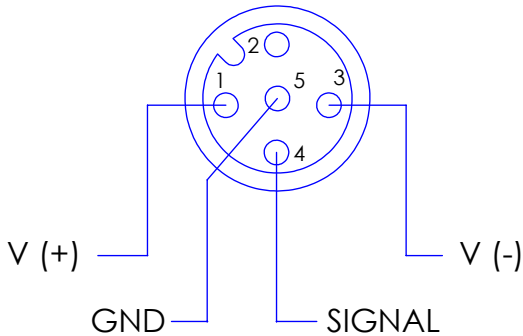

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

| | | | | | | | |
|--|--|--------------------------------------|-----------|------|---|---------|--------------|
| | | UNLESS OTHERWISE SPECIFIED: | | NAME | MENCOM CORPORATION | | |
| | | DIMENSIONS ARE IN INCHES AND [MM] | DRAWN | DWM | TITLE: | | |
| | | | CHECKED | | | | |
| | | | ENG APPR. | | | | |
| | | | MFG APPR. | | | | |
| | | | Q.A. | | | | |
| | | | COMMENTS: | | SIZE DWG. NO. REV B JDC-840-011-F000 A | | |
| | | MATERIAL | | | | | |
| | | FINISH | | | | | |
| | | DO NOT SCALE DRAWING | | | SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1 |