



WIRING		
MCV	PORT/PIN	FUNCTION
19	ALL PORTS PIN 1	V+
12	GND	GND
6	ALL PORTS PIN 3	V-
7	PORT 1 PIN 2	I/O
15	PORT 1 PIN 4	I/O
4	PORT 2 PIN 2	I/O
5	PORT 2 PIN 4	I/O
8	PORT 3 PIN 2	I/O
16	PORT 3 PIN 4	I/O
14	PORT 4 PIN 2	I/O
3	PORT 4 PIN 4	I/O
9	PORT 5 PIN 2	I/O
17	PORT 5 PIN 4	I/O
13	PORT 6 PIN 2	I/O
2	PORT 6 PIN 4	I/O
10	PORT 7 PIN 2	I/O
11	PORT 7 PIN 4	I/O
18	PORT 8 PIN 2	I/O
1	PORT 8 PIN 4	I/O




DETAIL B
SCALE 2 : 1

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
SHELLS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	FPM & NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

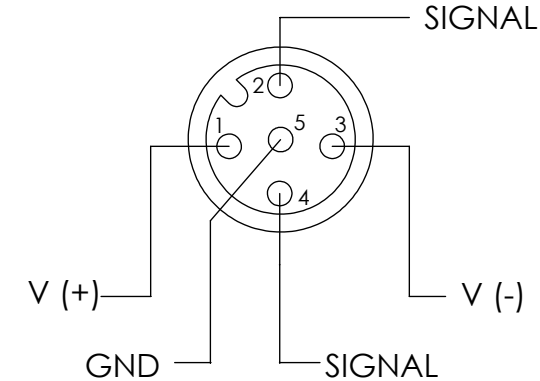

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	10/17/2014	BEM

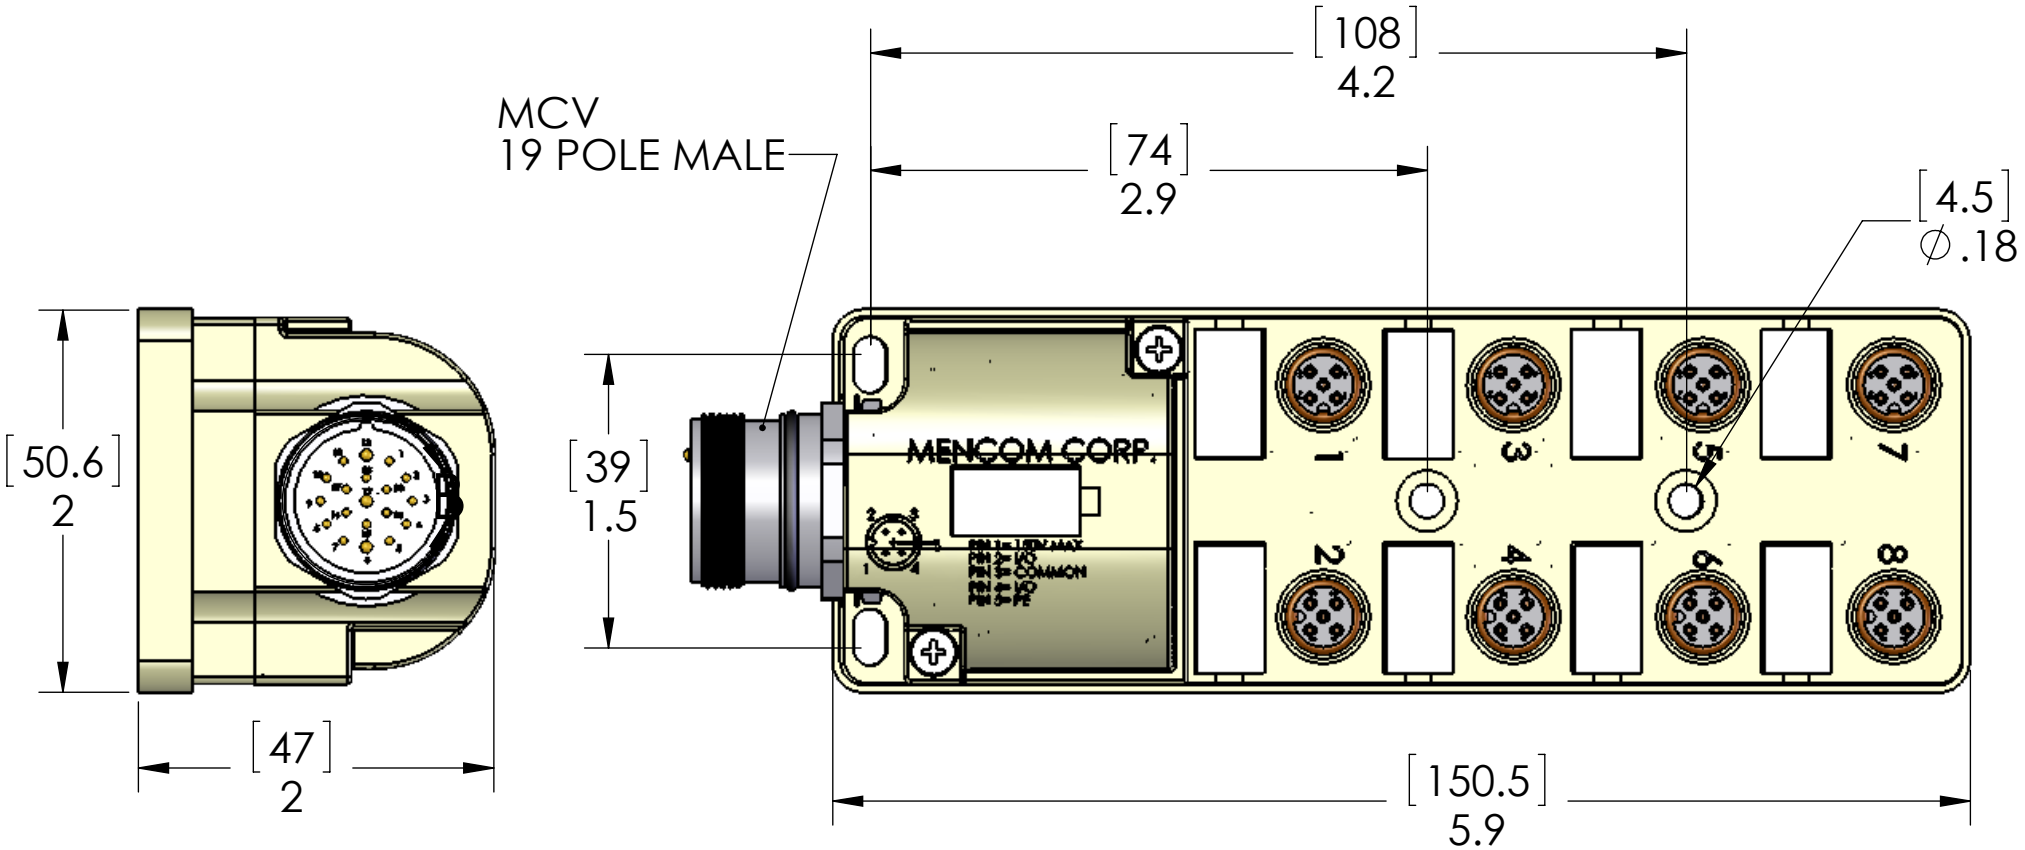

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	NAME	MENCOM CORPORATION		
	DRAWN	JJH	TITLE:	
	CHECKED			
	ENG APPR.			
	MFG APPR.			
INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.			
MATERIAL	COMMENTS:			
FINISH				
APPLICATION	DO NOT SCALE DRAWING			
		SIZE	DWG. NO.	REV
		B	JDC-850-019-V000	A
		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1