


P/N	L
JDC-85P-225-D003	12" [0.3m]
JDC-85P-225-D010	39" [1m]
JDC-85P-225-D020	79" [2m]
JDC-85P-225-D030	118" [3m]
JDC-85P-225-D040	157" [4m]
JDC-85P-225-D050	197" [5m]
JDC-85P-225-D060	236" [6m]
JDC-85P-225-D080	315" [8m]
JDC-85P-225-D100	393" [10m]

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	05/16/2006	
B	corrected wiring table	7/12/2010	

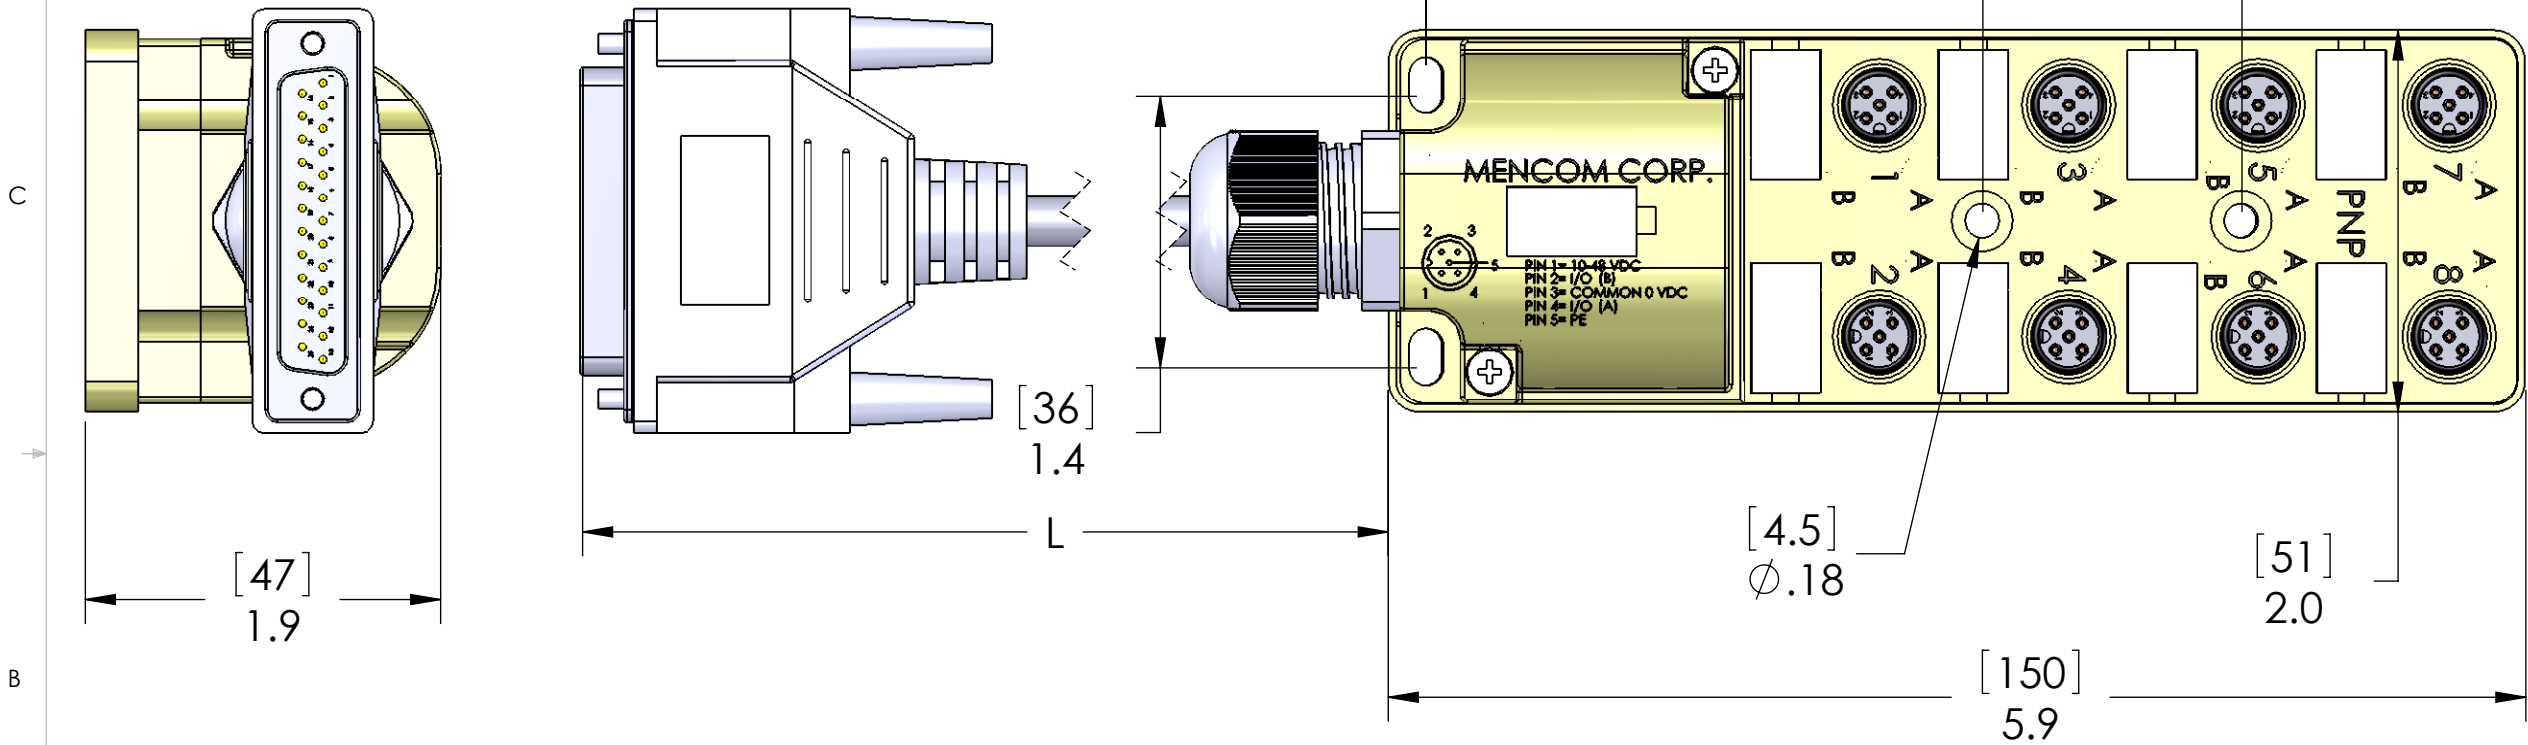

DB PIN	FUNCTION
22 & 23	V+
24 & 25	V-
SHELL	GROUND
1	PORT 1 PIN 4
2	PORT 1 PIN 2
3	PORT 2 PIN 4
4	PORT 2 PIN 2
5	PORT 3 PIN 4
6	PORT 3 PIN 2
7	PORT 4 PIN 4
8	PORT 4 PIN 2
9	PORT 5 PIN 4
10	PORT 5 PIN 2
11	PORT 6 PIN 4
12	PORT 6 PIN 2
13	PORT 7 PIN 4
14	PORT 7 PIN 2
15	PORT 8 PIN 4
16	PORT 8 PIN 2

MATERIALS	
BODY:	PBT
CABLE GLAND:	POLYAMIDE
CABLE:	20/4, 24/21 SHIELDED PVC JACKETED
CONTACTS:	GOLD PLATED COPPER ALLOY
RATINGS:	
AMPERAGE:	2A PER PORT, 8A PER BLOCK
VOLTAGE:	10 - 48VDC
SEAL RATING:	IP67 BLOCK, IP40 DB25

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.				
		MATERIAL	COMMENTS:				
		FINISH					
		DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1