



WIRING WHEN USED FOR DEVICENET	
FUNCTION	ALL MDC
DRAIN	1
V+ (Red)	2
V- (Black)	3
CAN_H (White)	4
CAN_L (Blue)	5

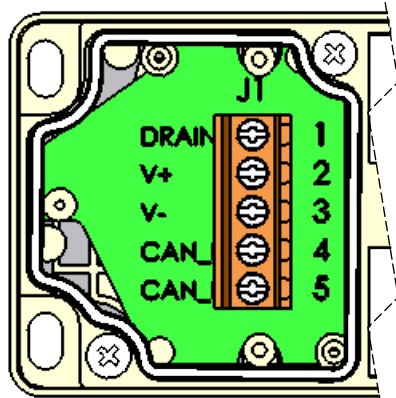

WIRING CHAMBER

ACCEPTABLE CABLE DIAMETERS: 5 - 13mm (TIGHTEN TO 2.7Nm)

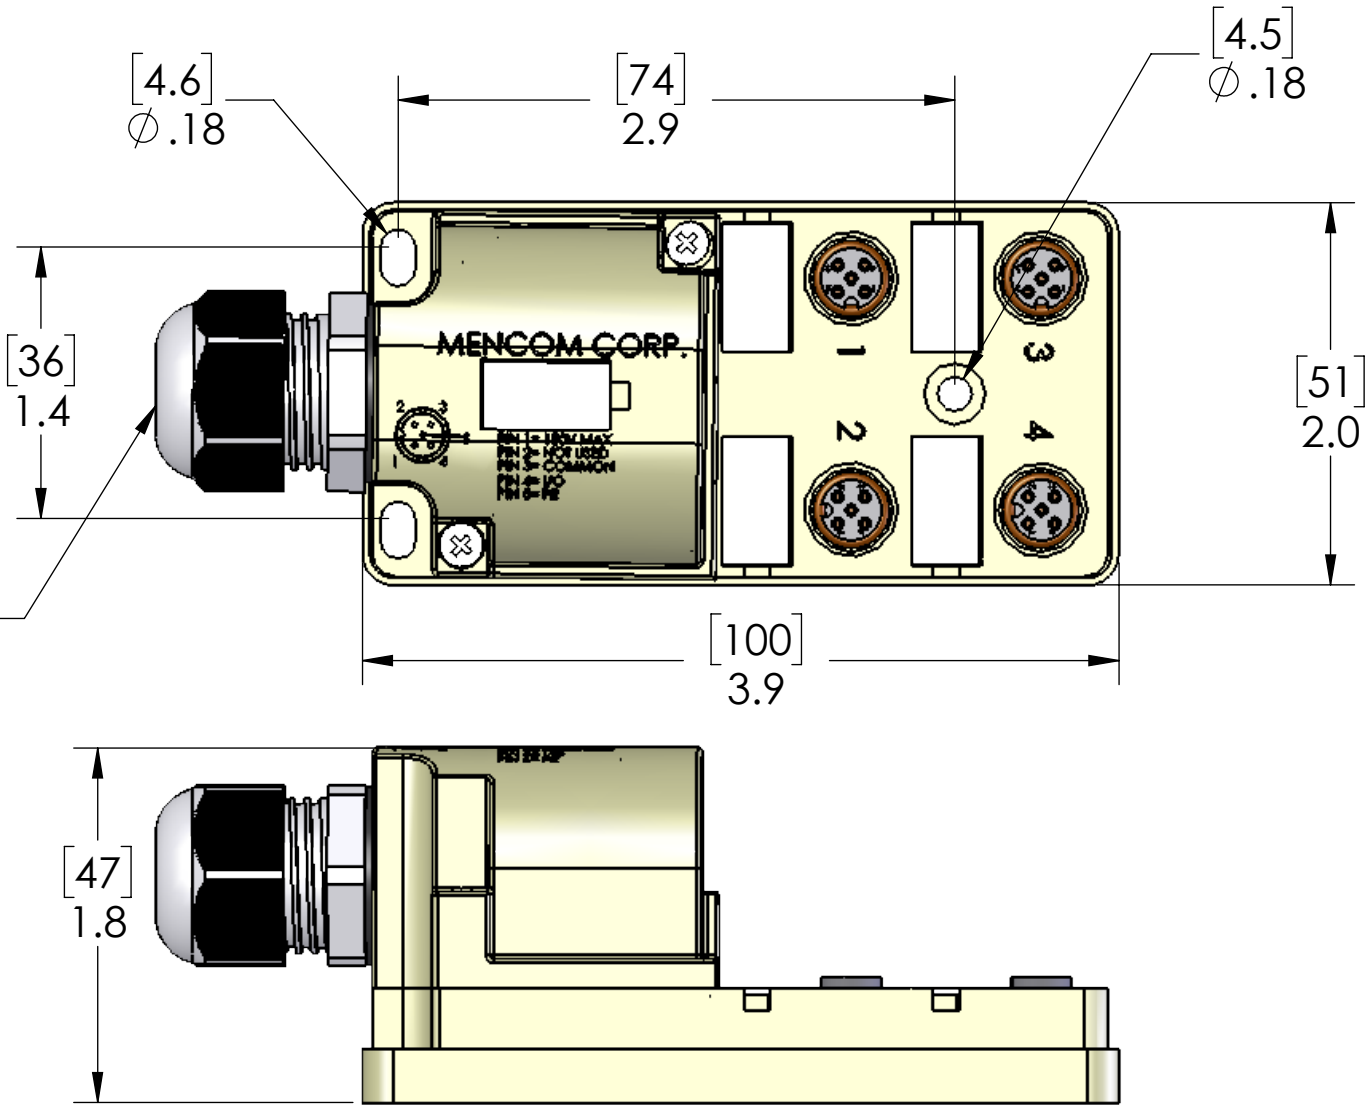

SUGGESTED WIRE SIZE: 24AWG-16AWG

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
GLAND SEALS:	CR/NBR & TPE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	FPM
RATINGS:	
VOLTS:	150V MAX
AMPS:	3A PER PORT, 8A PER BLOCK
CERTIFICATIONS:	
US:	UL LISTED
CANADA:	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH
	DRAWN DATE	08/20/2018
	CHECKED BY	ADM
	CHECK DATE	08/20/2018
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	JDN-450-005-F000	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1