
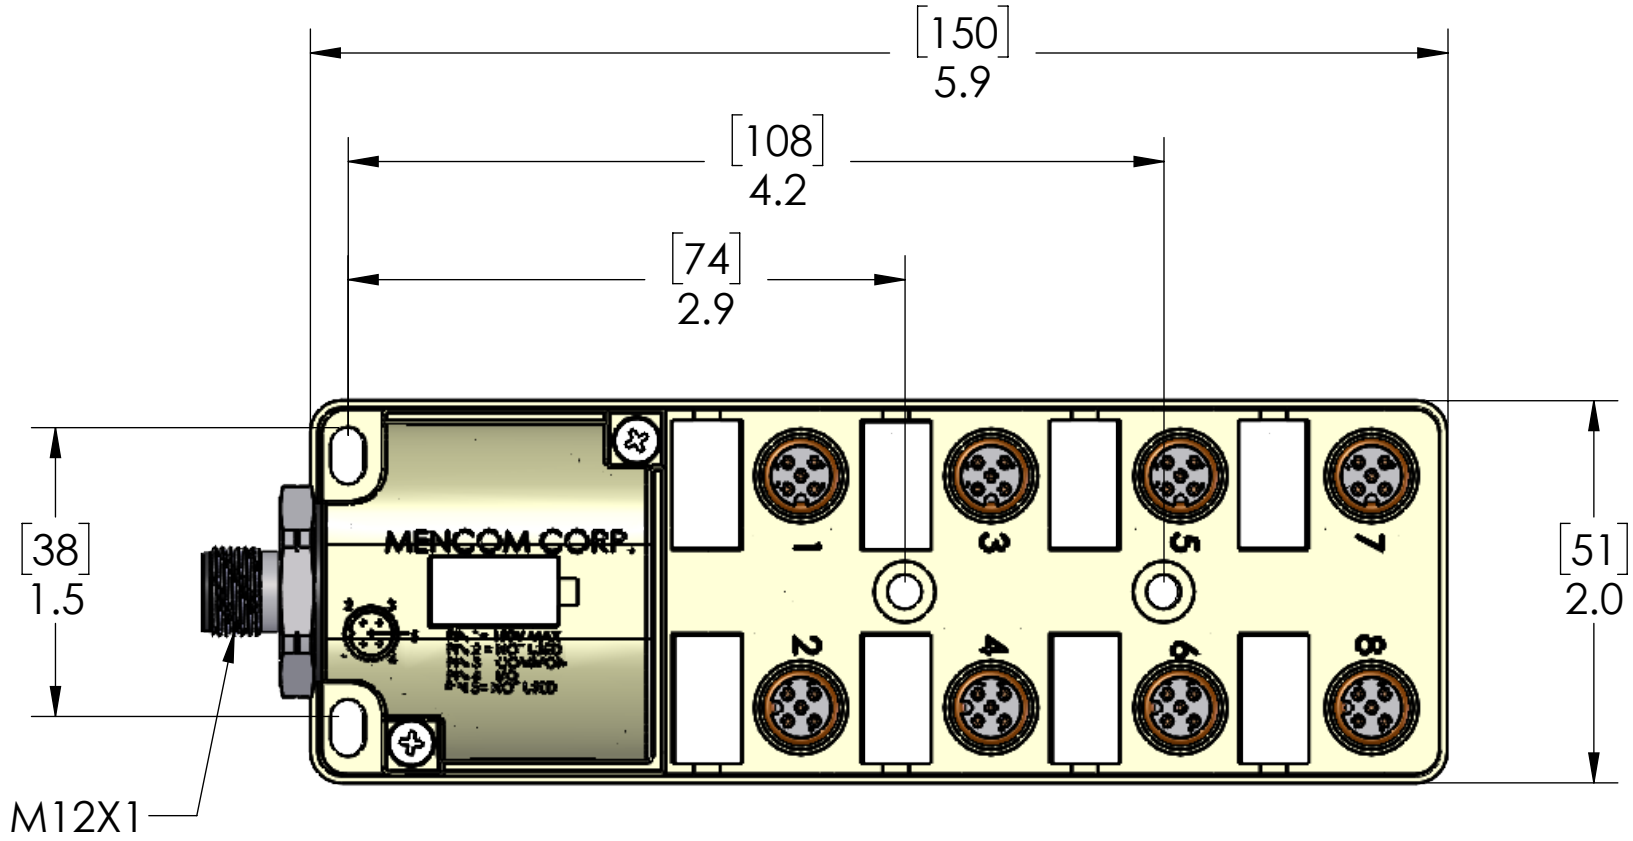


WIRING		
M12 CONN (INCOMING)	M12 CONN (PORT)	FUNCTION
1	1	DRAIN
2	2	V+
3	3	V-
4	4	CAN_H
5	5	CAN_L

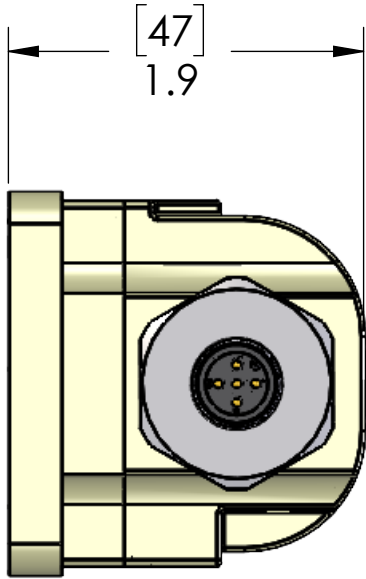

MATERIALS:	
BLOCK HOUSING:	PBT
PORT CONN INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
OUTPUT CONN HSG:	NICKEL PLATED BRASS
OUTPUT CONN INS.:	POLYAMIDE
O-RINGS:	NBR & FPM
RATINGS:	
VOLTAGE:	150V MAX
AMPERAGE:	4A MAX
TEMPERATURE:	-40°C to 70°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH
	DRAWN DATE	07/15/2022
	CHECKED BY	ADM
	CHECK DATE	07/18/2022
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	JDN-850-005-E000	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1