



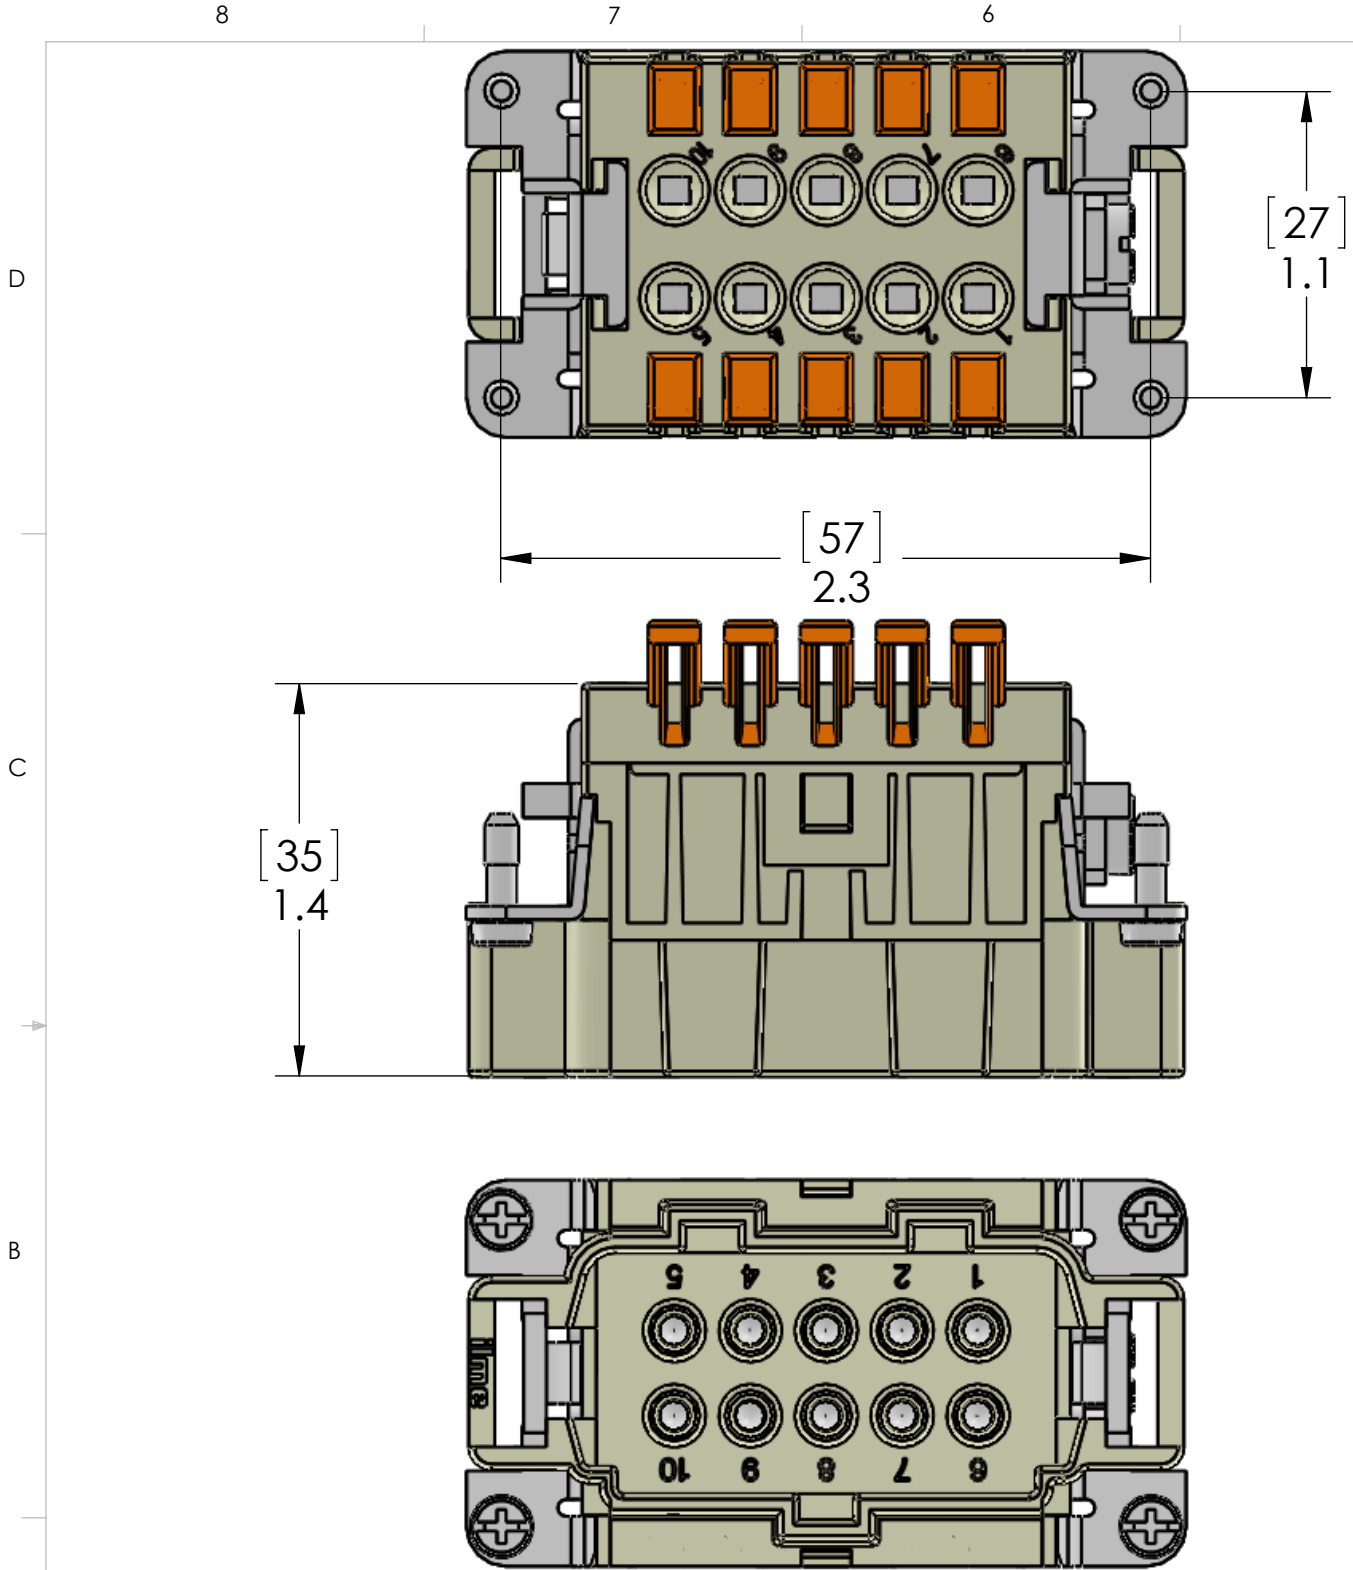

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	10/10/2014	

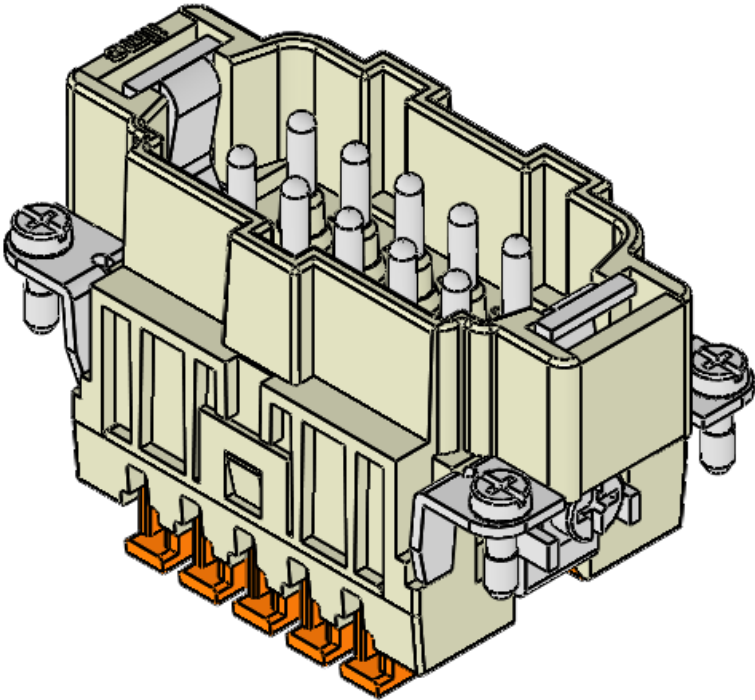

Connection made via spring clamp.

To use: Strip Wires 0.35" - 0.43" (9 - 11mm)
Placed stripped wire into opening and press down on orange tab. This will lock the wire into place. Proceed to next terminal.
(ferruled wires may be used as well)

Acceptable wire AWG: 14 - 24AWG [2.5 - 0.25 sqmm]

MATERIALS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
	NICKEL PLATED BRASS HARDWARE
SCREWS:	NICKEL PLATED STEEL
CONTACTS:	TIN PLATED COPPER ALLOY
RATINGS:	UL / CSA - 600V, 16A. EN 500V/6kV/3, 16A
TEMP:	-40°C - +125°C ambient
APPROVALS:	UL, CSA, & CCC

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION	
		DRAWN		
		CHECKED		
		ENG APPR.		
		MFG APPR.		
MATERIAL		Q.A.	TITLE:	
FINISH		COMMENTS:		
DO NOT SCALE DRAWING		SIZE	DWG. NO.	REV
		B	JSHM-10	A
		SCALE: 3:2	WEIGHT:	SHEET 1 OF 1