

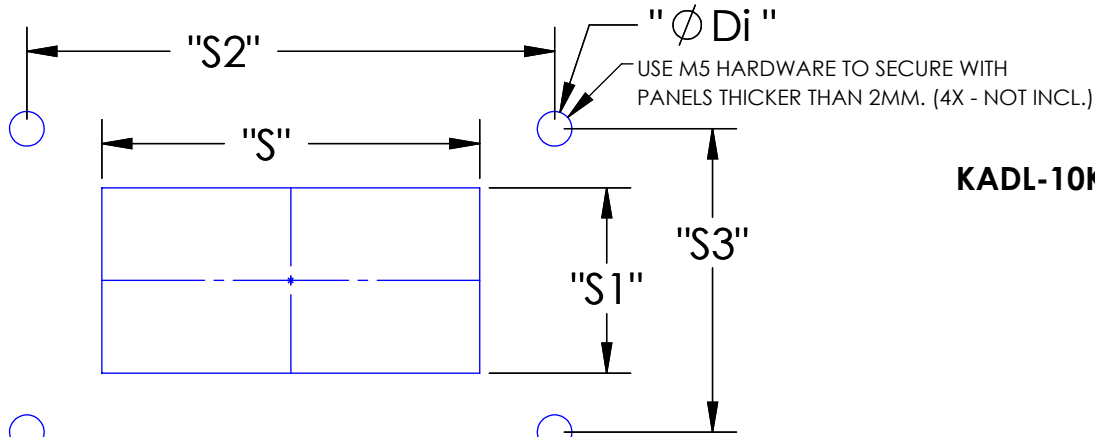


PANEL CUTOUT TABLE					
PART NUMBER:	"S" MM	"S1" MM	"S2" MM	"S3" MM	"Di" MM
KADL-5K	125	35	140	50	7
KADL-10K	125	57.5	140	72.5	7
KADL-15K	125	80	140	95	7
KADL-20K	125	102.5	140	117.5	7
KADL-25K	125	125	140	140	7

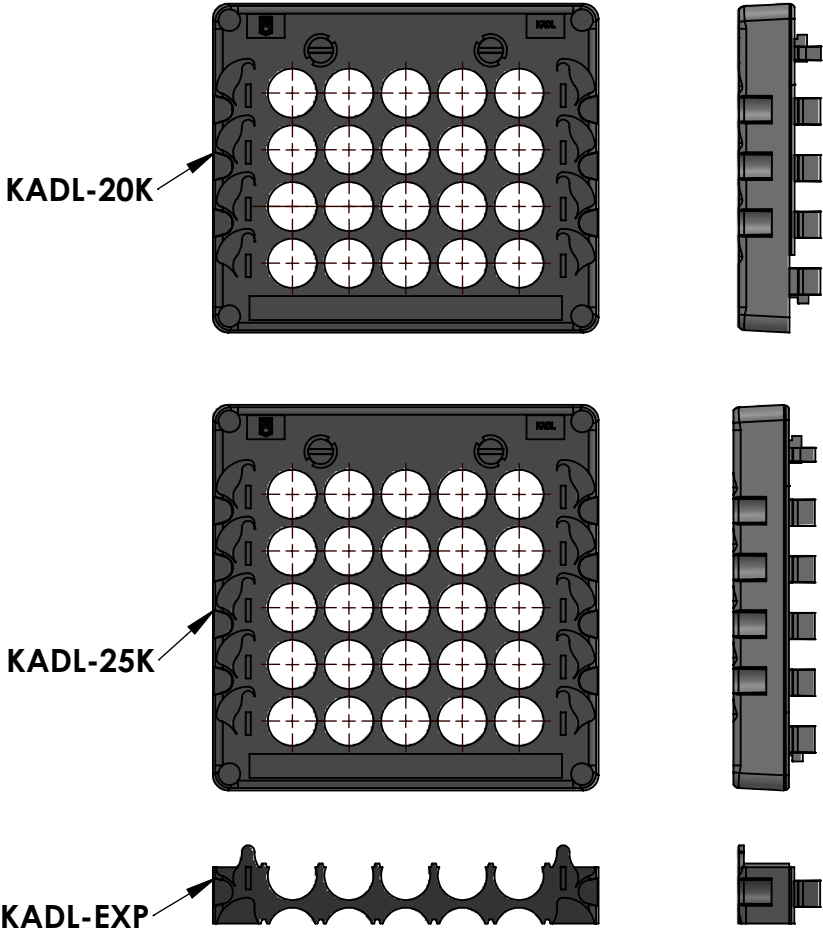

PANEL CUTOUT

NOTE: KADL-EXP IS AN EXPANSION INSERT FOR ADDING 5 HOLES IN AN EXISTING 5, 10, 15, 20 HOLE FRAME. REQUIRED PANEL CUTOUT WILL CHANGE ACCORDING TO THE NUMBER OF EXPANSIONS USED. MAXIMUM FRAME SIZE NOT TO EXCEED 25 HOLES. GROMMETS MUST BE ORDERED SEPARATELY AS ACCESSORIES OF THE KADL CABLE SYSTEM. REF. DRAWING TKG-ZZ

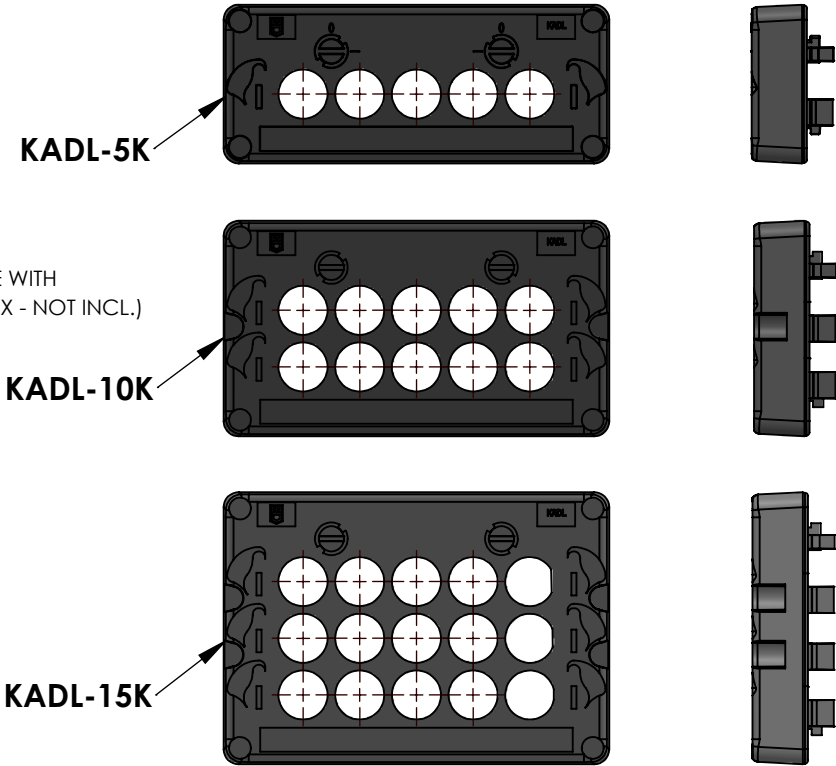

KADL-EXP
REF. NOTE:

SYSTEM FEATURES						
MODULAR DESIGN						
HIGH PACKAGING DENSITY						
TOOL FREE ENTRY AND CONNECTION						
STRAIN RELIEF FOR CABLES						
EASY ENLARGENTS AND ADJUSTMENTS						
CLAMPING RANGE 3MM - 16MM						

PART NUMBER:	# OF ENTRIES	HOLE GROUP SIZE MM	"L" MM	"L1" MM	"H" MM	"H1" MM
KADL-5K	5	125 X 35	153	63	32.3	8.9
KADL-10K	10	125 X 57.5	153	85.5	32.3	8.9
KADL-15K	15	125 X 80	153	108	32.3	8.9
KADL-20K	20	125 X 102.5	153	130.5	32.3	8.9
KADL-25K	25	125 X 125	153	153	32.3	8.9
KADL-EXP	PLUS 5	N/A	153	27	32.3	8.9

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	DCG
DIMENSIONS ARE IN MM		DRAWN DATE	05/30/2017
		CHECKED BY	ADM
		CHECK DATE	05/30/2017
MATERIAL		COMMENTS:	
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION

TITLE:
KADL MODULAR CABLE
ENTRY SYS

SIZE B	DWG. NO. KADL-ZZ	REV A
SCALE: 1:1		WEIGHT:
		SHEET 1 OF 1

MATERIAL SPECIFICATIONS:	
RATING:	IP65 (WHEN USED W/ APPROPRIATELY SIZED TKG GROMMETS)
BODY:	POLYAMIDE PA6 V-0
TEMP:	30 C TO +100C (22 F TO +212 F)

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.