

Recommended cable gland for M20 opening (ordered separately):
Plastic (gray polyamide): PCG-M20R (for 5-9mm dia. cables)
PCG-M20 (for 10-14mm dia. cables)



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	6/4/2014	JJH

D

C

B

A

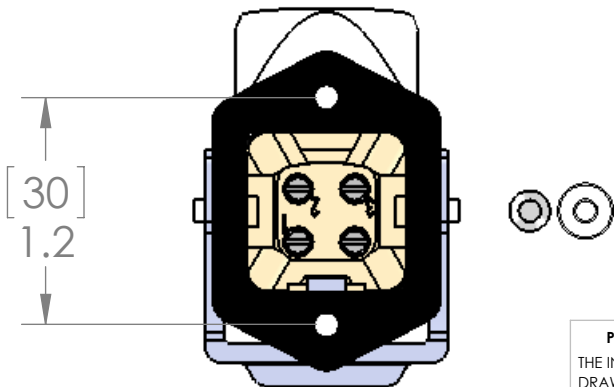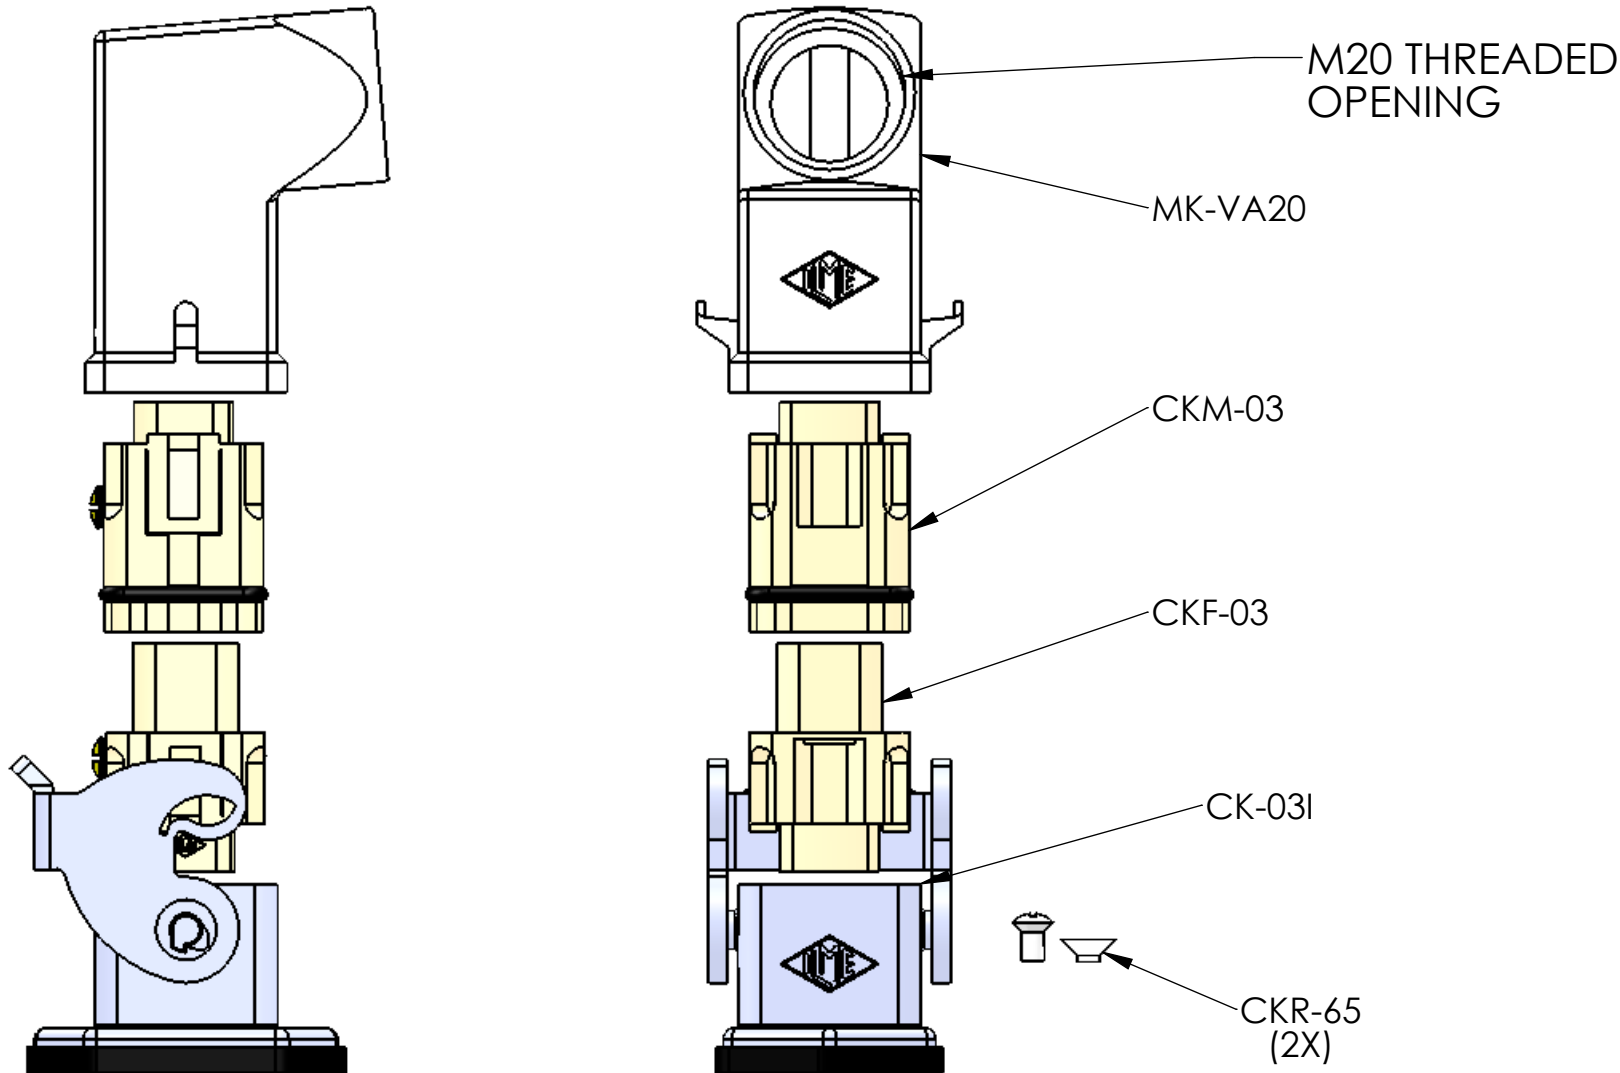

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

Environmental Ratings:

NEMA / UL: 4, 4X, 12

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

MATERIALS	
BODY:	WHITE THERMOPLASTIC
GASKET:	THERMOPLASTIC ELASTOMER
LEVERS:	WHITE THERMOPLASTIC
INSERTS:	GLASS REINFORCED THERMOPLASTIC
CONTACTS:	SILVER PLATED COPPER ALLOY

NAME		MENCOM CORPORATION	
DRAWN	RSC	TITLE:	
CHECKED		CK3 M-F, PLSTC RA HD & BS M20	
ENG APPR.			
MFG APPR.			
Q.A.			
COMMENTS:			
SIZE	DWG. NO.	REV	
B	KMNLT-03IO20	A	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	

D

C

B

A