

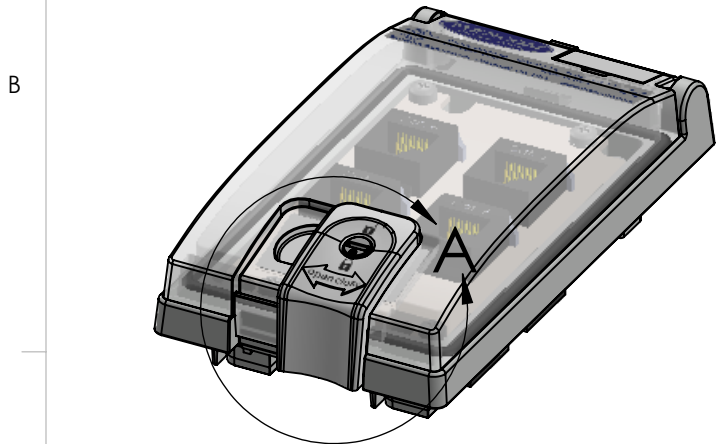


PANEL CUTOUT

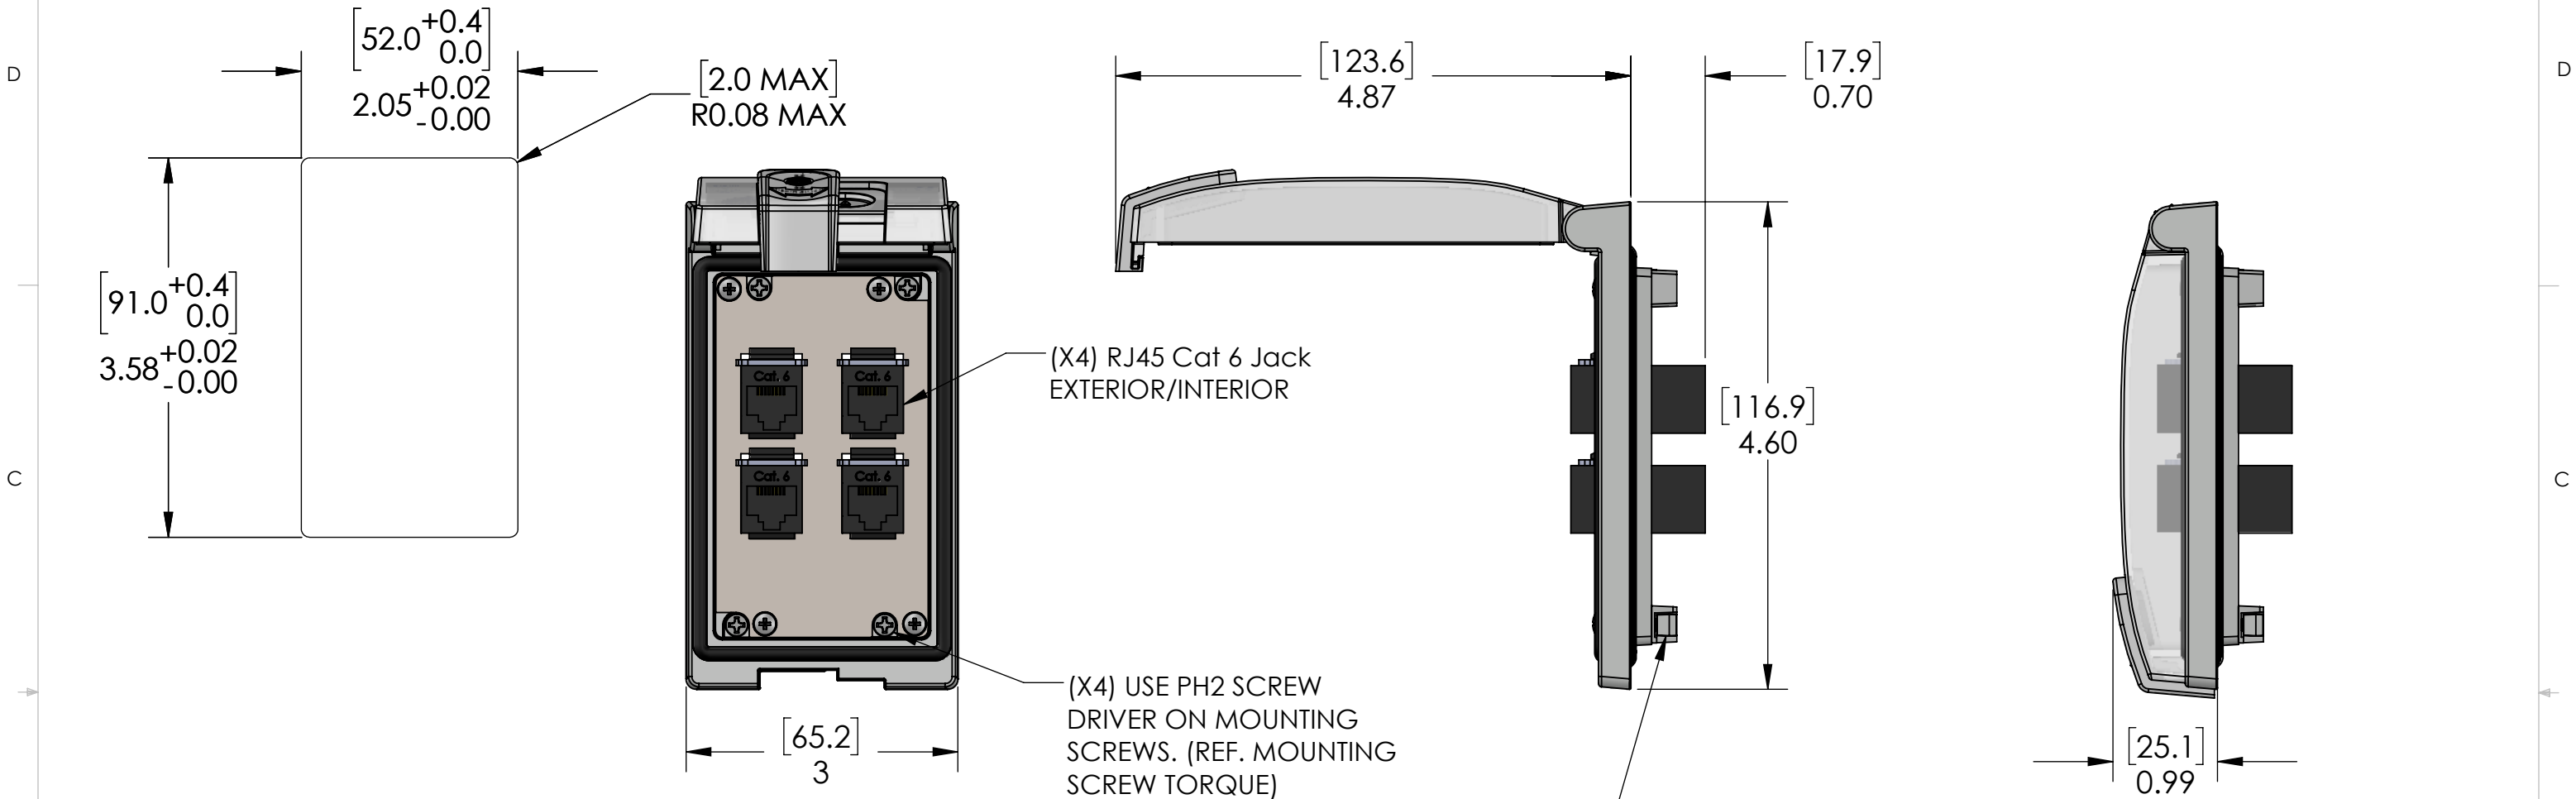

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

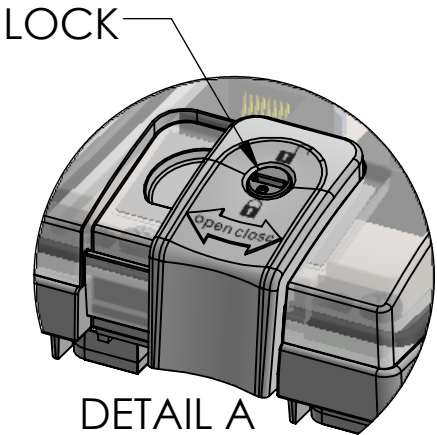

ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.



OPERATING TEMPERATURE: $(-10^{\circ}\text{C} / +60^{\circ}\text{C} (+14^{\circ}\text{F} / +140^{\circ}\text{F}))$

HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

PIC RATINGS/SPECIFICATIONS					
NEMA/UL EN 60529:			4, 12 IP65		
PANEL THICKNESS:			5.0mm max		
MOUNTING SCREW TORQUE:			0.8N-m		
DRAWN BY	DG	MENCOM CORPORATION			
DRAWN DATE	02/18/2019				
CHECKED BY	DCG	TITLE: 4 RJ45; LP1			
CHECK DATE	02/19/2019				
COMMENTS:		SIZE	DWG. NO.		REV
		B	LP1-4RJ45		A
		SCALE: 2:3	WEIGHT:	SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.