
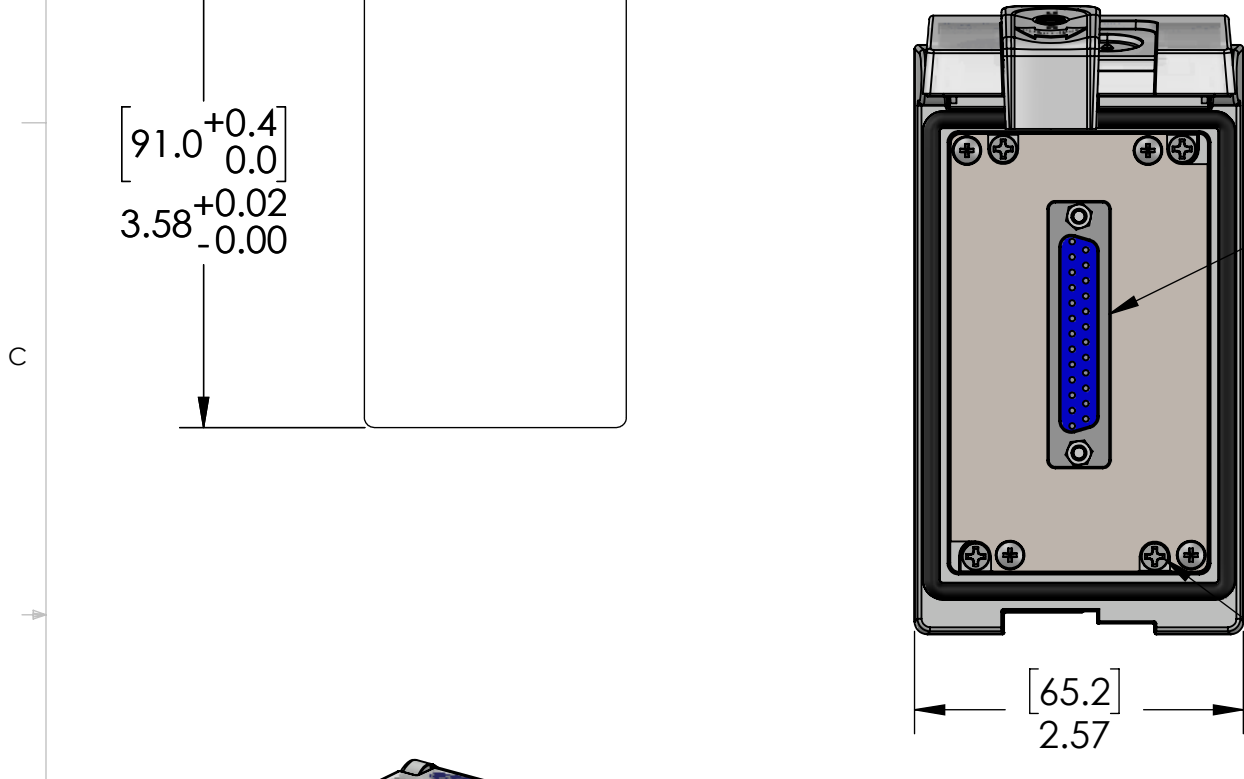


PANEL CUTOUT



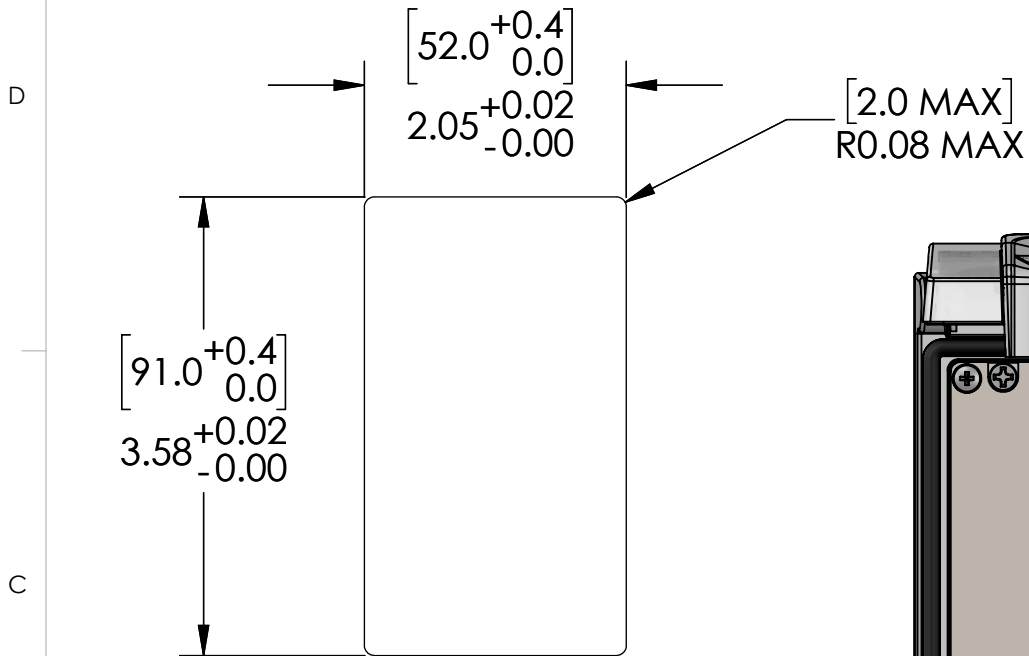


D-SUB CONFIGURED
FEMALE EXTERIOR /
MALE INTERIOR


(X4) USE PH2 SCREW
DRIVER ON MOUNTING
SCREWS. (REF. MOUNTING
SCREW TORQUE)

ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!

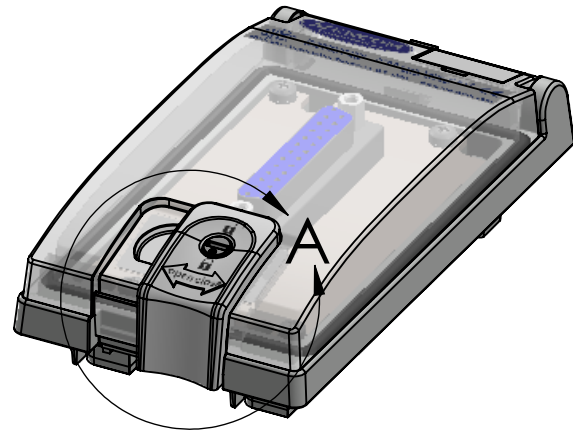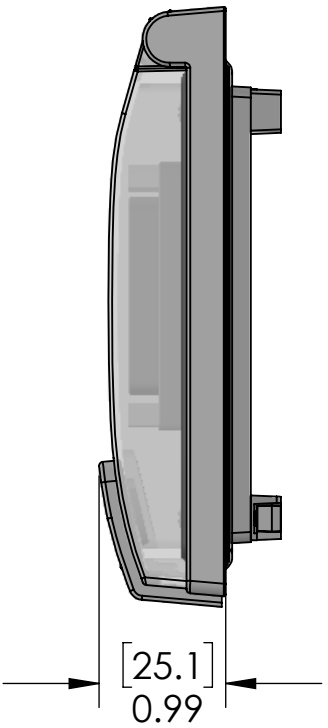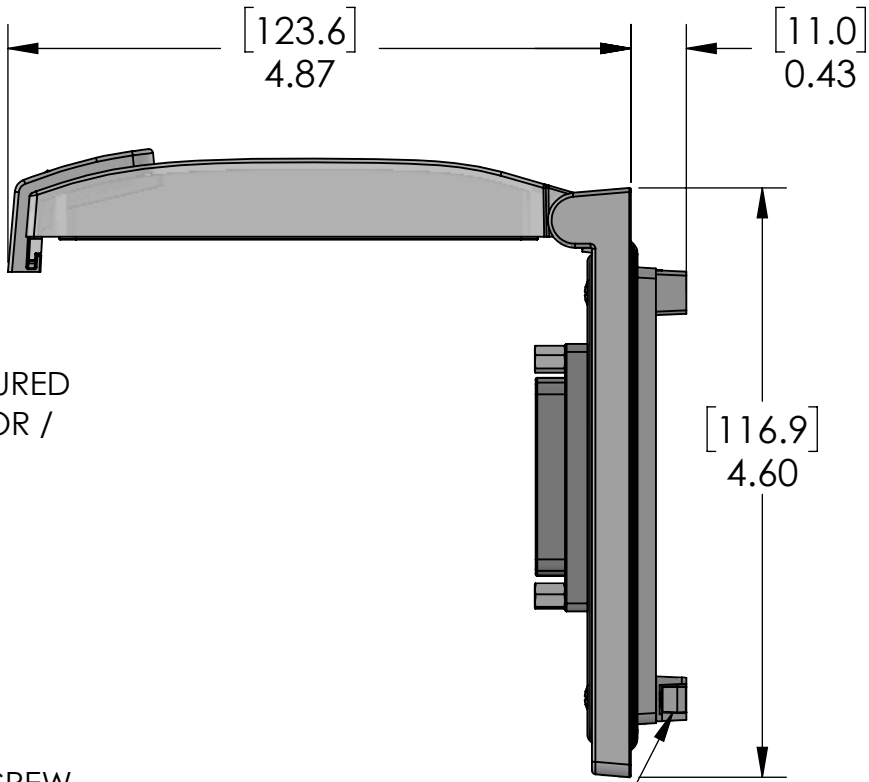

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

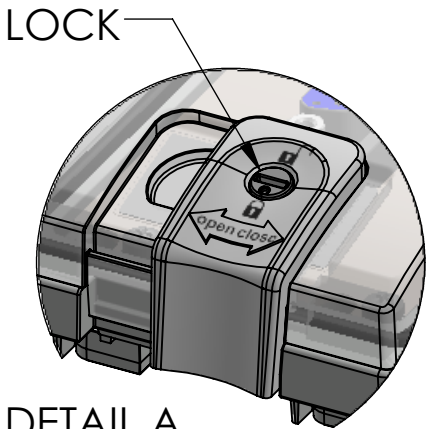

DETAIL A
SCALE 1 : 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

OPERATING TEMPERATURE: (-40°C / +105° C (-40° F / +221° F))	
HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT
BACK COVER:	POLYPROPYLENE



These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS				
NEMA/UL EN 60529:		4, 12 IP65		
PANEL THICKNESS:		5.0mm max		
MOUNTING SCREW TORQUE:		0.8N-m		
DRAWN BY	DG	MENCOM CORPORATION TITLE: DB25; LP1		
DRAWN DATE	09/28/2017			
CHECKED BY	JJH			
CHECK DATE	09/28/2017			
COMMENTS:		SIZE	DWG. NO.	REV
		B	LP1-DB25	B
		SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	