

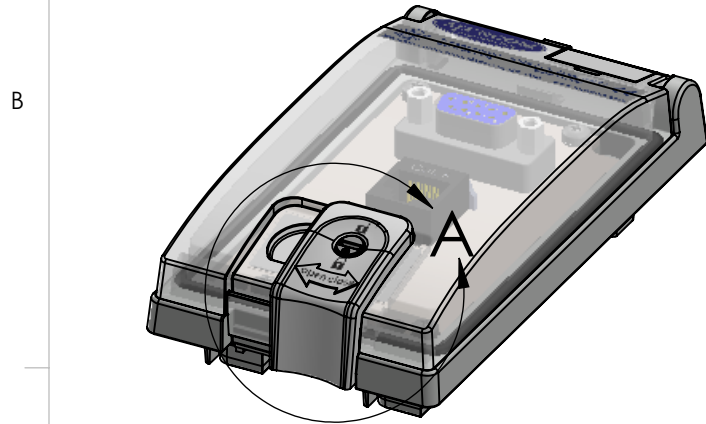


PANEL CUTOUT

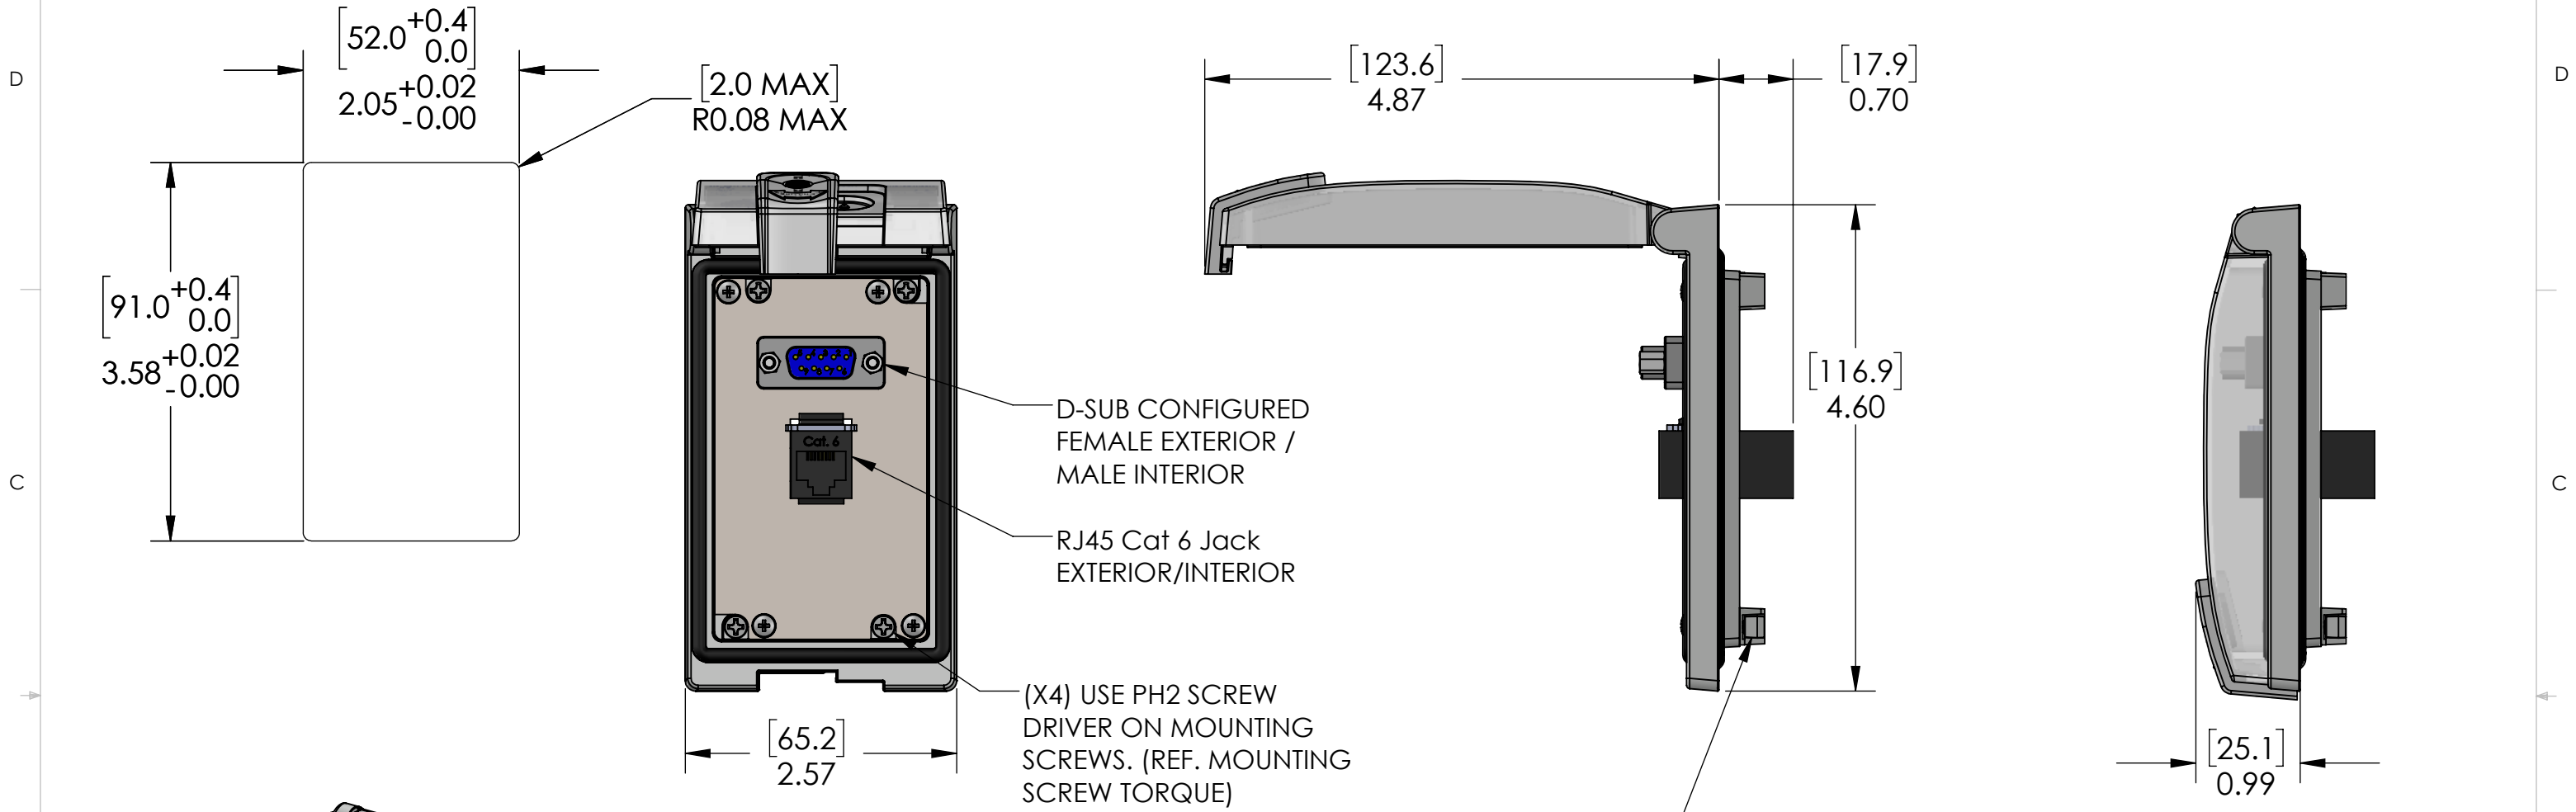

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

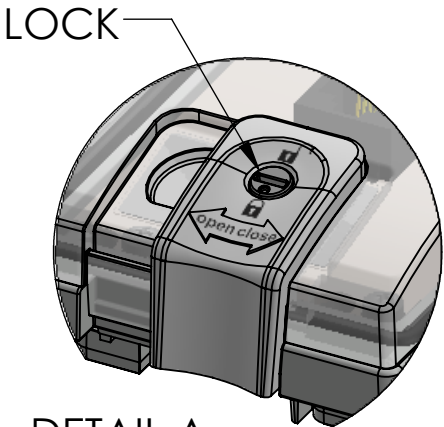

DETAIL A
SCALE 1 : 1

ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!



These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

OPERATING TEMPERATURE:		(-10°C / +60° C (+14° F / +140° F))		MOUNTING SCREW TORQUE:		0.8N-m	
HOUSING MATERIALS BODY: NICKEL PLATED ZINC GASKETS: PUR FIPG FRONT COVER: POLYCARBONATE LATCH & LOCK: PBT				UNLESS OTHERWISE SPECIFIED:		MENCOM CORPORATION	
				DIMENSIONS ARE IN INCHES AND [MM]			
				DRAWN BY: DG			
				DRAWN DATE: 09/22/2017			
				CHECKED BY: DWM			
				CHECK DATE: 09/22/2017		TITLE: DB9; RJ45; LP1	
				COMMENTS:			
IDENTIAL D IN THIS TY OF Y S A WHOLE ION OF				MATERIAL		SIZE	
				FINISH		DWG. NO.	
						LP1-DB9-RJ45	
				DO NOT SCALE DRAWING		REV	
						A	
				SCALE: 2:3		WEIGHT:	
						SHEET 1 OF 1	