


PANEL CUTOUT

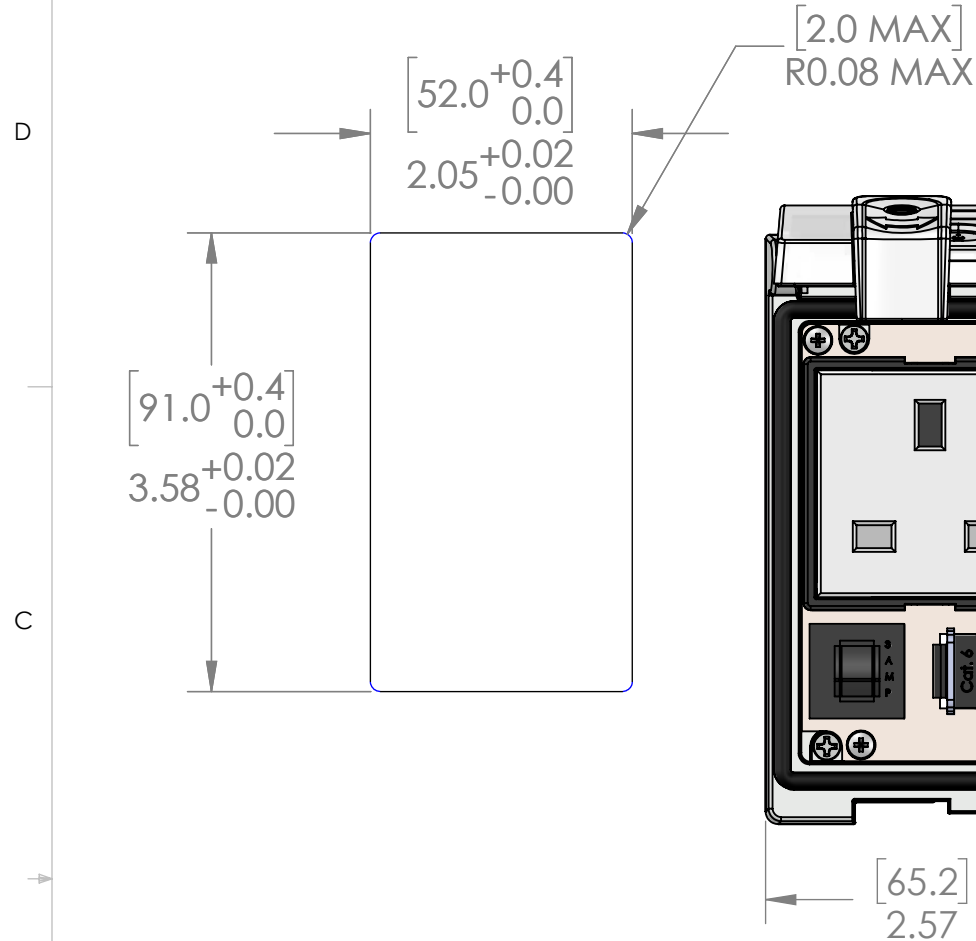


BRITISH, UNITED KINGDOM, UK BS1363A, SAUDI ARABIA SASO 2203 13 AMP-250 VOLT, 45mmX45mm SIZE MODULAR OUTLET (SA1-13R) (UK1-13R) TYPE G SOCKET, SHUTTERED CONTACTS, POLE- 3 WIRE GROUNDING (2P+E). ASTA, SASO 2203 (INTERTEK), PSB (TUV), G MARK APPROVED.

RJ45 Cat 6 Jack EXTERIOR/INTERIOR


(X4) USE PH2 SCREW DRIVER ON MOUNTING SCREWS. (REF. MOUNTING SCREW TORQUE)

ROTATE TWO TURNS COUNTER CLOCKWISE TO RELEASE THE TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO THEIR CLAMPING POSITION AS MOUNTING SCREWS TIGHTEN. DO NOT OVER-TORQUE!

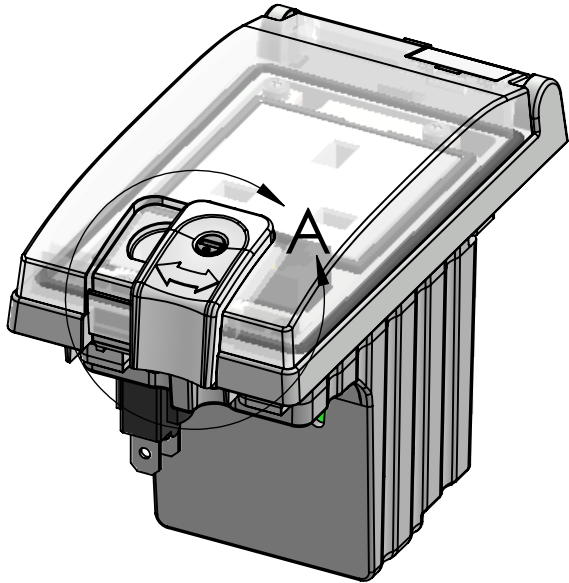

SLIDE LATCH TO OPEN/CLOSE  
ROTATE LOCK TO LOCK CLOSED

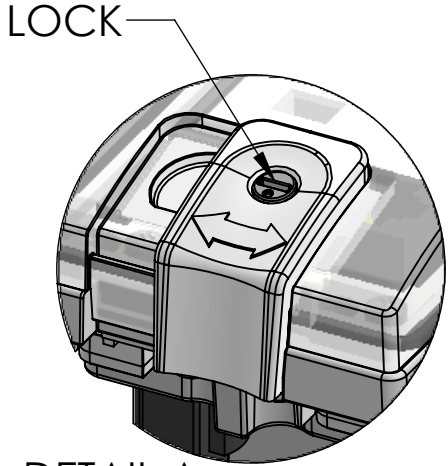

DETAIL A  
SCALE 1 : 1

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

OPERATING TEMPERATURE: (-5°C / +50° C (+23° F / +122° F ))		UNLESS OTHERWISE SPECIFIED:	
HOUSING MATERIALS		DIMENSIONS ARE IN INCHES AND [MM]	
BODY:	NICKEL PLATED ZINC		
GASKETS:	PUR FIPG		
FRONT COVER:	POLYCARBONATE		
LATCH & LOCK:	PBT		
BACK COVER:	POLYPROPYLENE		
		MATERIAL	
		FINISH	
		DO NOT SCALE DRAWING	

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS			
VOLTS:		250V	
AMPS:		3A	
SCCR:		0.2kA	
NEMA/UL   EN 60529:		4, 12   IP65	
PANEL THICKNESS:		5.0mm max	
MOUNTING SCREW TORQUE:		0.8N-m	
TERMINAL BLOCK TORQUE:		0.5N-m	
INCOMING POWER WIRE SIZE:		0.25 - 2.5 sq mm / 24-12AWG	
WIRE STRIP LENGTH:		7 - 8 mm	
DRAWN BY	DCG	MENCOM CORPORATION  TITLE:  BRITISH RCPT; RJ45; 3A; LP1	
DRAWN DATE	06/08/2021		
CHECKED BY	JJH		
CHECK DATE	06/09/2021		
COMMENTS:			
SIZE	DWG. NO.		REV
B	LP1-DUK-RJ45-R		A
SCALE: 2:3		WEIGHT:	SHEET 1 OF 1