
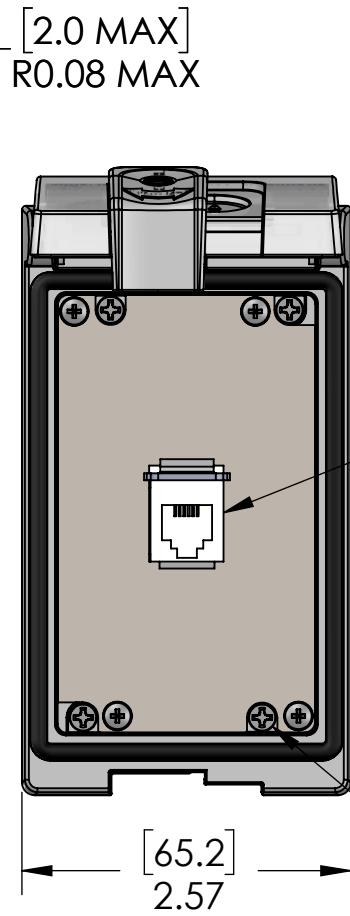


PANEL CUTOUT

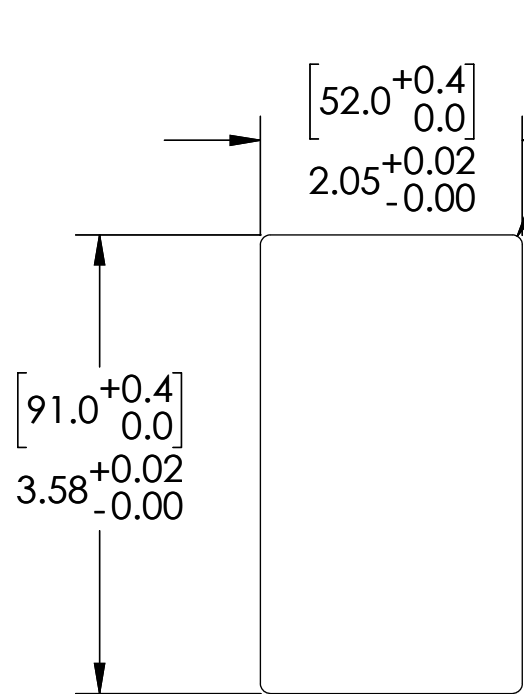




RJ11/12 Jack  
EXTERIOR/INTERIOR

NOTE: RJ11 JACK IS TECHNICALLY AN RJ12 JACK IN THAT IT HAS ALL 6 CONTACTS. IT IS SUITABLE FOR USE WITH ALL RJ11 AND RJ12 APPLICATIONS.


(X4) USE PH2 SCREW DRIVER ON MOUNTING SCREWS. (REF. MOUNTING SCREW TORQUE)

ROTATE TWO TURNS COUNTER CLOCKWISE TO RELEASE THE TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO THEIR CLAMPING POSITION AS MOUNTING SCREWS TIGHTEN. DO NOT OVER-TORQUE!

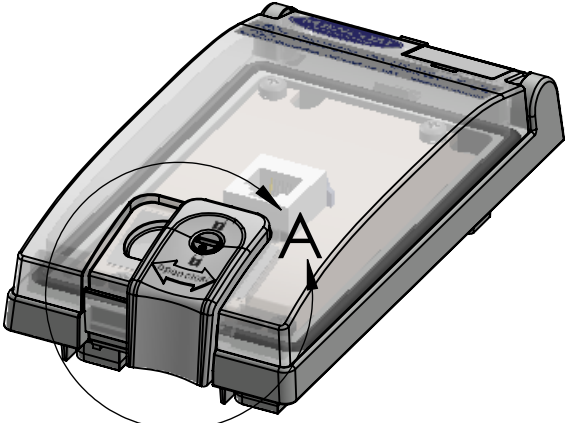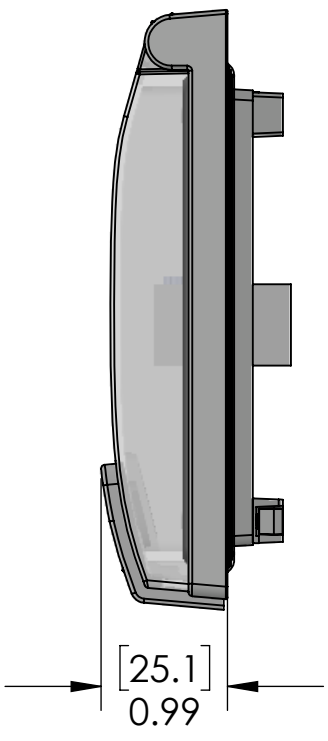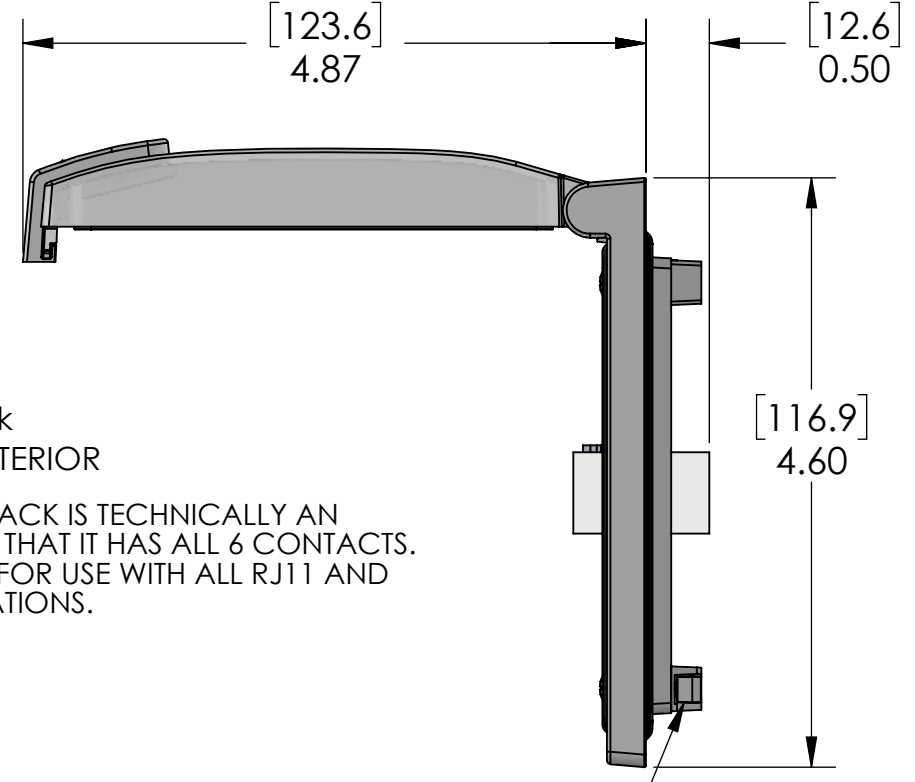

SLIDE LATCH TO OPEN/CLOSE  
ROTATE LOCK TO LOCK CLOSED

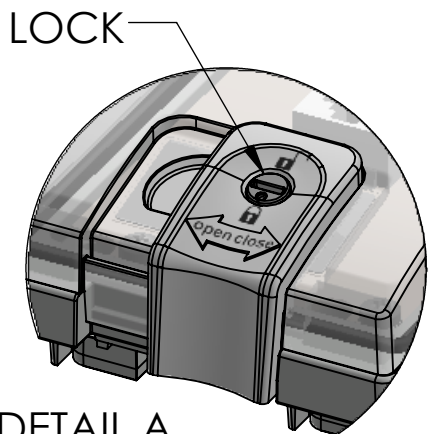

DETAIL A  
SCALE 1 : 1

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.



PIC RATINGS/SPECIFICATIONS		
NEMA/UL   EN 60529:	4, 12	IP65
PANEL THICKNESS:	5.0mm max	
MOUNTING SCREW TORQUE:	0.8N-m	

OPERATING TEMPERATURE: (0°C / +70° C (+32° F / +158° F ))		UNLESS OTHERWISE SPECIFIED:
HOUSING MATERIALS		DIMENSIONS ARE IN INCHES AND [MM]
BODY:	NICKEL PLATED ZINC	
GASKETS:	PUR FIPG	
FRONT COVER:	POLYCARBONATE	
LATCH & LOCK:	PBT	

DRAWN BY:	DG
DRAWN DATE:	03/15/2022
CHECKED BY:	DCG
CHECK DATE:	03/15/2022

**MENCOM CORPORATION**

TITLE:  
**RJ11/12; LP1**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

COMMENTS:

SIZE	DWG. NO.	REV
<b>B</b>	LP1-RJ11	<b>B</b>
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1