



PANEL CUTOUT

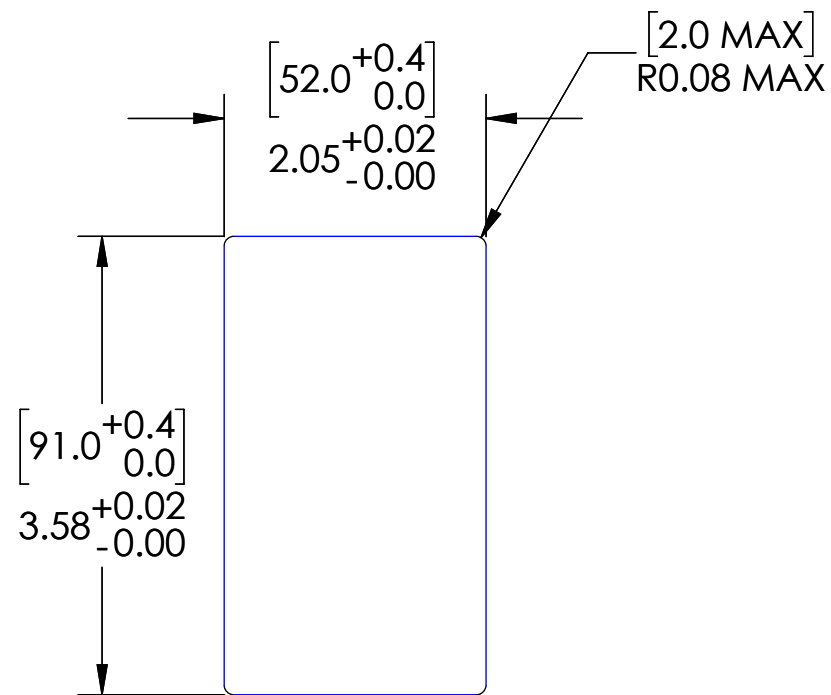

CHINA 10 AMPERE-250 VOLT, GB 1002, GB 2099 (CH1-10R) MODULAR OUTLET, TYPE I, 45mmX45mm SIZE, SNAP-IN MOUNTING, SHUTTERED CONTACTS, 2 POLE-3 WIRE GROUNDING (2P+E)

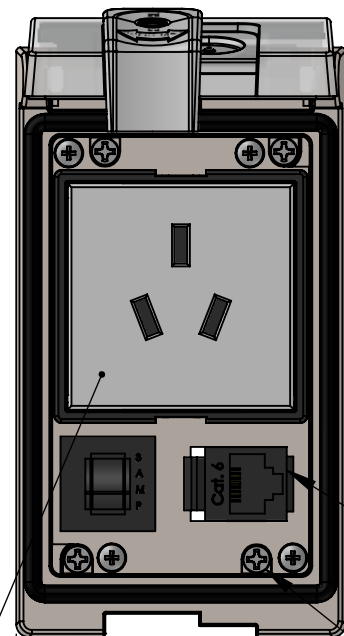


RJ45 Cat. 6 Jack
EXTERIOR/INTERIOR

(X4) USE PH2 SCREW DRIVER ON MOUNTING SCREWS. (REF. MOUNTING SCREW TORQUE)

65.3
2.57


ROTATE TWO TURNS COUNTER CLOCKWISE TO RELEASE THE TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO THEIR CLAMPING POSITION AS MOUNTING SCREWS TIGHTEN. DO NOT OVER-TORQUE!

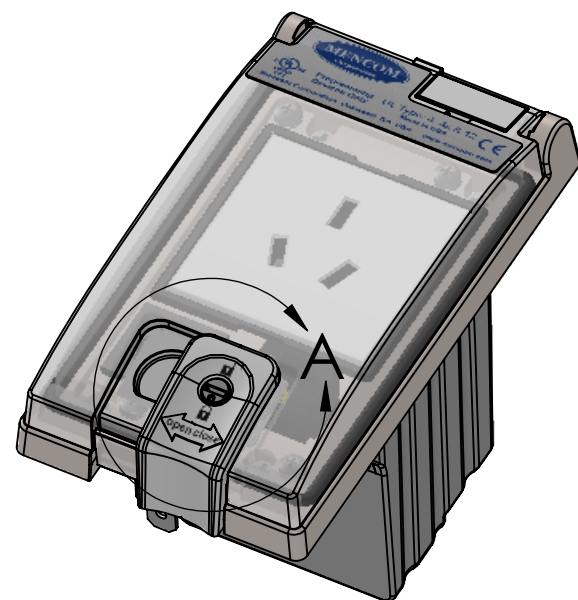

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

LOCK

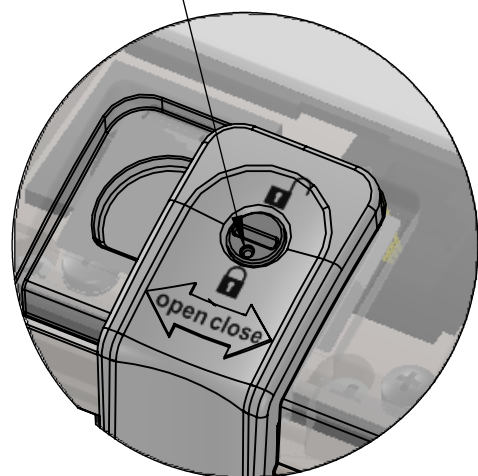

DETAIL A
SCALE 4 : 3

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.


OPERATING TEMPERATURE: $(-5^{\circ}\text{C} / +50^{\circ}\text{C} (+23^{\circ}\text{F} / +122^{\circ}\text{F}))$

HOUSING MATERIALS		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]
BODY:	316 STAINLESS STEEL	
GASKETS:	PUR FIPG	
FRONT COVER:	POLYCARBONATE	
LATCH & LOCK:	PBT	
BACK COVER:	POLYPROPYLENE	

MATERIAL

FINISH

DO NOT SCALE DRAWING

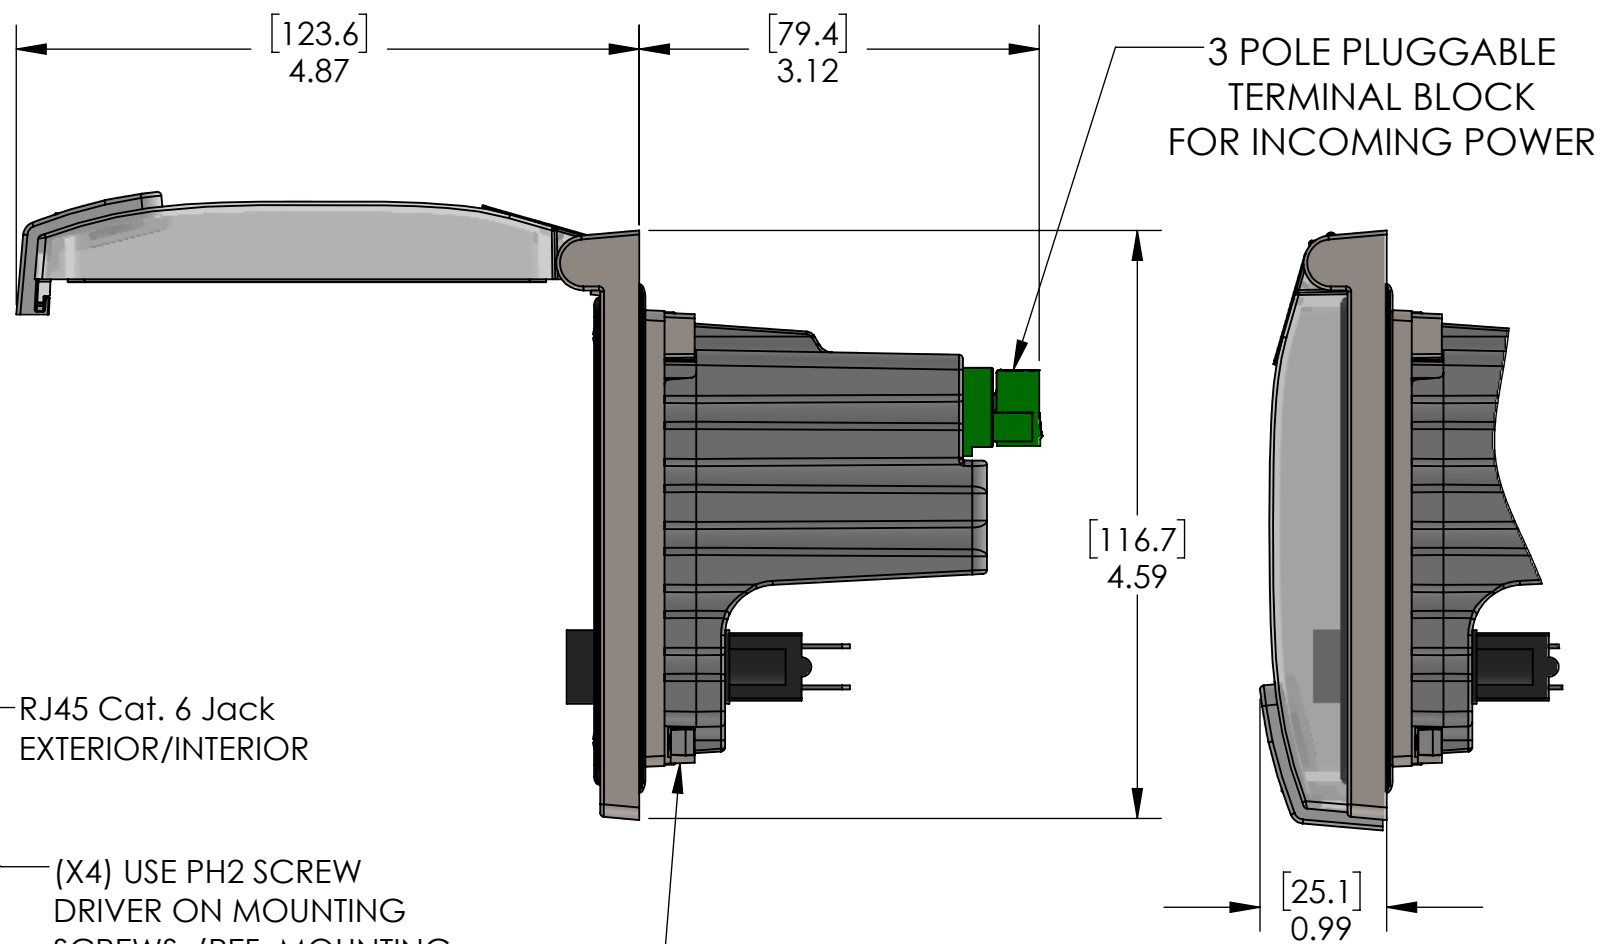

3 POLE PLUGGABLE
TERMINAL BLOCK
FOR INCOMING POWER

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
PANEL THICKNESS:	5.0mm max
MOUNTING SCREW TORQUE:	0.8N-m
TERMINAL BLOCK TORQUE:	0.5N-m
INCOMING POWER WIRE SIZE:	0.25 - 2.5 sq mm / 24-12AWG
WIRE STRIP LENGTH:	7 - 8 mm

DRAWN BY	DCG	MENCOM CORPORATION	
DRAWN DATE	11/09/2023		
CHECKED BY	JJH		
CHECK DATE	11/09/2023		
COMMENTS:		TITLE:	
		CHINA 10A RCPT; RJ45; 3A; LP1SS	
SIZE	DWG. NO.	REV	
B	LP1SS-CH1-RJ45-R	A	
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1	