
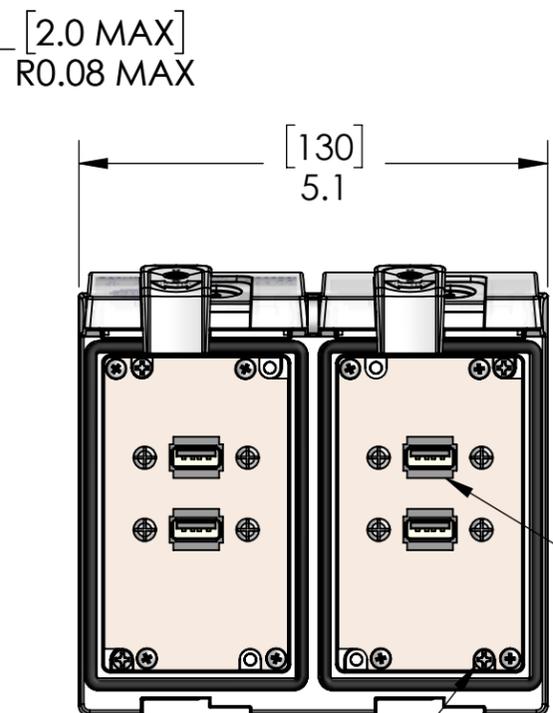


PANEL CUTOUT


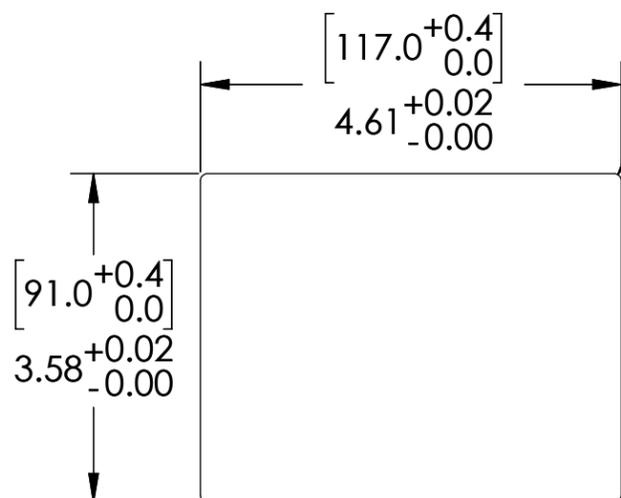


(4X) USB PCBL TYPE A FEMALE EXTERIOR/MALE INTERIOR


(X4) USE PH2 SCREW DRIVER ON MOUNTING SCREWS. (REF. MOUNTING SCREW TORQUE)

ROTATE TWO TURNS COUNTER CLOCKWISE TO RELEASE THE TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO THEIR CLAMPING POSITION AS MOUNTING SCREWS TIGHTEN. DO NOT OVER-TORQUE!

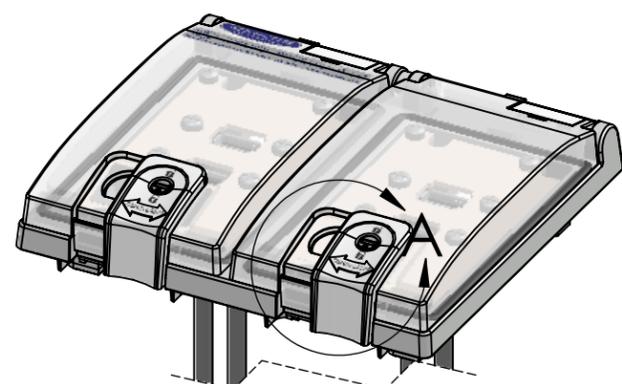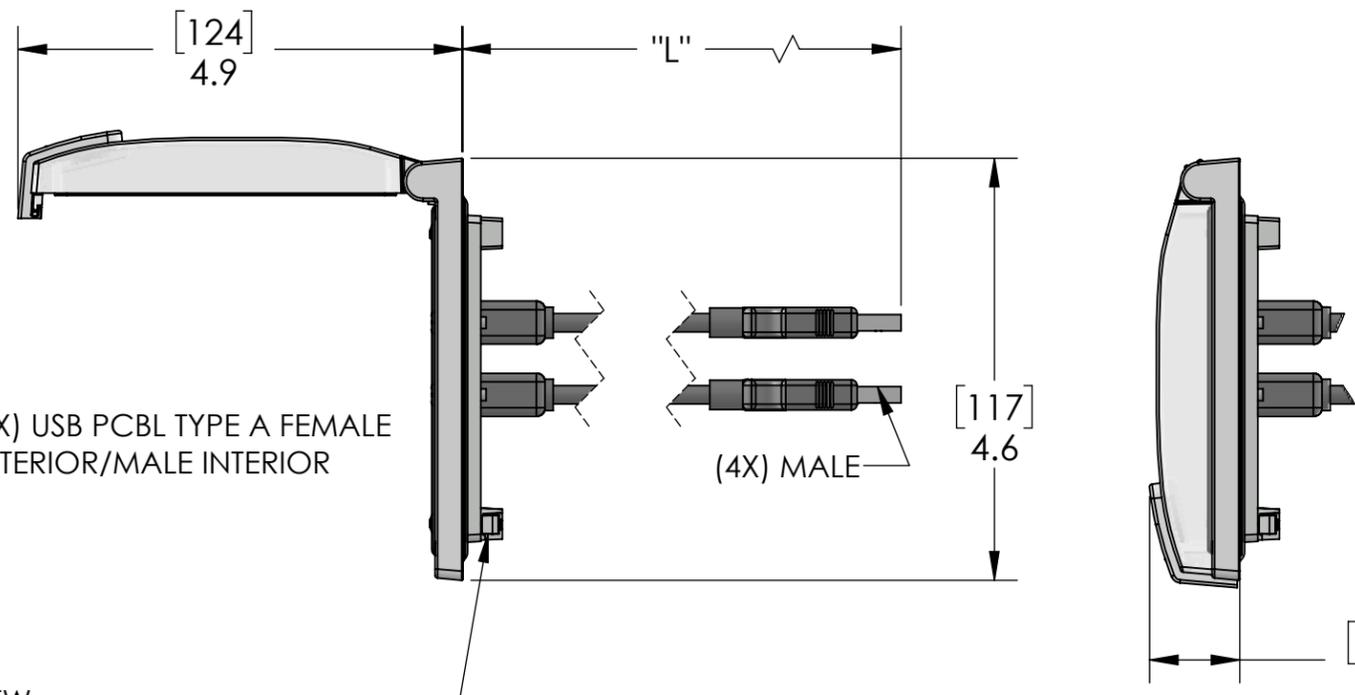

LOCK

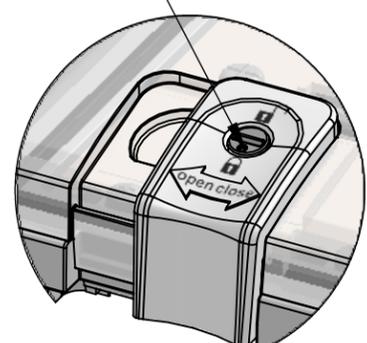

DETAIL A SCALE 1 : 1

SLIDE LATCH TO OPEN/CLOSE ROTATE LOCK TO LOCK CLOSED

PART NUMBER	LENGTH "L"
LP2-4USB-01	1 FOOT
LP2-4USB-03	3 FEET
LP2-4USB-06	6 FEET

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.



PIC RATINGS/SPECIFICATIONS

NEMA/UL   EN 60529:	4, 12   IP65
PANEL THICKNESS:	5.0mm max
MOUNTING SCREW TORQUE:	0.8N-m

OPERATING TEMPERATURE: (-10°C / +80° C (+14° F / +176° F ))

HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

DRAWN BY:	DCG
DRAWN DATE:	08/22/2018
CHECKED BY:	JJH
CHECK DATE:	08/22/2018

MENCOM CORPORATION

TITLE: USB AFAM PCBL X 4; LP2

SIZE	DWG. NO.	REV
<b>B</b>	LP2-4USB-ZZ	<b>A</b>
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.